
WAAS	APP CRS	Rwy Ldg	7398
CH 56339	035°	TDZE	5837
W04A		Apt Elev	5837

RNAV (GPS) RWY 4
DOUBLE EAGLE II (AEG)

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Albuquerque Intl Sunport altimeter setting and increase LPV DA to 6131 feet and LNAV/VNAV DA to 6384 feet, increase all MDA 100 feet, and increase LPV all Cats visibility ⅛ mile, LNAV/VNAV all Cats visibility ⅜ mile, LNAV visibility Cat C/D ¼ mile, and Circling visibility Cats C/D ½ mile. Baro-VNAV and VDP NA when using Albuquerque Intl Sunport altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 46°C (114°F).

MISSED APPROACH: Climb to 6300 then climbing left turn to 8600 direct EYIPE and hold.

ATIS	ALBUQUERQUE APP CON	DOUBLE EAGLE II TOWER ★	GND CON
119.025	127.4 253.5	120.15 (CTAF) L	121.625

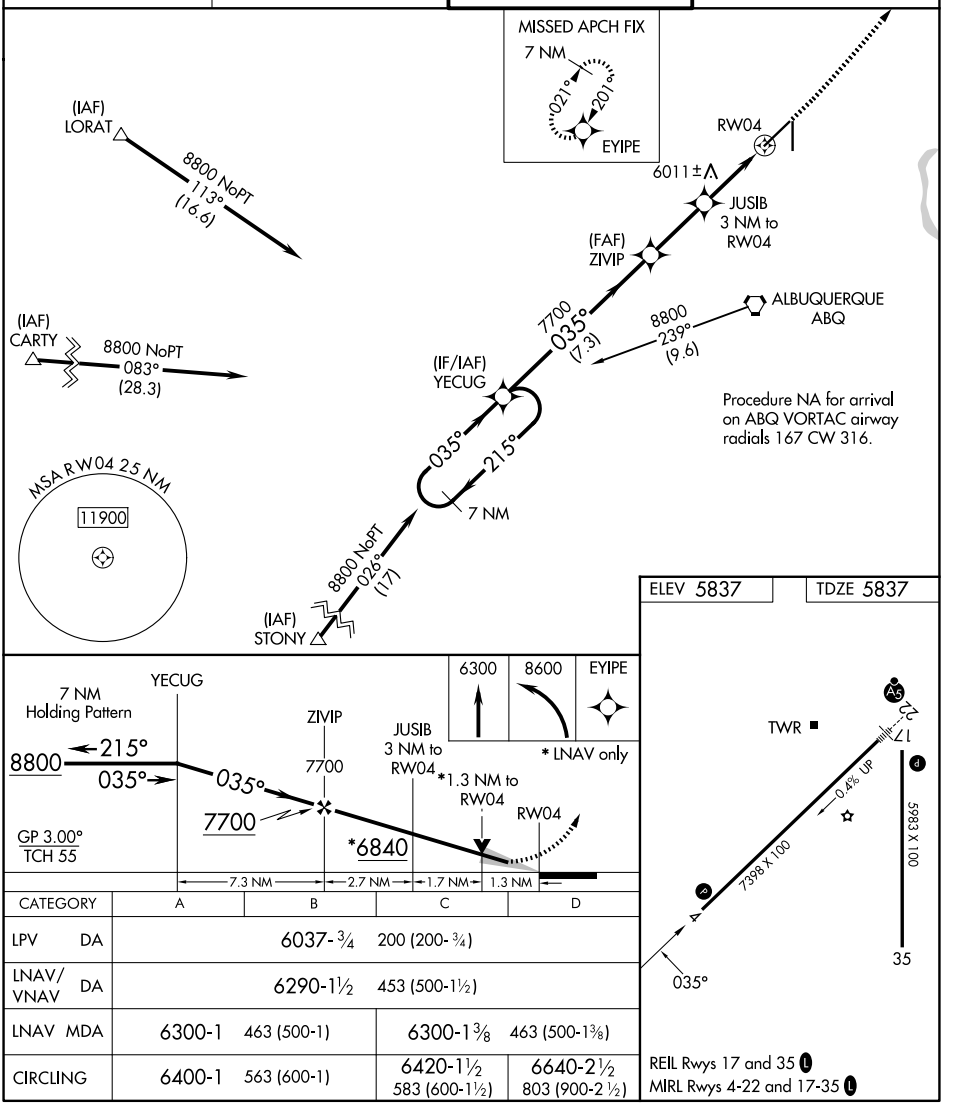

CATEGORY	A	B	C	D
LPV DA	6037-¾ 200 (200-¾)			
LNAV/VNAV DA	6290-1½ 453 (500-1½)			
LNAV MDA	6300-1 463 (500-1)		6300-1⅜ 463 (500-1⅜)	
CIRCLING	6400-1 563 (600-1)		6420-1½ 583 (600-1½)	6640-2½ 803 (900-2½)

REIL Rwys 17 and 35 L
MIRL Rwys 4-22 and 17-35 L

SW-1, 29 OCT 2026 to 26 NOV 2026
SW-1, 29 OCT 2026 to 26 NOV 2026