RNAV (GPS) RWY 23

LINCOLN COUNTY RGNL (IPJ)


WAAS	APP CRS	Rwy Ldg	5501
CH 69210	233°	TDZE	872
W23A		Apt Elev	878


RNP APCH.

When local altimeter setting not received, use Charlotte altimeter setting: increase LPV DA to 1212 feet, LNAV/VNAV DA to 1204 feet and all visibilities ⅛ SM; increase all MDAs 80 feet and visibility Cats C and D ¼ SM. Baro-VNAV and VDP NA when using Charlotte altimeter setting. Rwy 23 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.


MISSED APPROACH: Climb to 3200 direct IWWON and hold.

AWOS-3	CHARLOTTE APP CON	UNICOM
119.675	134.75 257.2	123.05 (CTAF) L

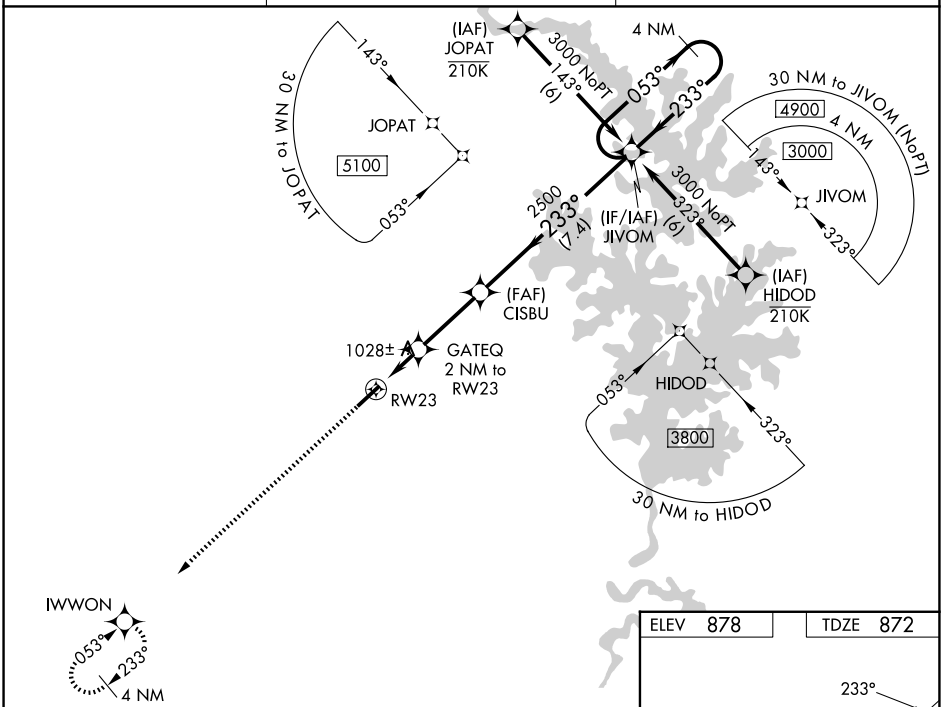

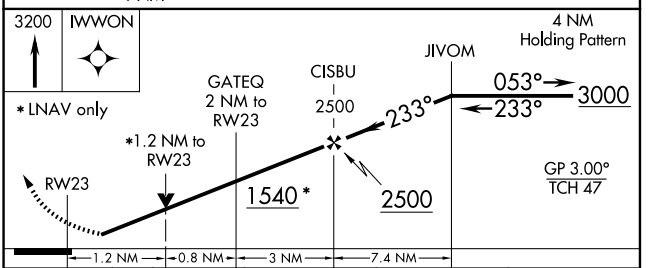

CATEGORY	A	B	C	D
LPV DA	1149-⅞	277 (300-⅞)		
LNAV/VNAV DA	1141-⅞	269 (300-⅞)		
LNAV MDA	1280-1	408 (500-1)	1280-1⅛	408 (500-1⅛)
CIRCLING	1400-1 522 (600-1)	1440-1 562 (600-1)	1660-2¼ 782 (800-2¼)	1660-2½ 782 (800-2½)

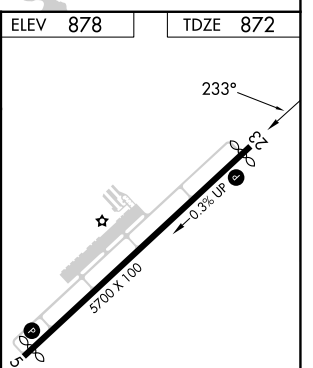

REIL Rwys 5 and 23 L
MIRL Rwy 5-23 L

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026