WAAS CH 87004 W19A	APP CRS 194°	Rwy Ldg 6115 / TDZE 1065 / Apt Elev 1071

RNAV (GPS) RWY 19


GLENDALE RGNL (GEU)


RNP APCH.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 47°C. Rwy 19 helicopter visibility reduction below ¾ SM NA. VDP and Baro-VNAV NA when using Phoenix Sky Harbor Intl altimeter setting. When local altimeter setting not received, use Phoenix Sky Harbor Intl altimeter setting: increase LPV DA to 1384 feet; increase LNAV/VNAV DA to 1617 feet and all Cats visibility ¼ SM; increase all MDA 60 feet and LNAV Cat C and D visibility ¼ SM.

MISSED APPROACH: Climb to 5000 direct AGERE then climb to 8000 on track 132° to POTER and hold.

ATIS	LUKE APP CON★	GLENDALE TOWER★	GND CON	UNICOM
119.425	118.15 363.125	121.0 (CTAF) L	118.0	122.95

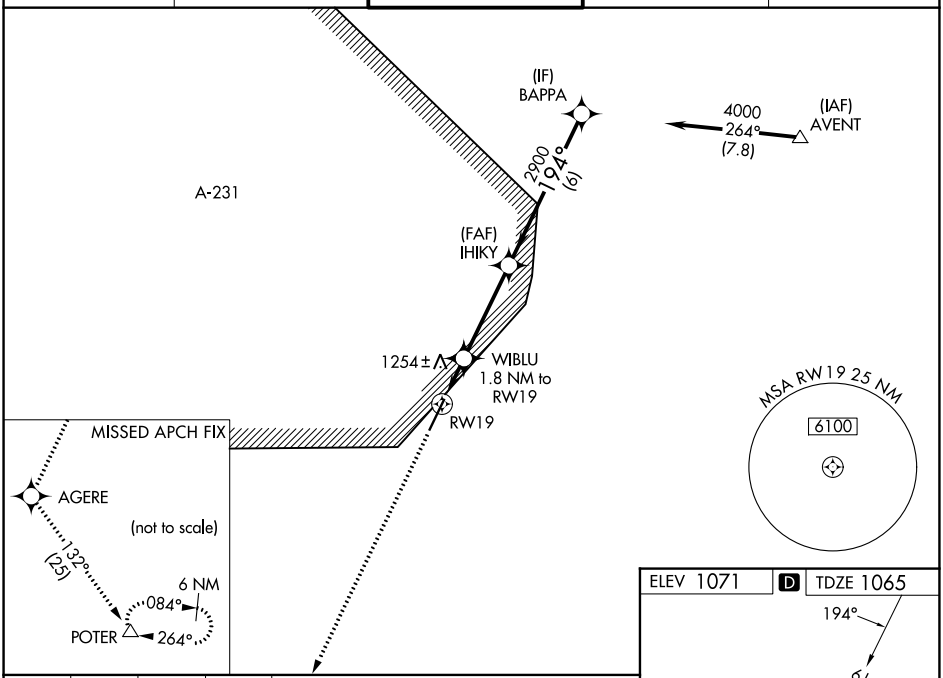

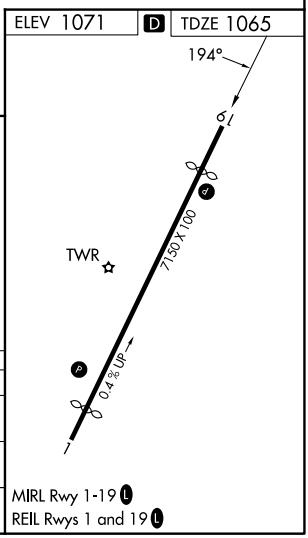

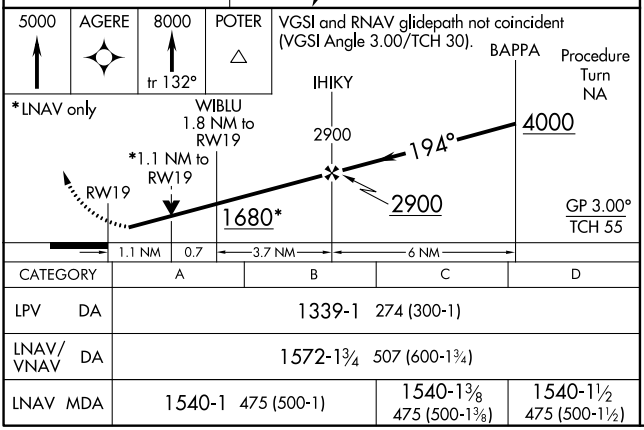

CATEGORY	A	B	C	D
LPV DA	1339-1 274 (300-1)			
LNAV/VNAV DA	1572-1¾ 507 (600-1¾)			
LNAV MDA	1540-1 475 (500-1)		1540-1⅜ 475 (500-1⅜)	1540-1½ 475 (500-1½)

SW-4, 29 OCT 2026 to 26 NOV 2026
SW-4, 29 OCT 2026 to 26 NOV 2026