RNAV (GPS) RWY 17

TAYLOR MUNI (T74)


WAAS	APP CRS	Rwy Ldg	4000
CH 90535	174°	TDZE	600
W17A		Apt Elev	600

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16C or above 54C. When local altimeter setting not received, use Austin Exec altimeter setting and increase all DA to 914 feet and all MDA 40 feet. VDP and Baro-VNAV NA when using Austin Exec altimeter setting.

MISSED APPROACH: Climb to 1100 then climbing right turn to 3100 direct CWK VORTAC and hold.

AWOS-3PT	AUSTIN APP CON	UNICOM
119.75	127.225 317.65	122.8 (CTAF) L

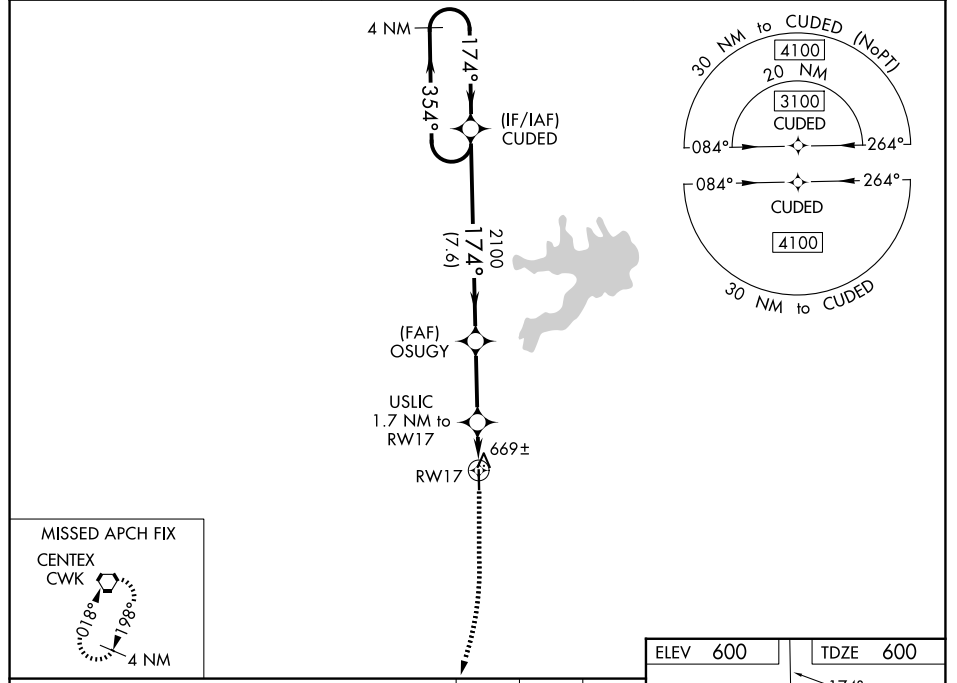


MISSED APCH FIX


VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).

1100 3100 CWK

*LNAV only.

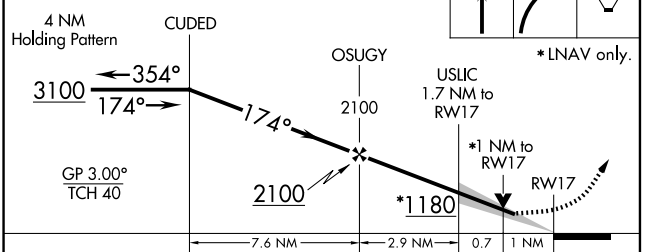

CATEGORY	A	B	C	D
LPV DA	882-⅞	282 (300-⅞)	NA	
LNAV/VNAV DA	882-⅞	282 (300-⅞)	NA	
LNAV MDA	960-1	360 (400-1)	NA	
CIRCLING	1100-1	500 (500-1)	NA	

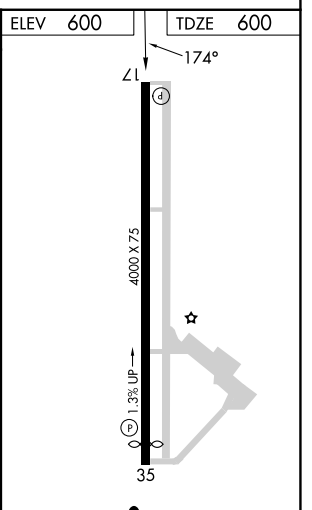

SC-3, 29 OCT 2026 to 26 NOV 2026
SC-3, 29 OCT 2026 to 26 NOV 2026