WAAS CH 58244 W36A	APP CRS 360°	Rwy Ldg 6001	TDZE 1301	Apt Elev 1316

RNAV (GPS) RWY 36

MONETT RGNL (HFJ)


RNP APCH - GPS.


T A Baro-VNAV and VDP NA when using Joplin altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Joplin altimeter setting: increase LPV DA to 1613 feet; increase LNAV/VNAV DA to 1862 feet and all visibilities ⅜ SM; increase all MDAs 120 feet and LNAV visibility Cats C and D ⅜ SM, and Circling visibility Cat C/D ½ SM.

MALSR

MISSED APPROACH: Climb to 3000 direct PHENM and hold.

AWOS-3PT	SPRINGFIELD APP CON	CLNC DEL	UNICOM
118.275	124.95 318.2	121.85	123.075 (CTAF) L

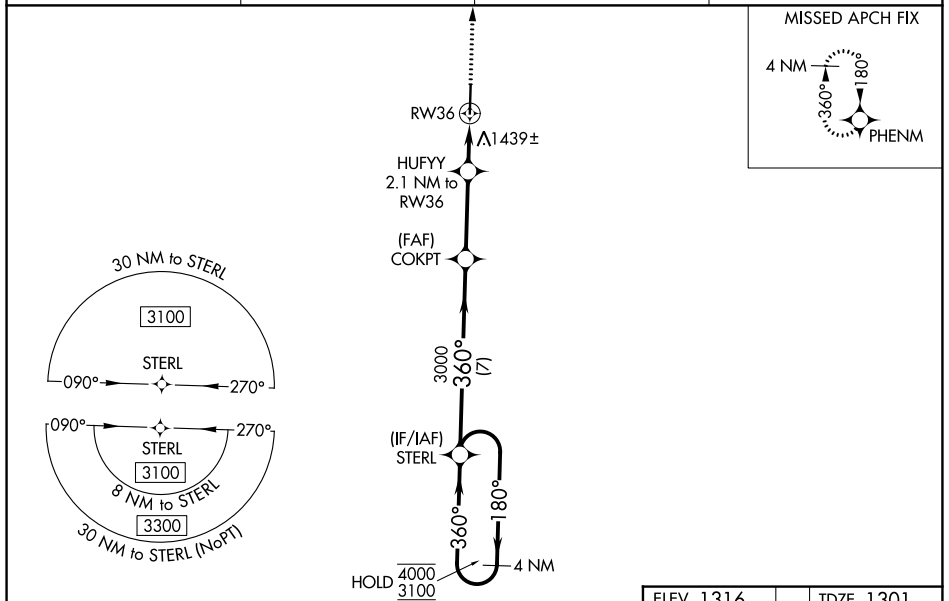

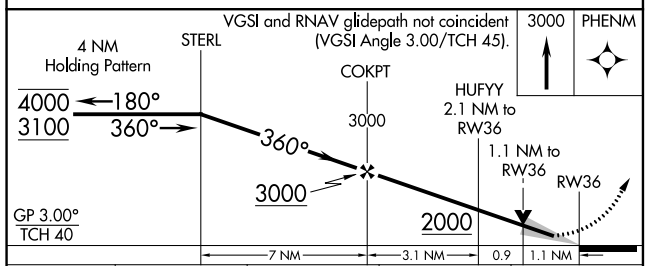


CATEGORY	A	B	C	D
LPV DA	1501-½ 200 (200-½)			
LNAV/VNAV DA	1750-⅞ 449 (500-⅞)			
LNAV MDA	1700-½ 399 (400-½)		1700-⅝ 399 (400-⅝)	
CIRCLING	1760-1 444 (500-1)	1900-1 584 (600-1)	1900-1½ 584 (600-1½)	2060-2½ 744 (800-2½)

ELEV 1316 TDZE 1301

HIRL Rwy 18-36 L

REIL Rwy 18 L

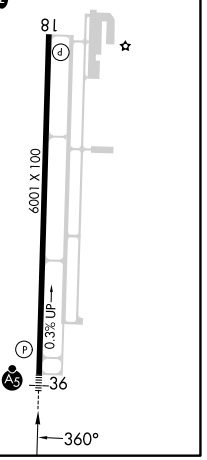

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026