RNAV (GPS) RWY 18

CLAREMORE RGNL (GCM)


WAAS	APP CRS	Rwy Ldg	5200
CH 63214	175°	TDZE	718
W18A		Apt Elev	733


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV Cats A/B visibility to 1⅝ SM.

ODALS


MISSED APPROACH: Climb to 2400 direct DAVLE and hold.

AWOS-3PT	TULSA APP CON	UNICOM
119.925	119.1 360.825	122.7 (CTAF) L

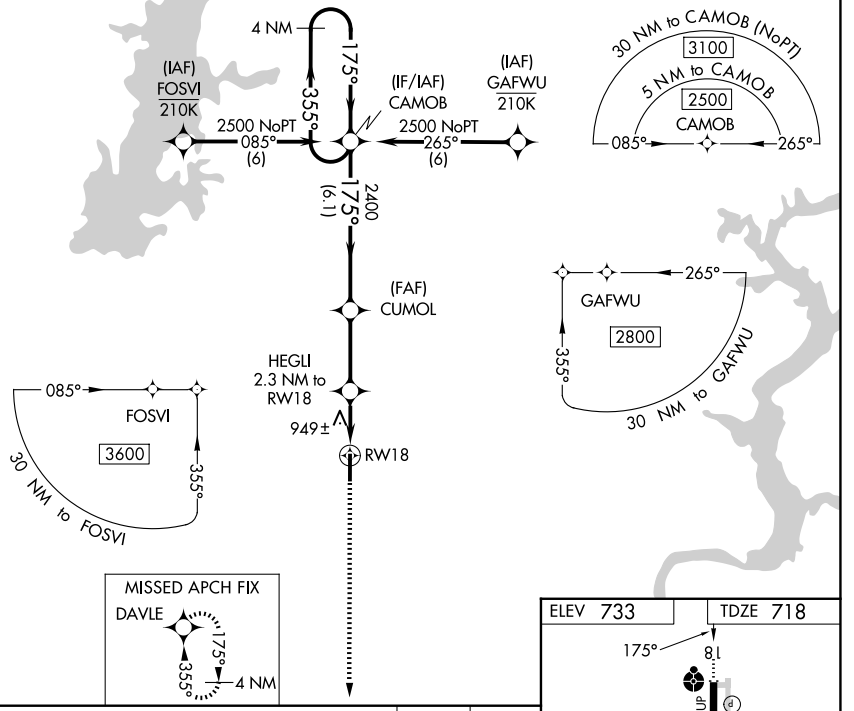

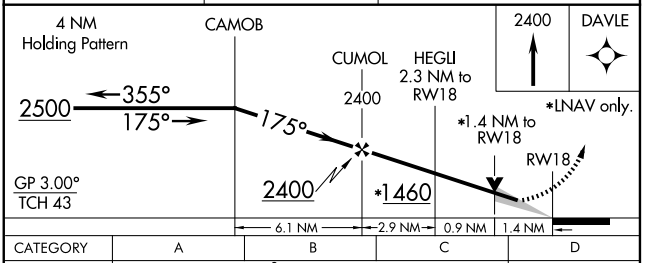

CATEGORY	A	B	C	D
LPV DA	968-¾ 250 (300-¾)			NA
LNAV/VNAV DA	1281-1½ 563 (600-1½)			NA
LNAV MDA	1200-¾ 482 (500-¾)		1200-1¼ 482 (500-1¼)	NA
CIRCLING	1260-1 527 (600-1)		1380-1¾ 647 (700-1¾)	NA

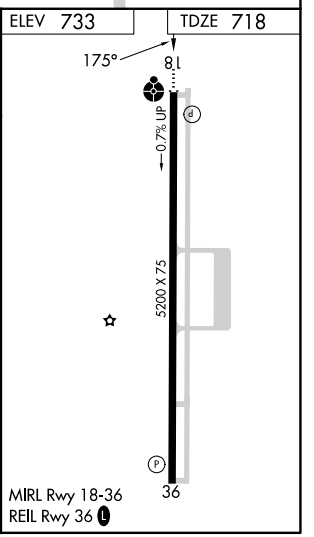

SC-1, 29 OCT 2026 to 26 NOV 2026
SC-1, 29 OCT 2026 to 26 NOV 2026