RNAV (GPS) RWY 24

PONTIAC MUNI (PNT)


WAAS CH 50308 W24A	APP CRS 241°	Rwy Ldg 5000 TDZE 666 Apt Elev 666


RNP APCH - GPS.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using BMI altimeter setting. When local altimeter setting not received, use BMI altimeter setting: increase LPV DA to 1014 feet; increase LNAV/VNAV DA to 1237 feet and all visibilities ¼ SM; increase all MDAs 100 feet and visibility LNAV Cat C ¼ SM and Circling Cat C ½ SM.


MISSED APPROACH: Climb to 3000 direct BUCLA and hold.

AWOS-3	CHICAGO CENTER	UNICOM
119.675	123.75 259.1	123.075 (CTAF) L

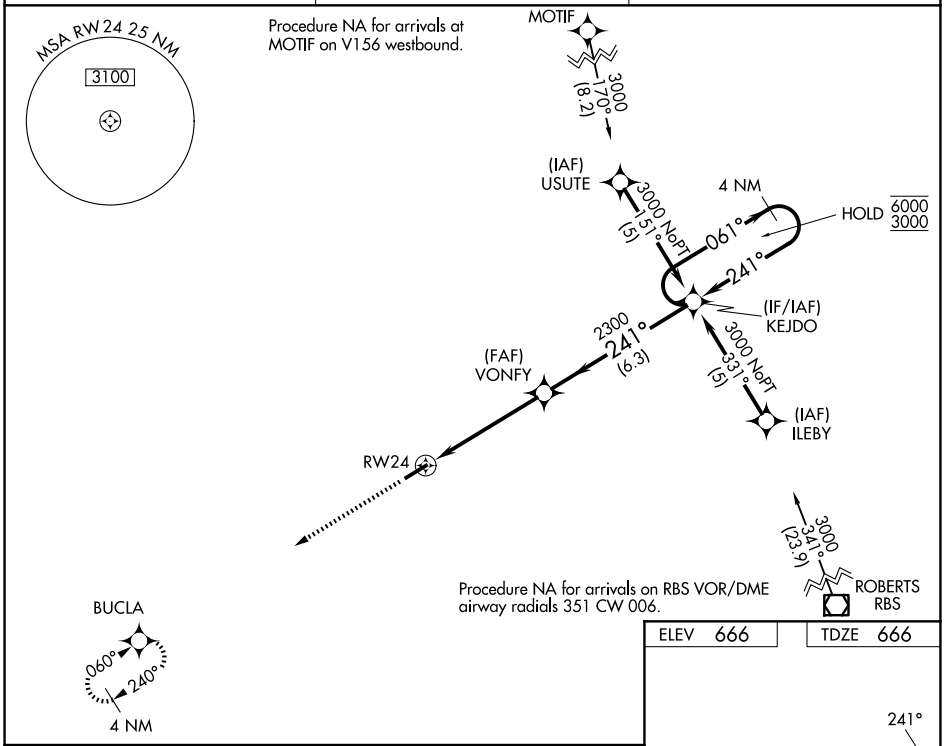

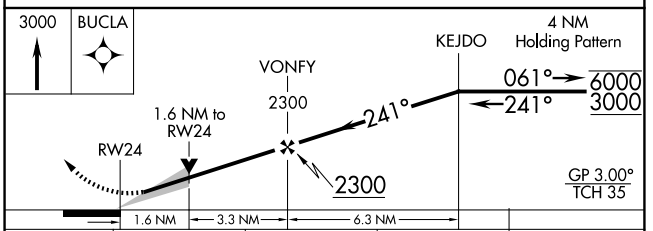

CATEGORY	A	B	C	D
LPV DA	916-1	250 (300-1)		NA
LNAV/VNAV DA	1139-1⅜	473 (500-1⅜)		NA
LNAV MDA	1220-1	554 (600-1)	1220-1⅝ 554 (600-1⅝)	NA
CIRCLING	1220-1	554 (600-1)	1320-1¾ 654 (700-1¾)	NA



EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026