WAAS	APP CRS	Rwy Idg 4500
CH 72714	238°	TDZE 928
W24A		Apt Elev 933

RNAV (GPS) RWY 24


SULLIVAN RGNL (UUV)


Straight-in minimums NA at night. Circling to Rwy 24 NA at night. Baro-VNAV NA when using Rolla Ntl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Rolla Ntl altimeter setting and increase all DA 98 feet and all MDA 100 feet, increase LPV and LNAV/VNAV Cat A and B visibility ¼ mile.

NA


MISSED APPROACH: Climb to 3000 direct WINIL and hold.

AWOS-3PT	KANSAS CITY CENTER	UNICOM
119.375	128.35 284.675	122.7 (CTAF) L

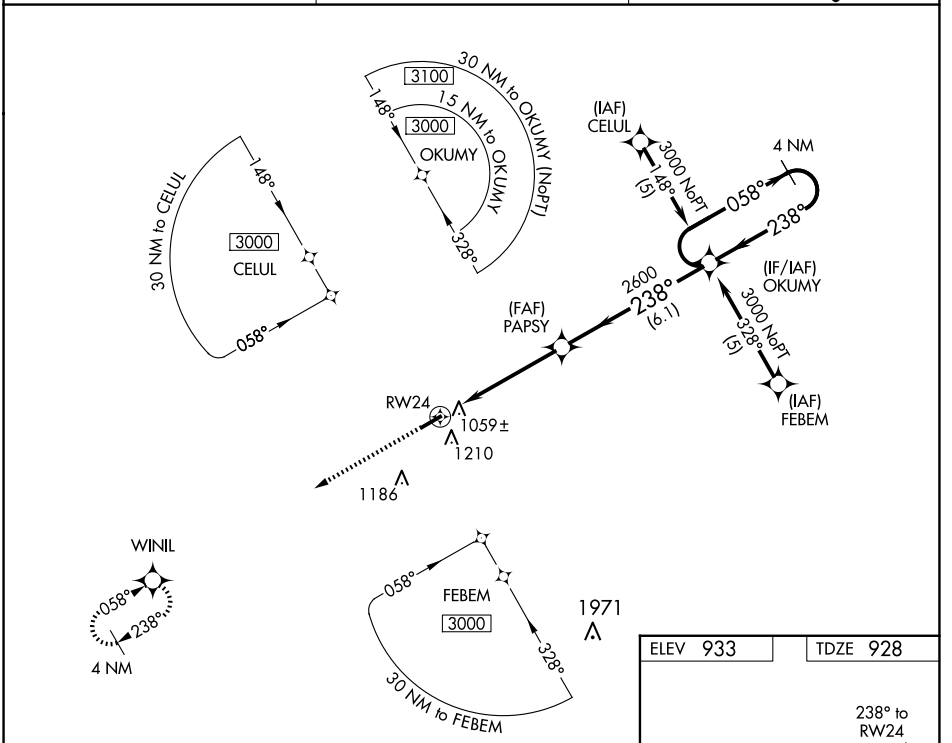

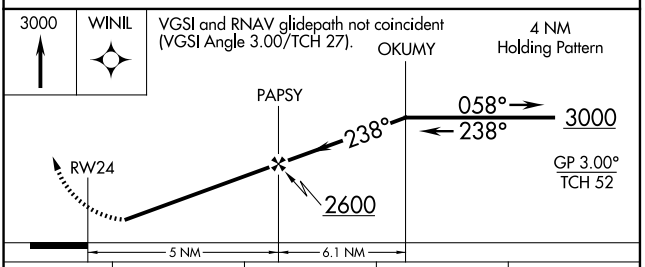

CATEGORY	A	B	C	D
LPV DA	1178-1	250 (300-1)	NA	
LNAV/VNAV DA	1392-1¾	464 (500-1¾)	NA	
LNAV MDA	1460-1	532 (600-1)	NA	
CIRCLING	1520-1	587 (600-1)	NA	

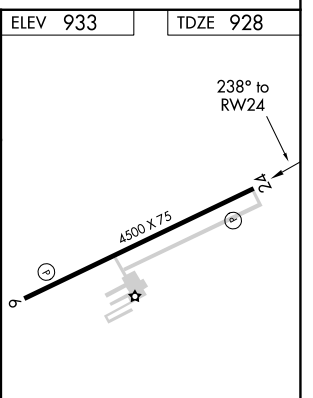

MIRL Rwy 6-24 L

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026