RNAV (GPS) RWY 23

MARION COUNTY (X35)


WAAS CH 48828 W23A	APP CRS 230°	Rwy Idg 5000 TDZE 65 Apt Elev 65


RNP APCH - GPS.


NA Rwy 23 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA. Use Ocala altimeter setting; when not received, use Leesburg altimeter setting and increase LPV DA to 424 feet; increase LNAV/VNAV DA to 579 feet; increase all MDAs 60 feet and LNAV visibility Cat C/D 1⅛ SM, and Circling visibility Cat D ¼ SM. Circling Rwy 5, 10, 28 NA at night.

MISSED APPROACH: Climb to 3000 direct ALICS and hold, continue climb-in-hold to 3000.

OCF AWOS-3PT	JACKSONVILLE APP CON	UNICOM
128.125	118.6 251.15	122.8 (CTAF) L

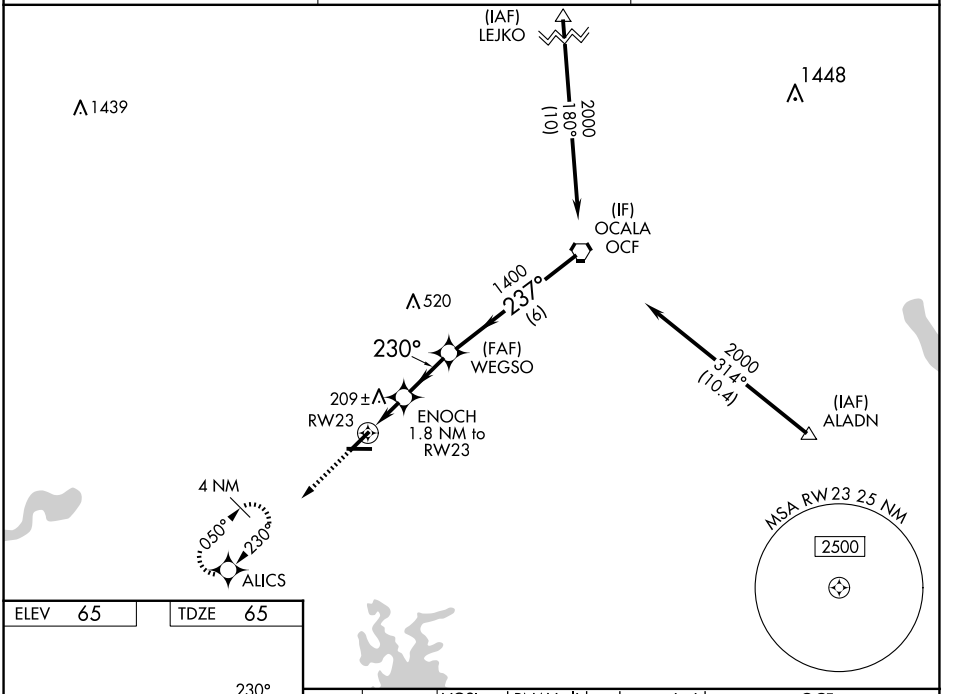



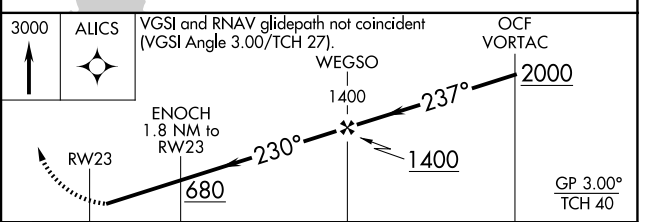

CATEGORY	A	B	C	D
LPV DA	374-1	309 (400-1)		
LNAV/VNAV DA	529-1⅜	464 (500-1⅜)		
LNAV MDA	540-1	475 (500-1)	540-1⅜	475 (500-1⅜)
CIRCLING	540-1	475 (500-1)	580-1½ 515 (600-1½)	760-2¼ 695 (700-2¼)

MIRL Rwy 5-23 and 10-28 L

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026