WAAS	APP CRS	Rwy Ldg	5000
CH 93723	008°	TDZE	436
W01A		Apt Elev	436


RNAV (GPS) RWY 1
FAYETTE COUNTY (FYE)

RNP APCH - GPS.


Baro-VNAV and VDP NA when using Frederick W Smith Intl altimeter setting. Rwy 1 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Frederick W Smith Intl altimeter setting: increase LPV DA to 843 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 905 feet and all visibilities ¼ SM; increase all MDA 100 feet and visibility LNAV Cat C ¼ SM and Circling Cat C ½ SM.


MISSED APPROACH: Climb to 3000 direct RSTEE and hold.

AWOS-3	MEMPHIS APP CON	CTAF
119.875	125.8 338.3	122.9

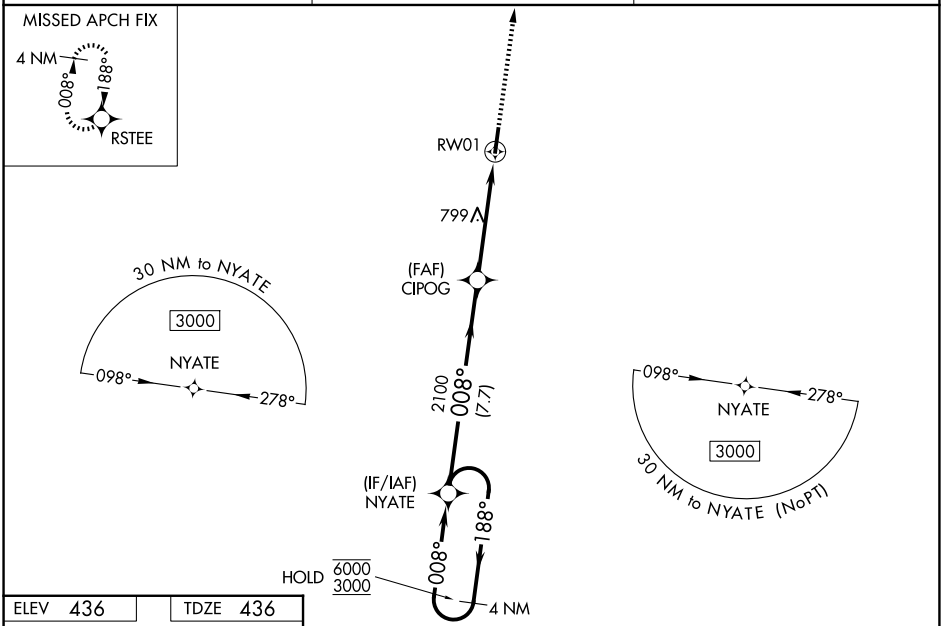

ELEV 436 TDZE 436

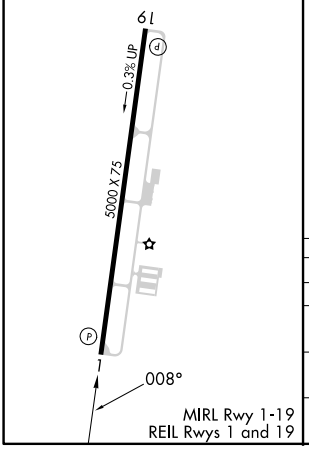

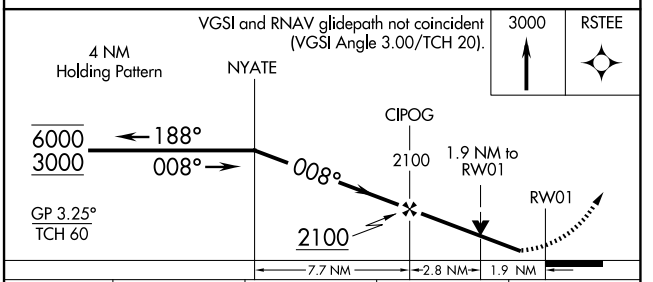

CATEGORY	A	B	C	D
LPV DA	747-1	311 (400-1)		NA
LNAV/VNAV DA	809-1⅛	373 (400-1⅛)		NA
LNAV MDA	1060-1	624 (700-1)	1060-1¾ 624 (700-1¾)	NA
CIRCLING	1060-1	624 (700-1)	1160-2 724 (800-2)	NA

SE-1, 29 OCT 2026 to 26 NOV 2026
SE-1, 29 OCT 2026 to 26 NOV 2026