WAAS	APP CRS	Rwy Ldg	5000
CH 53624	188°	TDZE	431
W19A		Apt Elev	436


RNAV (GPS) RWY 19
FAYETTE COUNTY (FYE)


RNP APCH - GPS.


Baro-VNAV and VDP NA when using Frederick W Smith Intl altimeter setting. Rwy 19 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Frederick W Smith Intl altimeter setting: increase LPV DA to 817 feet and all visibilities ⅛ SM, increase LNAV/VNAV DA to 779 feet; increase all MDA 100 feet and visibility LNAV Cat C ⅝ SM and Circling Cat C ½ SM.


MISSED APPROACH: Climb to 3000 direct NYATE and hold.

AWOS-3	MEMPHIS APP CON	CTAF
119.875	125.8 338.3	122.9




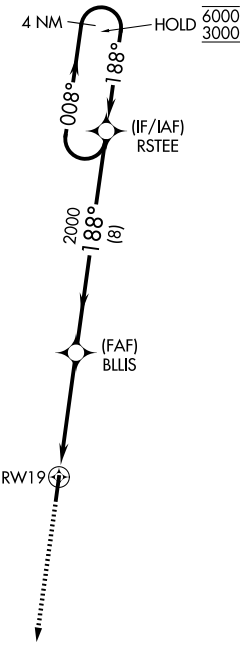



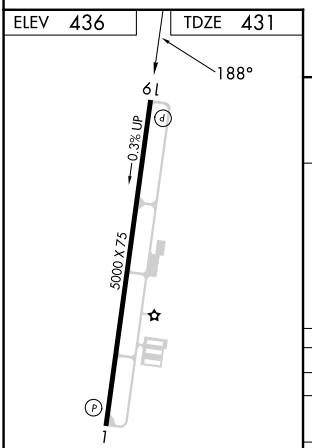

MIRL Rwy 1-19
REIL Rwys 1 and 19

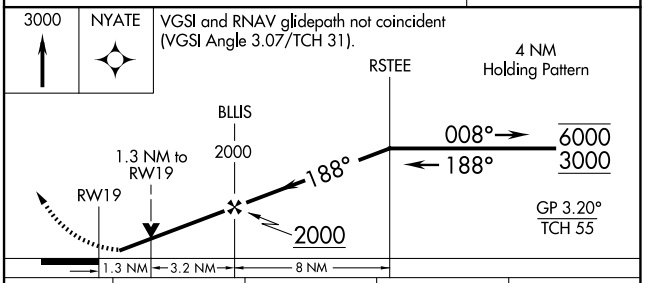

CATEGORY	A	B	C	D
LPV DA	721-1	290 (300-1)		NA
LNAV/VNAV DA	683-1	252 (300-1)		NA
LNAV MDA	880-1 449 (500-1)		880-1⅜ 449 (500-1⅜)	NA
CIRCLING	900-1 464 (500-1)	920-1 484 (500-1)	1160-2 724 (800-2)	NA

SE-1, 29 OCT 2026 to 26 NOV 2026
SE-1, 29 OCT 2026 to 26 NOV 2026