RNAV (GPS) RWY 3

GEORGETOWN-SCOTT COUNTY RGNL (27K)


WAAS	APP CRS	Rwy Ldg	5498
CH 56309	029°	TDZE	940
W03A		Apt Elev	948


RNP APCH - GPS.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using LEX altimeter setting. When local altimeter setting not received, use LEX altimeter setting: increase LPV DA to 1178 feet; increase LNAV/VNAV DA to 1358 feet and all visibilities ⅛ SM: increase all MDAs 40 feet and LNAV visibility Cat C/D ⅛ SM, and Circling visibility Cat D ¼ SM


MISSED APPROACH: Climb to 3000 direct ETOXY and left turn on track 281° to GENUS and hold, continue climb-in-hold to 3000.

AWOS-3	LEXINGTON APP CON	CLNC DEL	UNICOM
119.975	120.15 259.3 (040°-220°) 120.75 298.9 (221°-039°)	127.425	123.0 (CTAF) L

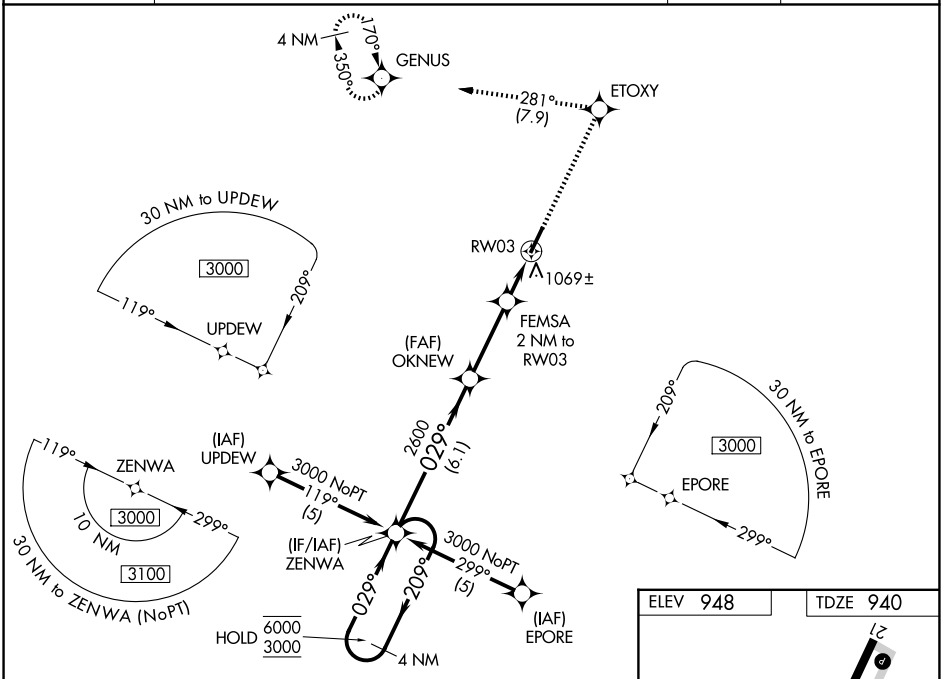

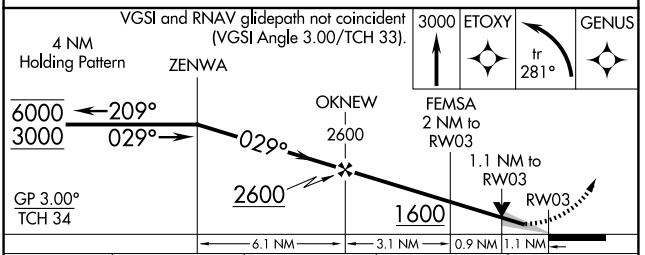

CATEGORY	A	B	C	D
LPV DA		1140-¾	200 (200-¾)	
LNAV/ VNAV DA		1320-1	380 (400-1)	
LNAV MDA		1320-1	380 (400-1)	
CIRCLING	1420-1 472 (500-1)		1560-1¾ 612 (700-1¾)	1660-2¼ 712 (800-2¼)

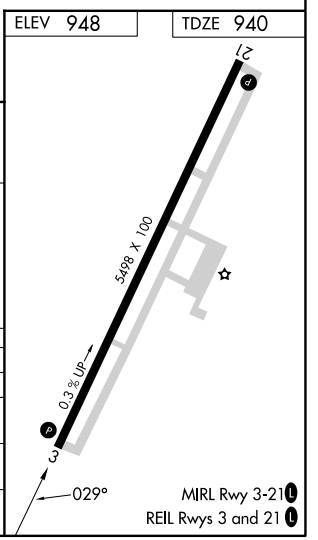

SE-1, 29 OCT 2026 to 26 NOV 2026
SE-1, 29 OCT 2026 to 26 NOV 2026