RNAV (GPS) RWY 18

RUSTON RGNL (RSN)


WAAS	APP CRS	Rwy Ldg	6002
CH 87121	177°	TDZE	297
W18A		Apt Elev	317

RNP APCH - GPS.

Baro-VNAV NA when using Monroe altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 42°C. Rwy 18 helicopter visibility reduction below ¾ SM NA. VDP NA with Monroe altimeter setting. When local altimeter setting not received, use Monroe altimeter setting and increase all DA 97 feet and all MDA 100 feet, increase LPV and LNAV/VNAV all Cats visibility ¼ SM, and Circling Cat C and D visibility ½ SM.

MISSED APPROACH: Climb to 2200 direct SEDAC and hold.

AWOS-3PT	MONROE APP CON ★	CLNC DEL	UNICOM
119.525	126.9 307.9	118.8	122.7 (CTAF) L

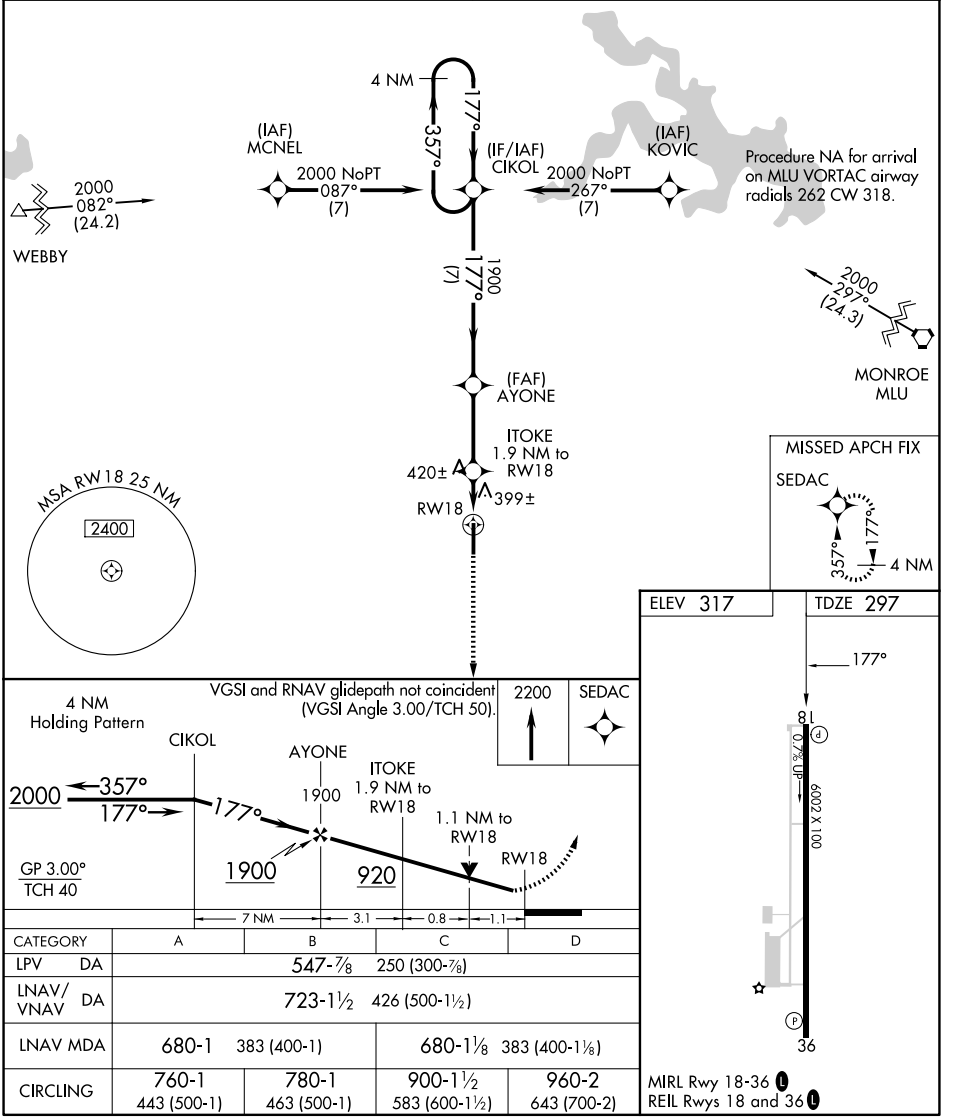

CATEGORY	A	B	C	D
LPV DA	547-⅞	250 (300-⅞)		
LNAV/VNAV DA	723-1½	426 (500-1½)		
LNAV MDA	680-1	383 (400-1)	680-1⅛	383 (400-1⅛)
CIRCLING	760-1 443 (500-1)	780-1 463 (500-1)	900-1½ 583 (600-1½)	960-2 643 (700-2)

MIRL Rwy 18-36 L
REIL Rwys 18 and 36 L

SC-4, 29 OCT 2026 to 26 NOV 2026

SC-4, 29 OCT 2026 to 26 NOV 2026