RNAV (GPS) RWY 21

OHIO COUNTY (JQD)


WAAS CH 90526 W21A	APP CRS 207°	Rwy Ldg 5003 / TDZE 537 / Apt Elev 537


RNP APCH - GPS.


Baro-VNAV NA when using Owensboro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Owensboro altimeter setting and increase LPV DA to 858 feet, increase LNAV/VNAV DA to 1082 feet. Increase all MDA 80 feet, increase LNAV/VNAV visibilities all Cats ¼ SM, increase LNAV and Circling Cat C visibility ¼ SM. Rwy 21 helicopter visibility reduction below 1 SM NA. Procedure NA at night.

MISSED APPROACH: Climb to 3000 direct VUSWO and on track 273° to CCT DME and hold.

AWOS-3PT	EVANSVILLE APP CON ★	UNICOM
132.1	124.025 290.9	122.8 (CTAF) L

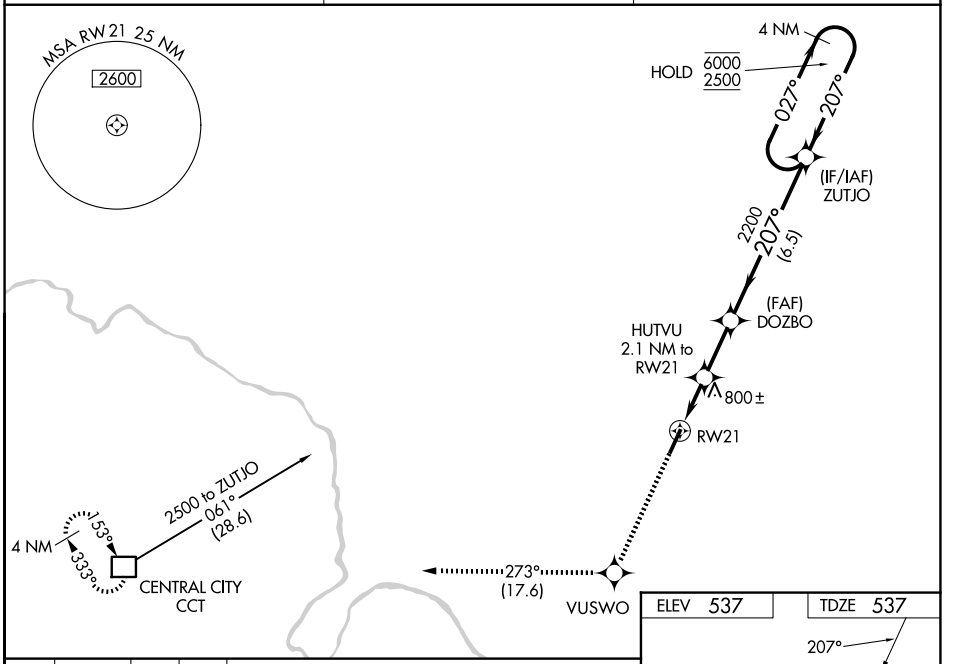

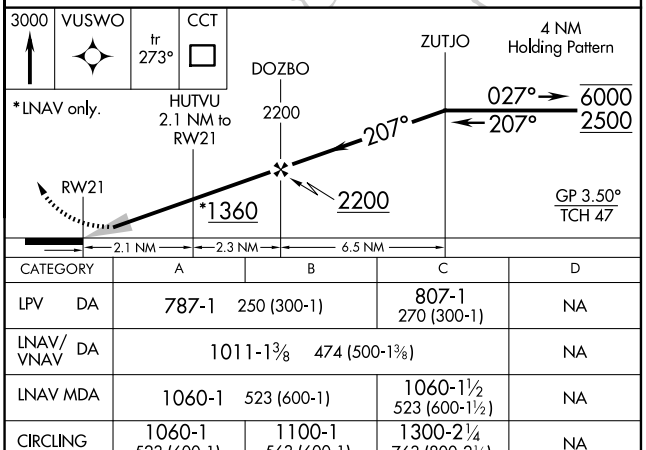

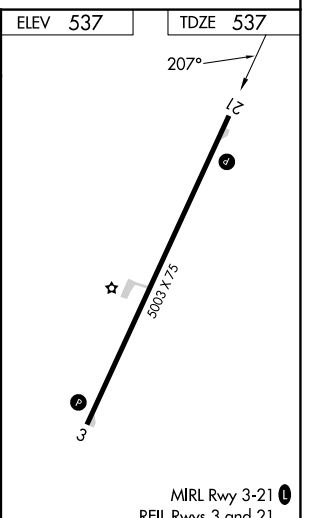

CATEGORY	A	B	C	D
LPV DA	787-1 250 (300-1)		807-1 270 (300-1)	NA
LNAV/VNAV DA	1011-1⅜ 474 (500-1⅜)			NA
LNAV MDA	1060-1 523 (600-1)		1060-1½ 523 (600-1½)	NA
CIRCLING	1060-1 523 (600-1)	1100-1 563 (600-1)	1300-2¼ 763 (800-2¼)	NA

MIRL Rwy 3-21 L
REIL Rwys 3 and 21

SE-1, 29 OCT 2026 to 26 NOV 2026
SE-1, 29 OCT 2026 to 26 NOV 2026