WAAS	APP CRS	Rwy Ldg	7001
CH 53344	213°	TDZE	5758
W21A		Apt Elev	5823


RNAV (GPS) RWY 21
TAYLOR (TYL)

RNP APCH-GPS.


T When local altimeter setting not received, procedure NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 26°C or above 54°C.

MISSED APPROACH: Climb to 6300 then climbing right turn to 8000 direct CAMBA and hold.


AWOS-3PT	ALBUQUERQUE CENTER	UNICOM
119.075	132.9 239.05	122.7 (CTAF) L

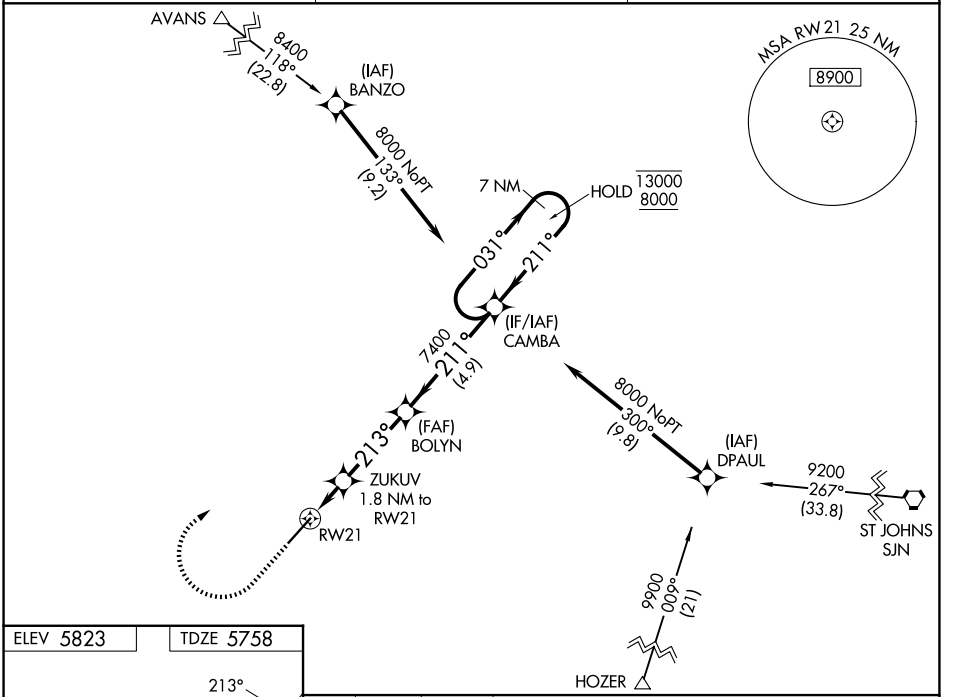

ELEV 5823 TDZE 5758

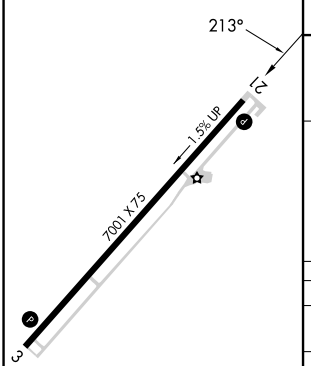

MIRL Rwy 3-21 L
REIL Rwys 3 and 21 L

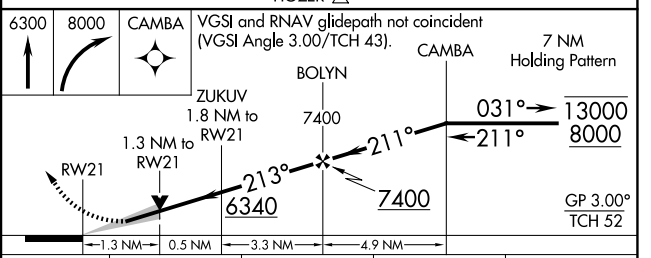

CATEGORY	A	B	C	D
LPV DA	6008-¾ 250 (200-¾)			
LNAV/VNAV DA	6008-¾ 250 (200-¾)			
LNAV MDA	6180-1 422 (400-1)		6180-1¼ 422 (400-1¼)	
CIRCLING	6320-1 497 (500-1)	6440-1 617 (700-1)	6440-1¾ 617 (700-1¾)	6480-2 657 (700-2)

SW-4, 29 OCT 2026 to 26 NOV 2026
SW-4, 29 OCT 2026 to 26 NOV 2026