RNAV (GPS) RWY 28

STANLEY MUNI (Ø8D)


WAAS CH 86248 W28A	APP CRS 282°	Rwy Ldg 3900 TDZE 2242 Apt Elev 2250

RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Rwy 28 helicopter visibility reduction below ¾ SM NA.


MISSED APPROACH: Climb to 5000 direct EWXUR and hold, continue climb-in-hold to 5000.

AWOS-3	MINNEAPOLIS CENTER	CTAF
121.1	127.6 279.6	122.9 (L)

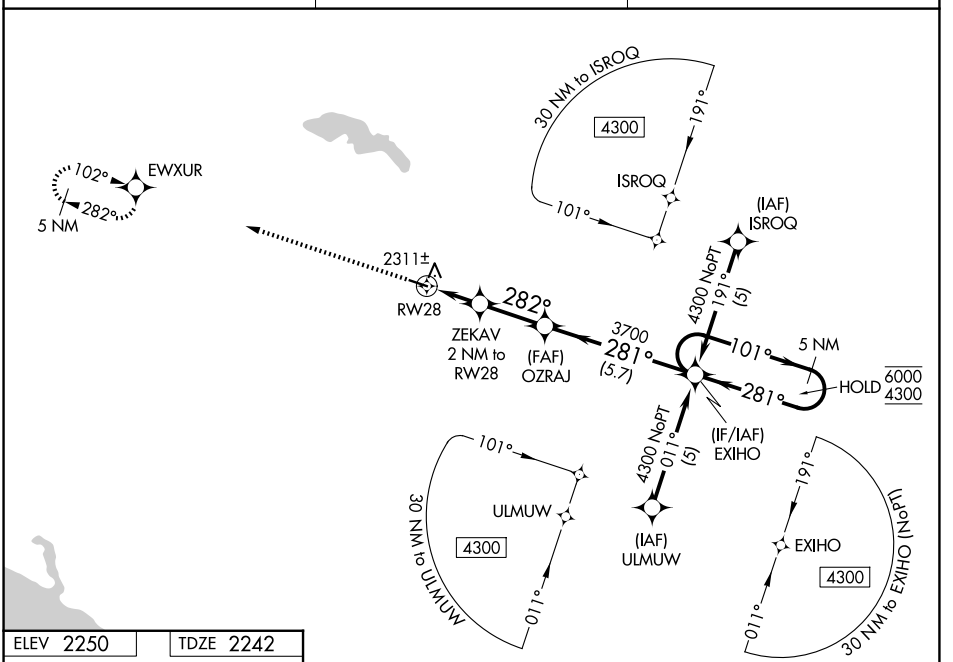

ELEV 2250 TDZE 2242



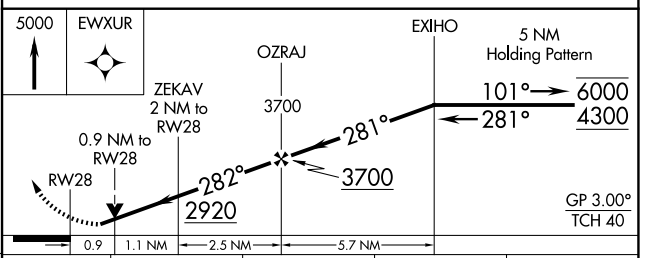

CATEGORY	A	B	C	D
LPV DA	2492-1 250 (300-1)		NA	
LNAV/VNAV DA	2492-1 250 (300-1)		NA	
LNAV MDA	2580-1 338 (400-1)		NA	
CIRCLING	2720-1 470 (500-1)	2940-1 690 (700-1)	NA	

MIRL Rwy 10-28 (L)

NC-1, 29 OCT 2026 to 26 NOV 2026
NC-1, 29 OCT 2026 to 26 NOV 2026