WAAS	APP CRS	Rwy Ldg	4712
CH 86831	266°	TDZE	6037
W27A		Apt Elev	6056


RNAV (GPS) RWY 27


SPANISH PEAKS AIRFIELD (4V1)

NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Trinidad altimeter setting and increase all DA 119 feet and all MDA 120 feet; increase LPV all Cats visibility ¼ mile, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ⅜ mile. Baro-VNAV and VDP NA when using Trinidad altimeter setting.


MISSED APPROACH: Climb to 6800 then climbing right turn to 9400 direct JUKEX and hold.

AWOS-3PT	DENVER CENTER	UNICOM
123.6	128.375 379.95	122.8 (CTAF) L

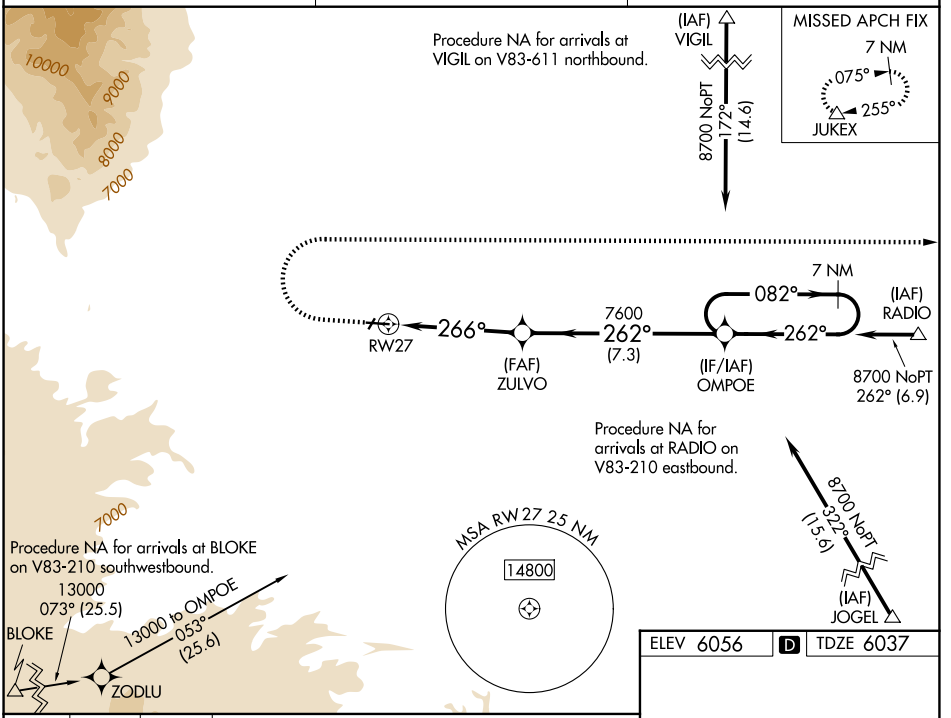

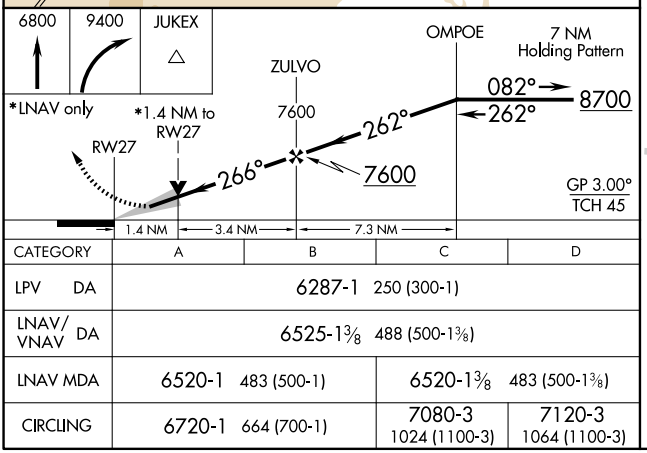

CATEGORY	A	B	C	D
LPV DA	6287-1 250 (300-1)			
LNAV/VNAV DA	6525-1⅜ 488 (500-1⅜)			
LNAV MDA	6520-1 483 (500-1)		6520-1⅜ 483 (500-1⅜)	
CIRCLING	6720-1 664 (700-1)		7080-3 1024 (1100-3)	7120-3 1064 (1100-3)



SW-1, 29 OCT 2026 to 26 NOV 2026
SW-1, 29 OCT 2026 to 26 NOV 2026