RNAV (GPS) RWY 16

RONAN (7SØ)


WAAS CH 45814 W16A	APP CRS 165°	Rwy Ldg 4798 TDZE 3086 Apt Elev 3086


RNP APCH.

T A NA Baro-VNAV NA when using Missoula altimeter setting. For uncompensated Baro-VNAV systems, procedure NA below -21°C or above 54°C. Circling NA east of Rwy 16-34. When local altimeter setting not received, use Missoula altimeter setting: increase LPV DA to 3550 and LNAV/VNAV DA to 3639 and all visibilities ¼ SM; increase all MDAs 120 feet and LNAV Cat B and Circling Cats A and B visibility ¼ SM.


MISSED APPROACH: Climb to 13000 direct IBBOR and on track 255° to HANIM and hold, continue climb-in-hold to 13000.

AWOS-3	SALT LAKE CITY CENTER	AUNICOM
119.925	127.075 244.875	122.8 (CTAF) L

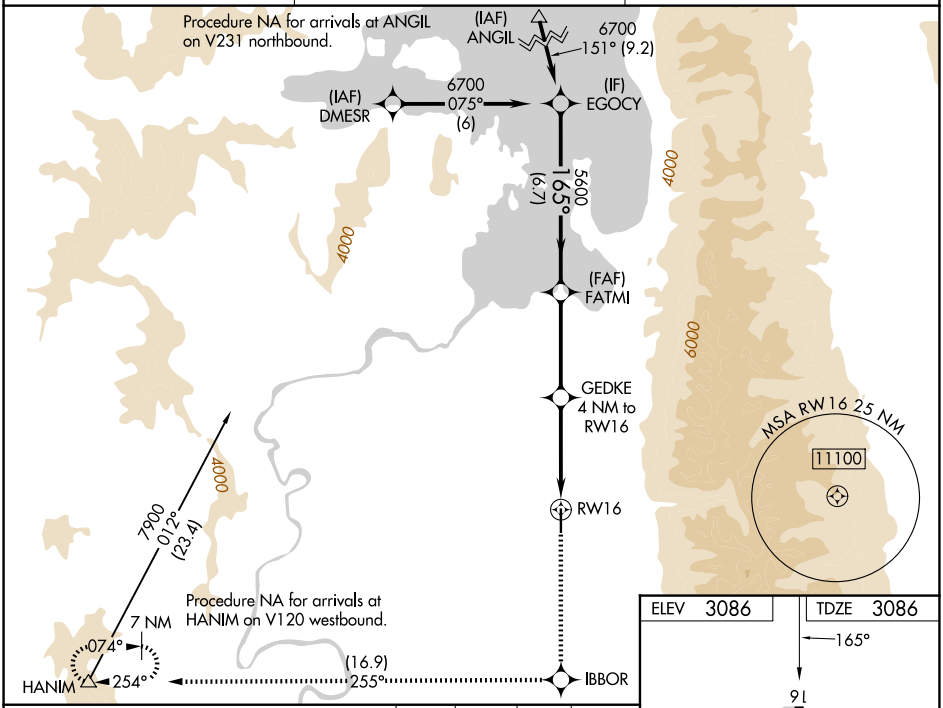

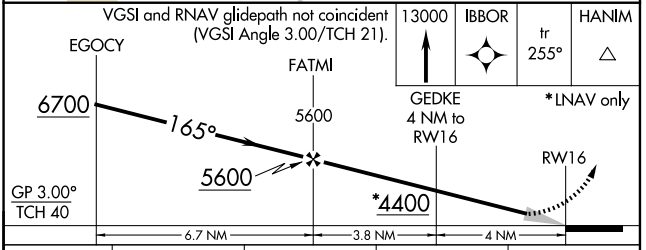

CATEGORY	A	B	C	D
LPV DA	3443-1¼	357 (400-1¼)	NA	
LNAV/VNAV DA	3532-1⅜	446 (500-1⅜)	NA	
LNAV MDA	3800-1	714 (800-1)	NA	
CIRCLING	3800-1	714 (800-1)	NA	

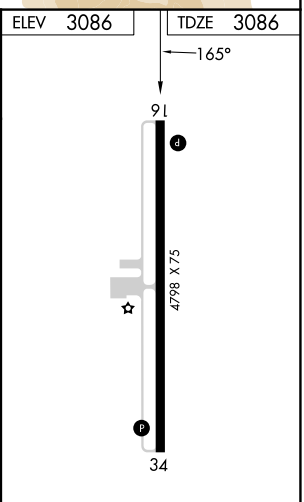

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026