RNAV (GPS) RWY 17


MOUNT PLEASANT RGNL (OSA)


APP CRS	Rwy Ldg	6004
168°	TDZE	364
	Apt Elev	364

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Paris altimeter setting and increase all DA/MDA 120 feet, increase LNAV/VNAV visibilities ¼ mile all Cats, LNAV visibilities ½ mile all Cats, and circling visibilities ½ mile all Cats. VDP and Baro-VNAV NA when using Paris altimeter setting.


MISSED APPROACH: Climb to 2100 direct JAVOT and hold.

AWOS-3	FORT WORTH CENTER	UNICOM
119.775	132.025 317.75	122.7 (CTAF) L

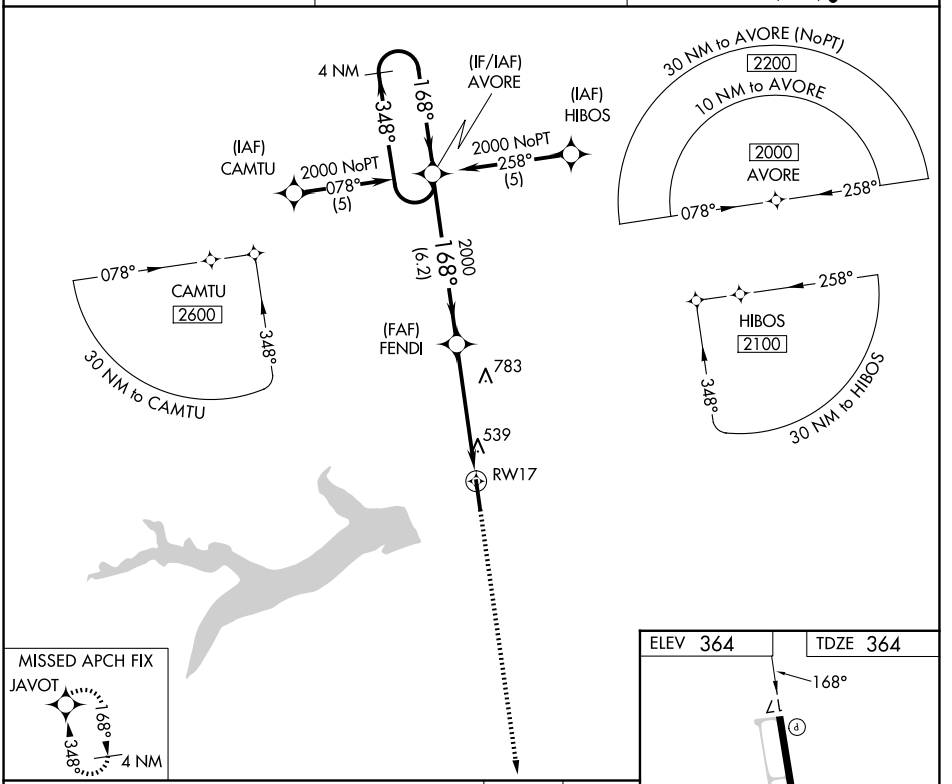

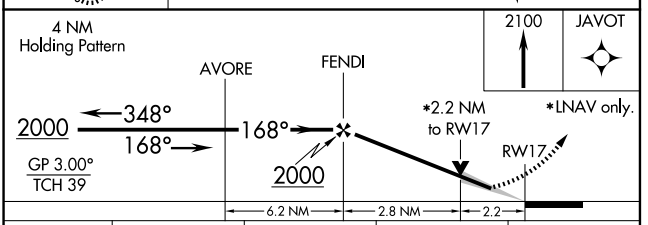

CATEGORY	A	B	C	D
LNAV/VNAV DA	890-2 526 (600-2)			
LNAV MDA	1100-1 736 (800-1)		1100-2 736 (800-2)	1100-2¼ 736 (800-2¼)
CIRCLING	1100-1 736 (800-1)		1100-2 736 (800-2)	1100-2¼ 736 (800-2¼)

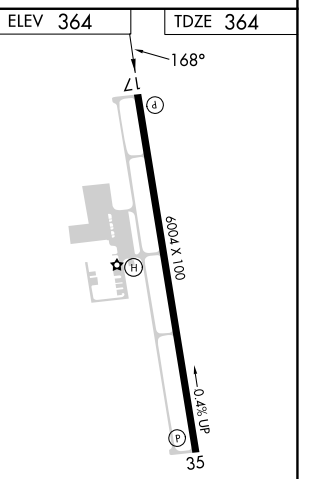

REIL Rwys 17 and 35 L
MIRL Rwy 17-35 L

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026