WAAS CH 42825 W10A	APP CRS 096°	Rwy Idg 3000 / TDZE 7 / Apt Elev 7

RNAV (GPS) RWY 10


MIAMI HOMESTEAD GENERAL AVIATION (X51)


Baro-VNAV NA when using Miami Exec altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Miami Exec altimeter setting: increase LPV DA to 284; increase LNAV/VNAV DA to 284; increase all MDA 40 feet.


NA

MISSED APPROACH: Climb to 500 then climbing left turn to 2000 direct HOLMU and hold.

AWOS-3	MIAMI APP CON	UNICOM
118.375	125.5 354.1	122.8 (CTAF)

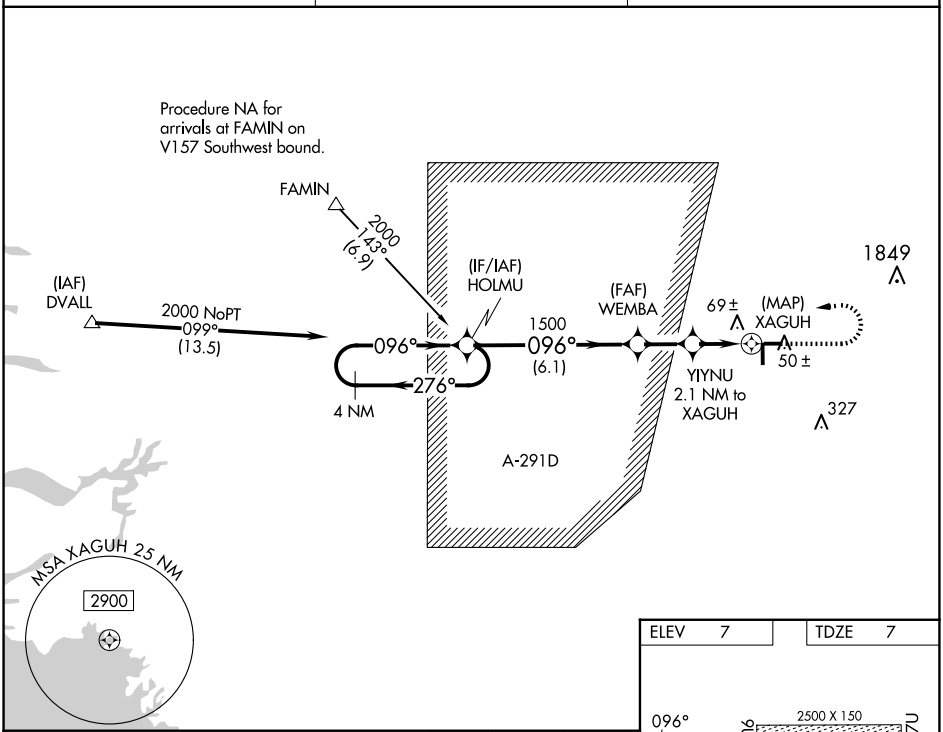

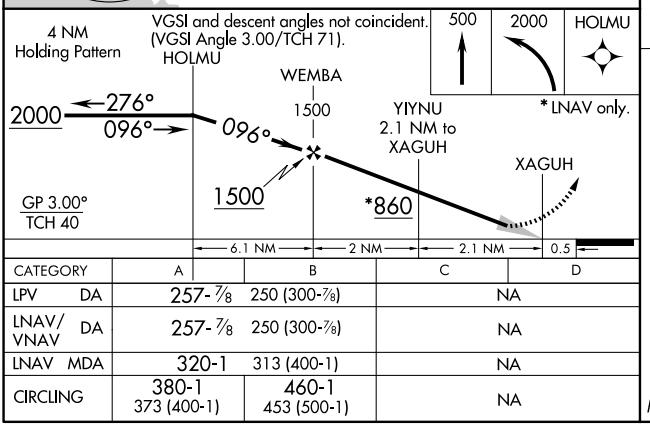

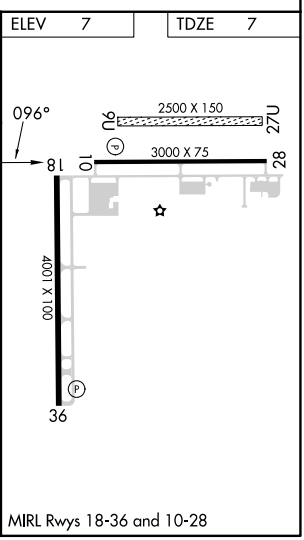

CATEGORY	A	B	C	D
LPV DA	257-⅞	250 (300-⅞)	NA	
LNAV/VNAV DA	257-⅞	250 (300-⅞)	NA	
LNAV MDA	320-1	313 (400-1)	NA	
CIRCLING	380-1 373 (400-1)	460-1 453 (500-1)	NA	

MIRL Rwys 18-36 and 10-28

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026