YODUH TWO DEPARTURE (RNAV)


SAN ANTONIO DEP CON
125.1 307.0

RNAV 1 - DME/DME IRU or GPS.

RADAR required for non-GPS equipped aircraft.
RADAR required.


TOP ALTITUDE: ASSIGNED BY ATC

NOTE: Aircraft destined for airports north/northeast of DFW terminal area must file the KLNGR Transition.

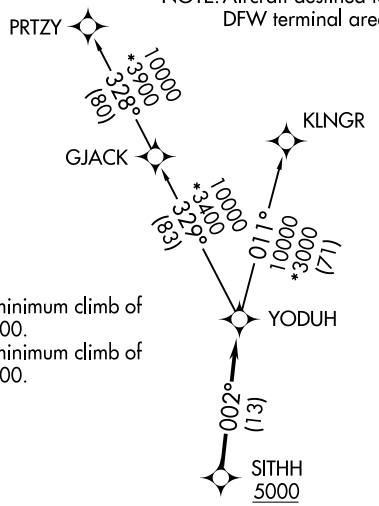

TAKEOFF MINIMUMS
Rwy 17: Standard with minimum climb of 210'/NM to 2200.
Rwy 35: Standard with minimum climb of 250'/NM to 3800.





NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 17: Climb on heading 169° or as assigned by ATC, for vectors to SITHH, thence. . .
TAKEOFF RUNWAY 35: Climb on heading 349° or as assigned by ATC, for vectors to SITHH, thence. . .

. . .on track 002° to YODUH, then on transition. Maintain ATC assigned altitude. Expect filed altitude 10 minutes after departure.

KLNGR TRANSITION (YODUH2.KLNGR)
PRTZY TRANSITION (YODUH2.PRTZY)

SC-3, 29 OCT 2026 to 26 NOV 2026
SC-3, 29 OCT 2026 to 26 NOV 2026