RNAV (GPS) RWY 32

BRANSON (BBG)

WAAS	APP CRS	Rwy Ldg	7140
CH 93911	323°	TDZE	1302
W32A		Apt Elev	1302


RNP APCH.


When local altimeter setting not received, use Harrison altimeter setting: increase LPV DA to 1549 feet; increase LNAV/VNAV DA to 1804 feet and all visibilities ¼ SM; increase all MDAs 60 feet and visibility Cats C and D ½ SM. VDP and Baro-VNAV NA when using Harrison altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). Inop table does not apply.


MALSF

MISSED APPROACH: Climb to 4000 direct WUTIB and hold.

ATIS	SPRINGFIELD APP CON	BRANSON TOWER★	GND CON	UNICOM
124.625	126.35	128.15 (CTAF) L	118.4	122.95

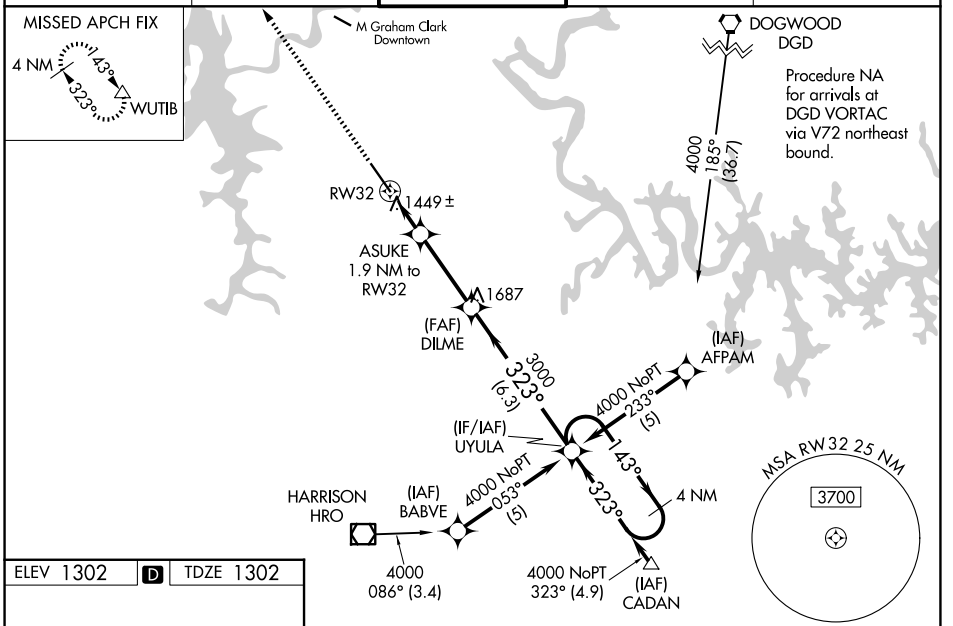

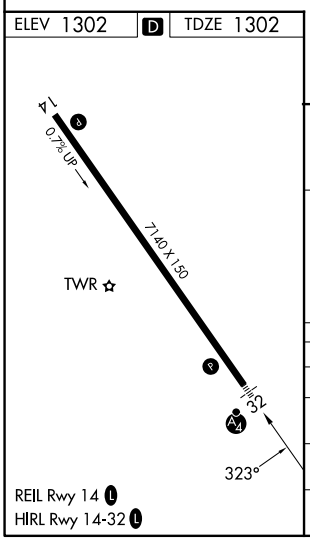

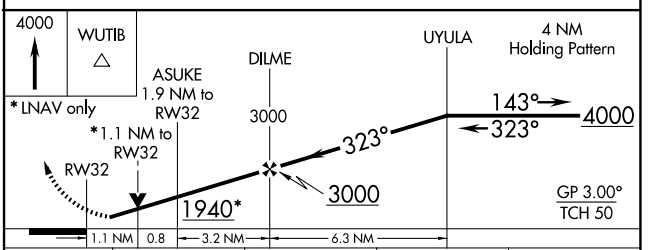

CATEGORY	A	B	C	D
LPV DA	1502-1 200 (200-1)			
LNAV/VNAV DA	1757-1½ 455 (500-1½)			
LNAV MDA	1700-1 398 (400-1)			1700-1¼ 398 (400-1¼)
CIRCLING	1760-1 458 (500-1)	1900-1 598 (600-1)	2220-2¾ 918 (1000-2¾)	2220-3 918 (1000-3)

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026