WAAS	APP CRS	Rwy Ldg	10000
CH 63017	162°	TDZE	69
W16A		Apt Elev	69

RNAV (GPS) RWY 16


NORTHWEST FLORIDA BEACHES INTL (ECP)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Destin altimeter setting and increase all DA 88 feet, increase all MDA 100 feet, and increase LNAV/VNAV all Cats visibility and LNAV Cat C and D visibility ⅜ mile. Baro-VNAV and VDP NA when using Destin altimeter setting. For inop MALSR, increase LNAV Cat C and D visibility to 1 mile. For inop MALSR when using Destin altimeter setting, increase all LPV visibility to ⅞ mile, increase all LNAV/VNAV visibility to 1⅝ mile, and increase LNAV Cat C and D visibility to 1⅜ mile.


MALSR

MISSED APPROACH: Climb to 500 then climbing left turn to 4000 direct SCARE and hold, continue climb-in-hold to 4000.

ATIS	TYNDALL APP CON★	PANAMA CITY TOWER★	GND CON
119.975	125.2	118.95 (CTAF) L	121.65

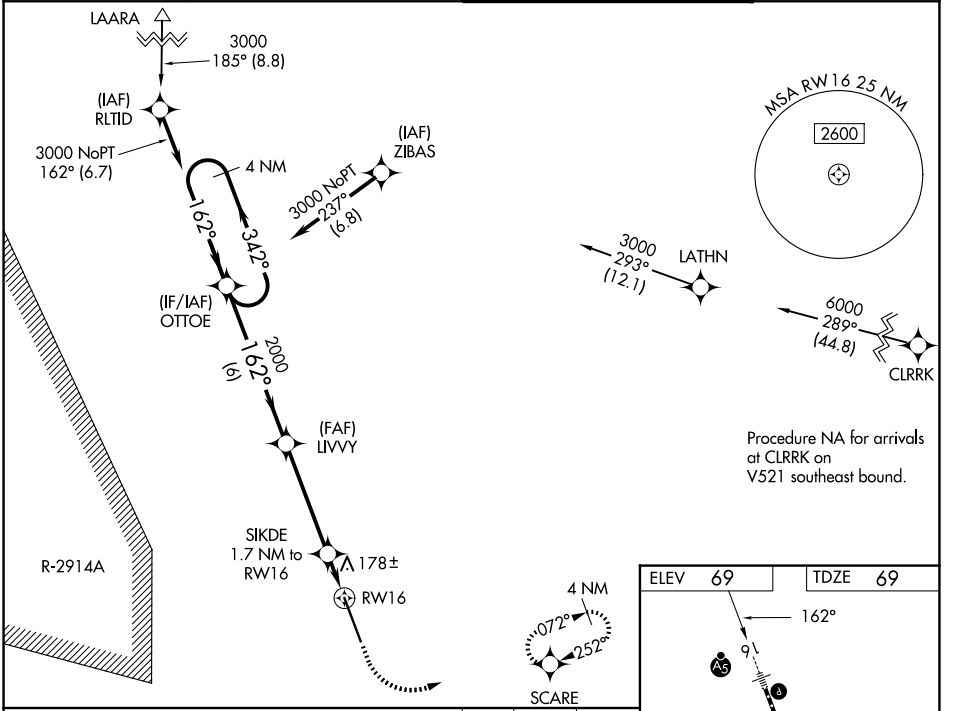

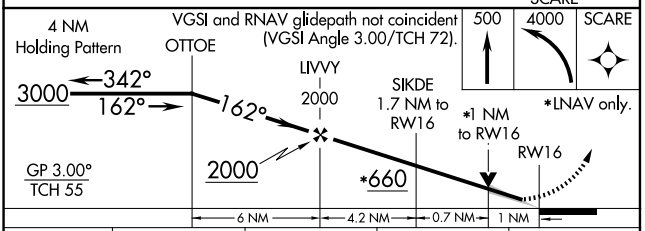

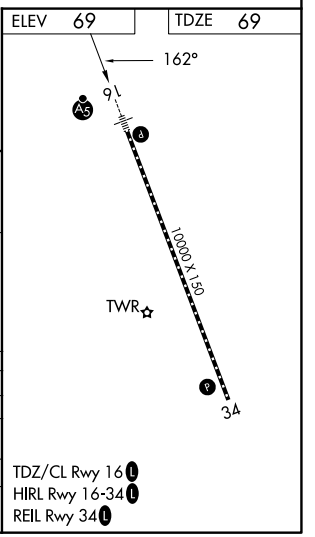

CATEGORY	A	B	C	D
LPV DA	269-½	200 (200-½)		
LNAV/VNAV DA	478-⅞	409 (500-⅞)		
LNAV MDA	440-½	371 (400-½)	440-⅝	371 (400-⅝)
CIRCLING	520-1	451 (500-1)	520-1½	451 (500-1½)
			620-2	551 (600-2)

TDZ/CL Rwy 16 L
HIRL Rwy 16-34 L
REIL Rwy 34 L

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026