RNAV (GPS) RWY 1

GLENDALE RGNL (GEU)


WAAS CH 90306 W01A	APP CRS 014°	Rwy Ldg 6279 TDZE 1049 Apt Elev 1071

RNP APCH.

T A Baro-VNAV NA when using Phoenix Sky Harbor Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 47°C. When local altimeter setting not received, use Phoenix Sky Harbor Intl altimeter setting: increase LPV DA to 1438 feet; increase LNAV/VNAV DA to 1517 feet and all visibilities ¼ SM; increase all MDA 60 feet and LNAV Cat C and D visibility ¼ SM. Night landing: Rwy 1, Cat C and D operational VGSI required, remain on or above VGSI glidepath until threshold. Rwy 1 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 10000 direct BAPPA and on 334° track to GINKE and hold, continue climb-in-hold to 10000.

ATIS	LUKE APP CON ★	GLENDALE TOWER ★	GND CON	UNICOM
119.425	118.15 363.125	121.0 (CTAF) L	118.0	122.95

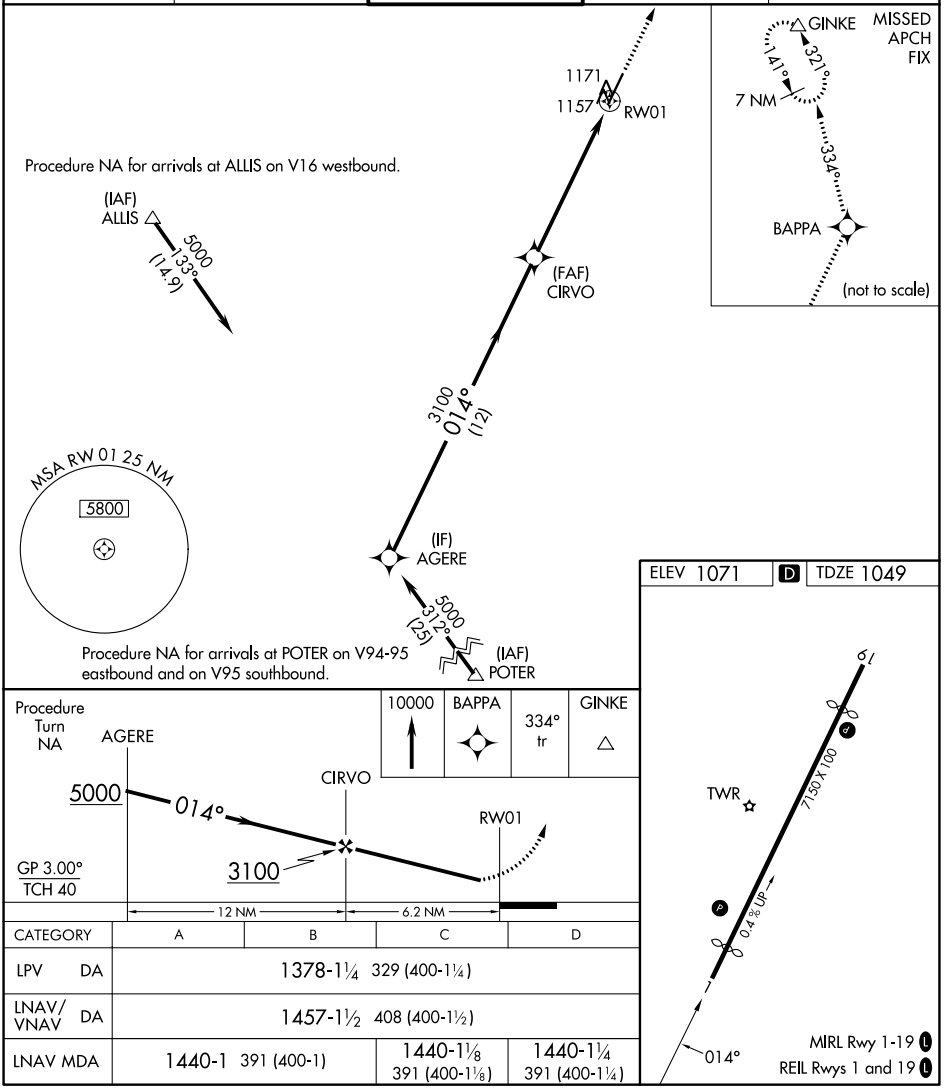

CATEGORY	A	B	C	D
LPV DA	1378-1¼ 329 (400-1¼)			
LNAV/VNAV DA	1457-1½ 408 (400-1½)			
LNAV MDA	1440-1 391 (400-1)		1440-1⅛ 391 (400-1⅛)	1440-1¼ 391 (400-1¼)

SW-4, 26 NOV 2026 to 24 DEC 2026
SW-4, 26 NOV 2026 to 24 DEC 2026