

PITTS TOWN

ALEXANDRIA (N85) 2 W UTC-5(-4DT) N40°35.25' W75°01.17'

480 B NOTAM FILE MIV

RWY 08-26: H2550X60 (ASPH) MIRL 0.7% up E

RWY 08: PAPI(P2R)—GA 4.0° TCH 30'. Tree.

RWY 26: PAPI(P2L)—GA 3.75° TCH 28'. Tree.

RWY 13-31: H1804X100 (ASPH-TURF) 0.8% up SE

RWY 13: Tree.

RWY 31: Tree.

SERVICE: S4 **FUEL** 100LL, JET A **LGT** ACTIVATE MIRL Rwy 08-26 and rotating bc—121.8. Rwy 26 PAPI UNUSBL BYD 2° left of CNTRLN.

AIRPORT REMARKS: Attended 1300Z†-dusk. Fuel 24hr self-svc. Parachute jumping Mar-Nov. Parachute drop zone on north side of arpt. Ctc arpt manager 908-730-9233 prior to conducting helicopter training activity. Helicopter tcf and ldg rstd to Rwy 08-26 only. Helicopters use fixed-wing tcf pat and alts. No touch and go landings or straight in apchs allowed. Rwy 13-31 25' wide asph strip full length down center of rwy. Turf portion of rwy unusable. Taxi on pavement only.

AIRPORT MANAGER: 908-730-9223

COMMUNICATIONS: CTAF/UNICOM 122.975

Ⓡ **ALLETOWN APP/DEP CON** 124.45 (Above 3000') 119.65 (3000' and blo)

CLEARANCE DELIVERY PHONE: For CD ctc Allentown Apch at 800-728-6322.

RADIO AIDS TO NAVIGATION: NOTAM FILE MIV.

SOLBERG (L) VOR/DME 112.9 SBJ Chan 76 N40°34.98' W74°44.51' 281° 12.7 NM to fld. 189/10W.


DME unusable:

167°-040° byd 34 NM

NEW YORK

L-33A, 34H

IAP

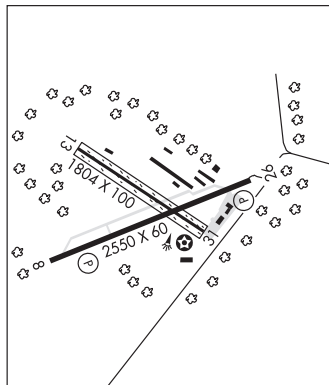

SKY MANOR (N40) 2 SW UTC-5(-4DT) N40°33.95' W74°58.76'

560 NOTAM FILE MIV

RWY 07-25: H2900X50 (ASPH) MIRL 0.3% up NE

RWY 07: REIL. PAPI(P2L)—GA 4.0° TCH 31'. Trees.

RWY 25: REIL. PAPI(P2L)—GA 4.0° TCH 29'. P-line.

SERVICE: S4 **FUEL** 100LL **LGT** ACTVT REIL Rwy 07 and Rwy 25, PAPI Rwy 07 and Rwy 25, MIRL Rwy 07-25 and twy lghts—CTAF. Rwy 07 VGS1 and descent angles not coincident. Unusbl byd 4.0° rgt of centerline. REIL Rwy 25 OTS.

AIRPORT REMARKS: Attended continuously. Self-serve fuel system on north end of tie-down ramp. Helicopter activity on and invof arpt. Deer and birds on and invof arpt. Apn main ramp clsd to hel air tax and hover ops near fuel pump. Rwy 07 noise abatement procedures VFR dep fly rwy heading until reaching at least 1,300 ft MSL. Rwy 25 noise abatement procedures VFR dep safety premitting at dep end of rwy turn right fly heading 270 until reaching at least 1,300 ft MSL. Avoid overflight of horse farm (stables) 500' north of acft hangars.

AIRPORT MANAGER: 908-996-4200

WEATHER DATA SOURCES: AWOS-3 121.725.

COMMUNICATIONS: CTAF/UNICOM 122.975

Ⓡ **ALLETOWN APP/DEP CON** 124.45 (Above 3000') 119.65 (3000' and blo)

CLEARANCE DELIVERY PHONE: For CD ctc Allentown Apch at 800-728-6322.

RADIO AIDS TO NAVIGATION: NOTAM FILE MIV.

SOLBERG (L) VOR/DME 112.9 SBJ Chan 76 N40°34.98' W74°44.51' 275° 10.9 NM to fld. 189/10W.

DME unusable:

167°-040° byd 34 NM

NEW YORK

L-33A, 34H

IAP

