

FLYING CROWN (AK12) PVT 6 S UTC-9(-8DT) N61°06.40' W149°51.86'

ANCHORAGE

150 NOTAM FILE Not insp.

RWY 13-31: 1078X50 (TURF)

RWY 13: Thld dsplcd 30'. Trees.

RWY 31: Thld dsplcd 798'. Trees. Rgt tfc.

AIRPORT REMARKS: Unattended. Rwy conditions unmonitored, visual inspection recommended prior to use. Watch for pedestrians. Multiple sprinkler and equipment on or near rwy. And hill near end of rwys not maintained in winter. Railroad runs parallel to rwy, frequent train traffic. Operations not recommended during train traffic.

AIRPORT MANAGER: 907-245-1932

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE ANC.

ANCHORAGE (H) VOR/DME 113.15 TED Chan 78(Y) N61°10.07' W149°57.61' 125° 4.6 NM to fld. 93/18E.

VOR unusable:

041°-091° byd 25 NM blo 15,000'

091°-096° byd 20 NM blo 15,000'

096°-121° byd 25 NM blo 12,500'

121°-146° byd 25 NM blo 9,000'

DME unusable:

041°-091° byd 25 NM blo 15,000'

091°-096° byd 20 NM blo 15,000'

096°-121° byd 25 NM blo 12,500'


121°-146° byd 25 NM blo 9,000'

196°-206° byd 25 NM blo 3,500'

206°-211° byd 25 NM blo 4,000'

211°-221° byd 25 NM blo 3,500'

COMM/NAV/WEATHER REMARKS: For a toll free call to Kenai FSS dial 1-866-864-1737.



LAKE HOOD (LHD)(PALH) P (ANG) 3 SW UTC-9(-8DT) N61°11.20' W149°57.92'

ANCHORAGE

79 TPA-679(600) NOTAM FILE LHD

RWY 14-32: 2200X75 (GRVL-DIRT) MIRL

RWY 14: Tree.

RWY 32: Tree. Rgt tfc.

SERVICE: S4 FUEL 100, 100LL, JET A LGT SS-SR.

NOISE: Noise sensitive area in effect, contact arpt manager

907-266-2741 for further information.

AIRPORT MANAGER: 907-266-2741


WEATHER DATA SOURCES: ASOS (907) 245-5432 (WX CAM)

COMMUNICATIONS: CTAF 126.8 ATIS 125.6 (907-245-5432)

® **ANCHORAGE APP/DEP CON** 119.1 363.2

TOWER 126.8 (907-245-5432)

CLNC DEL 119.4

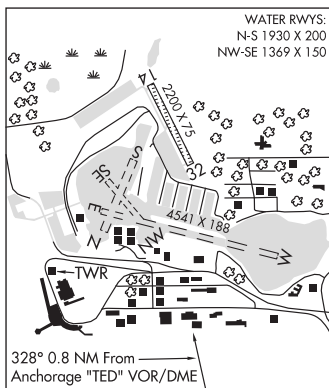

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

AIRSPACE: CLASS D.

RADIO AIDS TO NAVIGATION: NOTAM FILE ANC.

ANCHORAGE (H) VORW/DME 113.15 TED Chan 78(Y) N61°10.07' W149°57.61' 334° 1.1 NM to fld. 93/18E.

VOR unusable:

041°-091° byd 25 NM blo 15,000'

091°-096° byd 20 NM blo 15,000'

096°-121° byd 25 NM blo 12,500'

121°-146° byd 25 NM blo 9,000'

DME unusable:

041°-091° byd 25 NM blo 15,000'

091°-096° byd 20 NM blo 15,000'

096°-121° byd 25 NM blo 12,500'

121°-146° byd 25 NM blo 9,000'

196°-206° byd 25 NM blo 3,500'

206°-211° byd 25 NM blo 4,000'

211°-221° byd 25 NM blo 3,500'

COMM/NAV/WEATHER REMARKS: For a toll free call to Kenai FSS dial 1-866-864-1737.

WATERWAY E-W: 4541X188 (WATER)

WATERWAY N-S: 1930X200 (WATER)

WATERWAY SE-NW: 1369X150 (WATER)

SEAPLANE REMARKS: Special Air Traffic Rules-Part 93, see Regulatory Notices. Attended continuously. PPR for non-radio operations. TPA-673(600). No nighttime non-radio acft operations permitted. Ctc FAA at 907-271-5936, request to be transferred to twr. Provide an ETA and remain within plus or minus 15 minutes of ETA. Rwy 14-32 tfc pat overlaps seadrome pat. All waterlanes elev 76'. North pothole designated no-wake area to protect moored acft/shoreline. Lake clsd to acft over 12,500 lbs from freeze up til approximately Dec 31, overflows into ice may occur winter months. For availability of winter ski ops on lake sfcs, consult local NOTAMS and ctc twr prior to arrival/departure. Fuel avbl Rwy 14-32 transient parking and from various fixed base operators. Numerous water fowl and nesting area invof arpt. Large flocks of migratory birds invof arpt spring to fall. Floating debris on lake. Twy around Lake Hood is a joint use twy/road and is used by motor vehicles/bicyclists/joggers and tour buses. Use of ldg lgt when taxiing recommended. Rwy 14-32 ltd to acft 9000 lbs or less. Public ramps on N and W shore of Lake Hood. Area Southwest and Northwest of Lake Spenard from Canal eastward 1500' not visible from twr. Twy V PCL security gate east of Twy E, key 121.75 5 times to ACTIVATE. Twy H-2, Lakeshore twy gates PCL, Key 121.75 3 times to ACTIVATE. Arr/Dep routes; See Area Notices. See notice in Section C for arpt layout graphic.