

CLEVELAND—HOPKINS INTL (CLE)(KCLE) 9 SW UTC-5(-4DT) N41°24.56' W81°51.28' **DETROIT**
 800 B AOE Class I, ARFF Index C NOTAM FILE CLE **H-10G, L-30G**

RWY 06R-24L: H9953X150 (CONC-GRVD) S-100, D-185, 2S-175, 2D-340 PCN 63 R/B/W/T HIRL CL **IAP, AD**
RWY 06R: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 73'. RVR-TMR Thld dsplcd 1923'. Trees.
RWY 24L: MALSR. TDZL. PAPI(P4R)—GA 3.0° TCH 48'. RVR-TMR

RWY 06L-24R: H9000X150 (CONC-GRVD) S-75, D-200, 2S-175, 2D-400 PCN 78 R/B/W/T HIRL CL
RWY 06L: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 69'. RVR-TMR Trees.
RWY 24R: ALSF2. TDZL. PAPI(P4R)—GA 3.0° TCH 65'. RVR-TMR

RWY 10-28: H6018X150 (ASPH-CONC-GRVD) S-155, D-200, 2S-175, 2D-400 PCN 80 R/B/W/T HIRL 0.5% up E
RWY 10: REIL. PAPI(P4L)—GA 3.0° TCH 45'. RVR-R Tree.
RWY 28: MALSF. PAPI(P4R)—GA 3.0° TCH 45'. RVR-T Pole.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 06L: TORA-9000	TODA-9000	ASDA-9000	LDA-9000
RWY 06R: TORA-9956	TODA-9956	ASDA-9956	LDA-8029
RWY 10: TORA-6018	TODA-6018	ASDA-6018	LDA-6018
RWY 24L: TORA-9956	TODA-9956	ASDA-9956	LDA-9956
RWY 24R: TORA-9000	TODA-9000	ASDA-9000	LDA-9000
RWY 28: TORA-6018	TODA-6018	ASDA-6018	LDA-6018

ARRESTING GEAR/SYSTEM
RWY 10: EMAS
RWY 28: EMAS

SERVICE: S4 FUEL 100LL, JET A1+ OX 1, 2, 3, 4 LGT PAPI unusbl byd 8° L&R of cntrln.

NOISE: All apchs are ovr noise sensitive areas. Arprt late ngt noise abatement procedures are in effect 0400-1100Z‡.
 Additional noise abatement procedures are in effect call amgr normal business hrs at 216-265-6090.

AIRPORT REMARKS: Attended continuously. Deer, coyotes, & birds inclg waterfowl on & invof arprt. ASSC in use. Operate transponders with altitude reporting mode and ADS-B (if equipped) enabled on all airport surfaces. Twys clsd Oct-Apr to support deicing ops: Twy M; Twy J2; Twy M1 btn Twy L & Twy J1; Twy M2 btn Twy L & Twy J1. Txl H clsd to acft with wingspan ovr 171 ft. Pad 2 and Taxilane Y1 rstd to Group II acft, less than 79' wingspan. Ramp area concourse D between gates D1, D28 clsd except acft wingspan less than 86'. Pad 3 bays 1-5 clsd to acft with wingspan ovr 134'. Pad 3 bay 6 clsd to acft with wingspan over 94'. Twy F clsd to acft with wingspan over 118'. NASA Glenn Research Center; NASA ramp PPR call 216-433-2031; Mon-Fri 1300-2230Z‡. Contact NASA ops on freq 122.925 within 50 NM. Ldg Fee. ADCUS avbl dly 1200-0000Z‡, ltd avblty durg off hrs; all reqrs for svc must be made with US Cust Svc ofc lctd at gate A-14 call 216-267-3600 durg listed hrs.

AIRPORT MANAGER: 216-265-6963
WEATHER DATA SOURCES: ASOS (216) 416-2729 TDWR.
COMMUNICATIONS: D-ATIS ARR 127.85 D-ATIS DEP 132.375 UNICOM 122.95

RCO 122.3 (CLEVELAND RADIO)
APP CON 126.55
DEP CON 128.25 135.875
TOWER 124.5
GND CON 121.7 **CLNC DEL** 125.05
CPDLC (LOGON KUSA)
PDC

AIRSPACE: CLASS B See VFR Terminal Area Chart.

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

VOR TEST FACILITY (VOT) 110.4

RADIO AIDS TO NAVIGATION: NOTAM FILE CLE.

DRYER (VH) (DH) VOR/DME 113.6 DJB Chan 83 N41°21.48' W82°09.72' 082° 14.2 NM to fld. 780/5W.

VOR unusable:

- 001°-010° byd 40 NM
- 020°-024° byd 40 NM
- 034°-040° byd 55 NM
- 080°-095° byd 40 NM
- 110°-120° byd 40 NM
- 135°-145° byd 40 NM
- 135°-150°
- 155°-165°
- 160°-165° byd 40 NM
- 185°-195° byd 40 NM
- 187°-197°
- 210°-224° byd 40 NM
- 211°-218°
- 225°-235° byd 40 NM blo 11,000'
- 225°-235° byd 95 NM
- 225°-245° byd 20 NM blo 3,500'
- 245°-265° byd 40 NM
- 275°-285° byd 40 NM blo 18,000'
- 286°-355° byd 40 NM

DME unusable:

- 187°-197°
- 289°-310°
- 322°-332°
- 350°-060°

ILS/DME 111.55 I-LIZ Chan 52(Y) Rwy 06L. Class IIIE.

ILS/DME 111.9 I-CLE Chan 56 Rwy 06R. Class IIE.

ILS/DME 109.9 I-HPI Chan 36 Rwy 24L. Class IIE. LOC unusable byd 20° left of course.

ILS/DME 111.55 I-PVY Chan 52(Y) Rwy 24R. Class IIIE.

ILS/DME 110.7 I-XPX Chan 44 Rwy 28. Class IE.

COMM/NAV/WEATHER REMARKS: Freq 121.5 not avbl at FSS.

CUYAHOGA CO (CGF)(KCGF) 10 E UTC-5(-4DT) N41°33.88' W81°29.23'

876 B NOTAM FILE CGF

RWY 06-24: H5502X100 (ASPH-GRVD) S-90, D-123, 2D-213

PCN 35 F/C/X/U HIRL

RWY 06: REIL. PAPI(P4L)—GA 3.0° TCH 45'. Thld dsplcd 318'. Tree.

RWY 24: MALSR. PAPI(P4L)—GA 3.0° TCH 45'. Thld dsplcd 500'. Road.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 06: TORA-5502 TODA-5502 ASDA-5502 LDA-5184

RWY 24: TORA-5502 TODA-5502 ASDA-5502 LDA-5000

ARRESTING GEAR/SYSTEM

RWY 06: EMAS

RWY 24: EMAS

SERVICE: S4 FUEL 100LL, JET A, A+ OX 3 LGT When ATCT clsd actvt windsocks; MALSR Rwy 24; REIL Rwy 06; PAPI Rwy 06, HIRL Rwy 06-24—CTAF. PAPI Rwy 24 opr constly.

NOISE: Noise abatement procs in effect call arpt.

AIRPORT REMARKS: Attended 1100-0400Z. For aft hrs svc call 216-261-8800 drg atnnd hrs. Birds & wildlife on & invof arpt. Flt trg prohibited 0400-1200Z. ATCT vis SW ltd wi 500 ft AER Rwy 06.

AIRPORT MANAGER: 216-289-4111

WEATHER DATA SOURCES: AWOS-3PT (216) 289-4113


COMMUNICATIONS: CTAF 118.5 D-ATIS 119.95 (216)-289-4113

® CLEVELAND APP/DEP CON 125.35

COUNTY TOWER 118.5 (1200-0400Z) GND CON 121.85 CLNC DEL 121.85 (When twr clsd)

CLEARANCE DELIVERY PHONE: For CD when ATCT clsd ctc Cleveland Apch at 216-352-2323.

DETROIT
H-10G, L-30G
IAP, AD

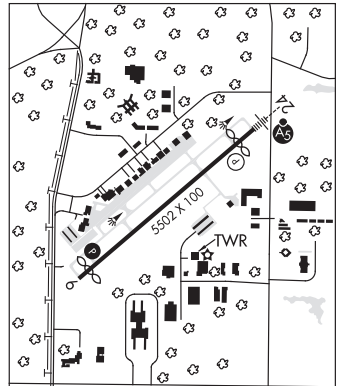

CONTINUED ON NEXT PAGE