

CONTINUED FROM PRECEDING PAGE

RADIO AIDS TO NAVIGATION: NOTAM FILE OCF.
OCALA (VL) (L) VORTAC 113.7 OCF Chan 84 N29°10.65' W82°13.58' 225° 26.0 NM to fld. 78/0E.
TACAN AZIMUTH unusable:
025°-078°
329°-350°
351°-024° byd 28NM
VOR unusable:
010°-024° byd 40 NM
030°-037° byd 40 NM
053°-060° byd 40 NM
065°-077° byd 40 NM
094°-108° byd 40 NM blo 3,000'
094°-108° byd 66 NM
127°-137° byd 40 NM
157°-171° byd 40 NM blo 13,000'
157°-171° byd 75 NM
177°-187° byd 40 NM blo 2,000'
177°-187° byd 54 NM
193°-210° byd 40 NM
219°-244° byd 40 NM
277°-298° byd 40 NM
325°-335° byd 40 NM blo 10,000'
325°-335° byd 76 NM
352°-005° byd 111 NM
352°-005° byd 40 NM blo 12,000'

CYPRESS N26°09.21' W81°46.69' NOTAM FILE APF.
(L) DME 108.6 CYY Chan 23 at Naples Muni. 9. **MIAMI**
H-8H, L-21D, 23B
DME unusable:
215°-315°

DADE-COLLIER TRAINING AND TRANSITION (See MIAMI on page 135)


DAYTONA BEACH INTL (DAB)(KDAB) 3 SW UTC-5(-4DT) N29°10.79' W81°03.48'
34 B TPA—See Remarks Class I, ARFF Index C NOTAM FILE DAB **JACKSONVILLE**
RWY 07L-25R: H10500X150 (ASPH-CONC-GRVD) S-120, D-214, 2S-175, 2D-406, 2D/2D2-919 PCR 650 R/A/W/T HIRL CL **H-8H, L-21D, 24G**
RWY 07L: MALSR. TDZL. RVR-T Thld dsplcd 690'. Road. **IAP, AD**
RWY 25R: MALSR. PAPI(P4L)—GA 3.0° TCH 72'. RVR-R Trees. Rgt tfc.
RWY 16-34: H6001X150 (ASPH-GRVD) S-109, D-191, 2S-175, 2D-355, 2D/2D2-750 PCR 420 F/A/X/T MIRL
RWY 16: REIL. PAPI(P4L)—GA 3.0° TCH 50'. Trees.
RWY 34: REIL. PAPI(P4L)—GA 3.0° TCH 50'. Trees.
RWY 07R-25L: H3195X100 (ASPH) S-26, D-44 PCR 90 F/C/X/T MIRL
RWY 07R: REIL. PAPI(P2L)—GA 3.0° TCH 48'. Trees. Rgt tfc.
RWY 25L: REIL. PAPI(P2L)—GA 3.0° TCH 44'. Trees.

LAND AND HOLD-SHORT OPERATIONS

LDG RWY	HOLD-SHORT POINT	AVBL LDG DIST
RWY 07L	TWY W	7500
RWY 16	07L-25R	2900
RWY 34	07L-25R	2564

RUNWAY DECLARED DISTANCE INFORMATION

RWY 07L:	TORA-10500	TODA-10500	ASDA-10500	LDA-9810
RWY 07R:	TORA-3195	TODA-3195	ASDA-3195	LDA-3195
RWY 16:	TORA-6001	TODA-6001	ASDA-5969	LDA-5969
RWY 25L:	TORA-3195	TODA-3195	ASDA-3195	LDA-3195
RWY 25R:	TORA-10500	TODA-10500	ASDA-10293	LDA-10293
RWY 34:	TORA-6001	TODA-6001	ASDA-6001	LDA-6001

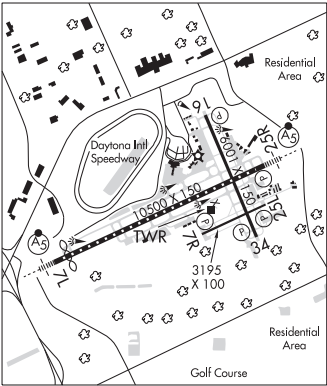

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

SERVICE: S4 FUEL 100LL, JET A OX 1 LGT Rwy 25R PAPI unusbl byd 5 deg left and right of cntrln.

NOISE: Use co fly quiet proc or rcmd noise abatement proc—Amgr.

AIRPORT REMARKS: Attended continuously. Hvy migratory bird act on and invof arpt. Hvy bird activity over landfill located 3.5NM SW of the airfield. Incrd drone act NE of arpt. Airfield sfc conds are not mntd btn the hrs of 0500–0900Z. All mil ops req 24 hr advnd cdn with arpt opns—PPR (386) 527–0657. All helo ops excp Twy W btn Twy A and Rwy 16 apch end clsd to rotary wing acft with rotor span more than 50' exc 1 hr. PPR—(386) 527–0657. PPR for Daytona Beach Speedway low apch or fly-over. Ctc ATC for pmsn. DAB Twy C1 clsd to acft wingspan more than 119 ft; Twy W clsd to acft wingspan more than 119 ft; Twy W3 clsd to acft wingspan more than 79 ft. First 2300 ft Rwy 07L concrete on 50 ft wide keel section. Rwy 07R–25L outer edges of pavement uneven. Rwy 07R–25L sked acr ops more than 9 pax seats or unsked acr at least 31 pax seats na. TPA—TPA for lgt acft 965 ft AGL; TPA for hi per acft 1365 ft AGL. Twy 'N' N of Rwy 07L–25R can be mistaken for rwy and apch environment. E end of Twy S end is non-movement area. Twy E rstrd to 22,000 lbs max crtfd gross tkof weight; Twy P rstrd to 190,500 lbs max crtfd gross tkof weight. Twy W btn apch end Rwy 16 and Twy A clsd to mil hel ops and hover tax ops. Twy W btn Twy A and apch end Rwy 16 clsd to rotary wing acft rotar span more than 50 ft exc 1 hr PPR 386–527–0657. Rotor wing hel must grnd taxi; if unabl use ctn durg hover taxi. Twy W btn Rwy 16 apch end and Twy A clsd to mil hel and hover taxi ops. Twy W btn Twy A and Rwy 16 apch end clsd to rotary wing with rotar span more than 50 ft exc 1 hr PPR—386–527–0657. US Custs ramp Rstrd Group II acft of wingspan 79 ft or less. Rwy 07L lead-off lines for Twy P3 and Twy P4 for Group 1 acft only with wingspan of less than 49'. SAID in use. Operate transponders with altitude reporting mode and ADS-B (if equipped) enabled on all airport surfaces.

AIRPORT MANAGER: 386-248-8030

WEATHER DATA SOURCES: ASOS (386) 232-5134 LLWAS.

COMMUNICATIONS: ATIS 132.875 UNICOM 122.95

® **APP CON** 118.85 (North 4000'–7500') 125.35 (South 3500' and blo) 127.075 (South 4000'–7500') (125.725 (8000'–11000')) 125.8 (North 3500' and blo)

TOWER 120.7 **GND CON** 121.9 **CLNC DEL** 119.3

AIRSPACE: CLASS C svc ctc **APP CON**.

RADIO AIDS TO NAVIGATION: NOTAM FILE OMN.

ORMOND BEACH (VH) (H) VORTAC 112.6 OMN Chan 73 N29°18.20' W81°06.76' 159° 7.9 NM to fld. 24/OE.

VOR unusable:

034°–036° byd 40 NM
070°–100° byd 35 NM blo 1,500'
099°–112° byd 40 NM
122°–141° byd 40 NM
159°–161° byd 40 NM
170°–181° byd 40 NM blo 3,000'
170°–181° byd 46'
207°–209° byd 40 NM
236°–239° byd 40 NM
240°–244° blo 6,000'
240°–250° byd 53 NM
251°–286° byd 40 NM
290°–298° byd 40
290°–300° byd 20 NM blo 2,500'
318°–321° byd 40 NM
326°–328° byd 40 NM

ILS 109.7 I–DAB Rwy 07L. Class IA. Auto cpd apch NA blw 535' MSL due to glideslope reversal

ILS/DME 109.7 I–DBF Chan 34 Rwy 25R. Class IE.