

## CONTINUED FROM PRECEDING PAGE

## RADIO AIDS TO NAVIGATION: NOTAM FILE RNO.

(VL) (DH) VOR/DME 114.65 LWL Chan 93(Y) N41°08.69' W114°58.65' 106° 3.0 NM to fld. 5888/17E.

## VOR unusable:

000°-060° byd 30 NM blo 12,000'  
 061°-100° byd 30 NM  
 101°-140° byd 25 NM blo 11,000'  
 101°-140° byd 34 NM blo 16,000'  
 101°-140° byd 40 NM  
 145°-159° byd 40 NM  
 170°-219° byd 10 NM  
 310°-329° byd 40 NM  
 330°-350° byd 10 NM  
 351°-359° byd 25 NM blo 13,000'  
 351°-359° byd 34 NM blo 17,500'  
 351°-360° byd 40 NM

## DNE unusable:

000°-060° byd 10 NM  
 061°-100° byd 30 NM  
 101°-140° byd 25 NM blo 16,000'  
 170°-219° byd 10 NM  
 330°-350° byd 10 NM  
 351°-359° byd 25 NM blo 13,000'  
 351°-359° byd 34 NM blo 17,500'

## WILSON CREEK N38°15.01' W114°23.65' NOTAM FILE RNO.

LAS VEGAS

(VH) (H) VORTAC 116.3 ILC Chan 110 167° 27.8 NM to Lincoln Co. 9318/16E.

H-3D, L-9B

RCO 122.1R 116.3T (RENO RADIO)

RCO 122.6 (RENO RADIO)

## WINNEMUCCA MUNI (WMC)(KWMC) 5 SW UTC-8(-7DT) N40°53.80' W117°48.35'

KLAMATH FALLS

4308 B TPA-5108(800) NOTAM FILE WMC

H-3C, L-11B

RWY 14-32: H7000X100 (ASPH) S-75, D-125, 2S-159, 2D-200

IAP, AD

PCR 340 F/C/X/T MIRL

RWY 14: REIL. PAPI(P2L)-GA 3.0° TCH 40'. P-line.

RWY 32: REIL. PAPI(P2L)-GA 3.0° TCH 40'.

RWY 02-20: H4800X75 (ASPH) S-28 PCR 80 F/C/X/T MIRL

RWY 20: REIL. PAPI(P2L)-GA 3.0° TCH 40'. Road.

SERVICE: S2 FUEL 100LL, JET A OX 3, 4 LGT Actvt REIL Rwy 14 and 32, 20; MIRL Rwy 14-32-CTAF. Preset low intst; incr/decr intst -CTAF.

AIRPORT REMARKS: Attended Nov-May 1600-0100Z†, Jun-Oct Mon-Fri 1500-0200Z†. Aft hrs or emerg call (775) 304-5885. Call FBO for current rwy conditions in winter months. Mountains in SW quadrant. Full strength pavement areas include N 1000 ft of parallel twy (Rwy 14-32 to Twy A); W 1000 ft of Twy A; 600 ft of N/S twr (from Twy A).


AIRPORT MANAGER: 775-623-6333

WEATHER DATA SOURCES: ASOS 120.175 (775) 277-3051.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.3 (RENO RADIO)

® SALT LAKE CENTER APP/DEP CON 132.25

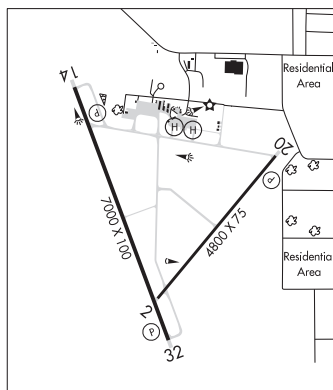

CONTINUED ON NEXT PAGE

**CLEARANCE DELIVERY PHONE:** For CD if una to ctc on FSS freq. ctc Salt Lake ARTCC at 801-320-2568.

RADIO AIDS TO NAVIGATION: NOTAM FILE RNO.

VOR unusable:

VOR unusable:

017°-081° byd 40NM

017°-081° byd 40NM

030°-160° byd 20 NM blo 15.000'

089°–168° byd 40 NM

219°–261° byd 40 NM

220°–245° byd 20 NM blo 15.000'

273°–284° byd 40 NM

298°–342° byd 40 NM

300°–345° byd 20 NM blo 13.000'

343°–353° byd 40 NM blo 10,000'

343°–353° byd 77 NM

TACAN AZIMUTH unusable:

030°-160° byd 20 NM blo 15.000'

220°–245° byd 20 NM blo 15.000'

300°–345° byd 20 NM blo 13,000'

DMF unusable:

030°-054° byd 20 NM blo 15.000'

055°–065° byd 20 NM blo 16.000'

066°–160° byd 20 NM blo 15.000'

220°–245° byd 20 NM blo 15.000'

300°-045° byd 20 NM blo 13.000'

WINNIE (DH) DME 113.8 UUC Chan 85 N40°54.24' W117°48.12' at fld. 4305. NOTAM FILE WMC.

DMF unusable:

003°-017° byd 28 NM blo 17.500'

067°–143° byd 15 NM

191°–231° byd 13 NM

250°–259° byd 30 NM

287°–293° byd 35 NM blo 12.000'

HELIPAD H1: H25X25 (CONC)

HELIPAD H2: H25X25 (CONC)

**HELIPORT REMARKS:** Helipad H1 unmrkd 25 ft x 25 ft concrete tlof adjacent to apron prkg and Twy Alpha. Helipad H2 adjacent to apron parking and Twy Alpha. Helipad H1 and H2 perimeter edging is damaged.

## YERINGTON

**FLYING M RANCH** (3A5) 24 S UTC-8(-7DT) N38°36.77' W119°00.14'

SAN FRANCISCO

4922 NOTAM FILE

RWY 18-36: H5662X60 (ASPH)

RWY 08-26: 1877X80 (DIRT)

**AIRPORT REMARKS:** Unattended. Prior permission required. PPR – 775-463-1609 runner stn and visitor ctr or 775-867-3001 park rgn off hq, Fallon ofc. Spl pilot fam, trng, equip, and acft per rcmd. Rcmd dep Rwy 18, ldg Rwy 36 due to slope and trrn obstructions. Rwy 08-26 normly clsd due to cattle fence at intrxn of Rwy 18-36.

**AIRPORT MANAGER: 775-463-1609**

HELIPAD H1: H20X20 (ASPH)

HELIPAD H1: ALSAF.

**HELIPORT REMARKS:** Helipad H1—ingress on southeasterly hdgs, egress on northwesterly hdgs. TLOF dimensions 20 ft x 20 ft. FATO dimensions 105 ft x 105 ft. H1 lighting U/S.