

## CONTINUED FROM PRECEDING PAGE

VOR TEST FACILITY (VOT) 112.0

RADIO AIDS TO NAVIGATION: NOTAM FILE CLT.

(L) (L) VOR/DME 115.0 CLT Chan 97 N35°11.42' W80°57.11' 006° 1.4 NM to fld. 732/5W.

DME portion unusable:

015°-050° byd 25 NM blo 3,000'

050°-100° byd 25 NM blo 2,500'

185°-202° byd 15 NM

203°-220°

270°-350° byd 20 NM blo 5,000'

VOR/DME controlled by Charlotte ATCT

VOR unusable:

203°-220°

ILS/DME 111.3 I-PEP Chan 50 Rwy 18C. Class IT.

ILS/DME 110.35 I-VKQ Chan 40(Y) Rwy 18L. Class IB.

ILS/DME 110.15 I-RGS Chan 38(Y) Rwy 18R. Class III.

ILS 111.7 I-DQG Rwy 36C. Class III.

ILS/DME 110.15 I-XUU Chan 38(Y) Rwy 36L. Class III.

ILS/DME 108.9 I-BQC Chan 26 Rwy 36R. Class III.

COMM/NAV/WEATHER REMARKS: Rwy sfc cond info durg duty hrs phone ANG Ops V583-9177/9144 or Airborne 292.2.

## CHARLOTTE/MONROE EXEC (See MONROE on page 335)

CHERRY POINT MCAS (CUNNINGHAM FLD) (NKT)(KNKT) MC 2 NE UTC-5(-4DT) N34°54.19'

CHARLOTTE

W76°52.85'

H-9C, L-35B

29 B NOTAM FILE NKT Not insp.

DIAP, AD

RWY 14L-32R: H8978X200 (ASPH) PCN 80 R/B/W/T HIRL

RWY 14L: PAPI(P4L)—GA 3.0° TCH 72'.

RWY 05L-23R: H8489X196 (ASPH) PCN 80 F/A/W/T HIRL

RWY 05L: Thld dsplcd 935'.

RWY 23R: MALSR. REIL. PAPI(P4L)—GA 3.0° TCH 71'.

RWY 14R-32L: H8397X200 (ASPH) PCN 80 F/A/W/T HIRL CL

RWY 14R: Thld dsplcd 848'.

RWY 32L: ALSF1. PAPI(P4L)—GA 3.0° TCH 73'.

RWY 05R-23L: H8189X200 (ASPH) PCN 80 R/B/W/T HIRL

RWY 05R: PAPI(P4L)—GA 3.0° TCH 73'.

## RUNWAY DECLARED DISTANCE INFORMATION

RWY 05L:TORA-8489 TODA-8489 ASDA-8489 LDA-7554

RWY 14R:TORA-8397 TODA-8397 ASDA-8397 LDA-7549

RWY 23R:TORA-7554 TODA-8489 ASDA-8489 LDA-7554

RWY 32L:TORA-8397 TODA-8397 ASDA-8397 LDA-7549

## ARRESTING GEAR/SYSTEM

RWY 05R HOOK E28(B) (1500 FT)

HOOK E28(B) (2438 FT). RWY 23R

RWY 14L HOOK E28(B) (1500 FT)

HOOK E28(B) (1500 FT) RWY 32L

**SERVICE:** FUEL 100LL, J5 OX 1, 2 MILITARY—LGT Portable lgt—mobile flood lgt. A—GEAR All E-28(B) in raised posn exc on ldg rwy. Rqr 15 min PN. JASU 2 working days PN rqr. 2(GTC-85) 1(NCPP-105) FUEL 100LL: Hot pit refuel avbl. FLUID SP PRESAIR HPOX LOX DE-ICE TRAN ALERT PPR min 24 hrs in advance. Tran acct with inert ordnance, hot pit refuel ltd to F18, USAF F15, F16, and A10 acct only. IAW Cherry Point airops maint. Ltd tran maint avbl 1200-2100Z† Mon-Fri.

**MILITARY REMARKS:** Opr 24 hrs. See FLIP AP/1 Supplementary Arprt Remarks. Min 24 hr notice if anti-icing/de-icing svc rqr, ctc tran acct DSN 582-3232, C252-466-3232. Rwy 05L-23R has a Y AMP-3 ALZ painted on rwy. Rwy 14R-32L has a W AMP-3 ALZ painted on rwy. RSTD Min 24 hr ntc PPR all tran acct. Call Base OPS DSN 582-2233/4334, C252-466-2233/4334. Fit Planning/Base OPS opr 24 hr exc Federal hol, exp closure or reduced svcs per NOTAM. All rwy and twy, exc Twy A and Twy C will support all acct at all wt. Acft restricted fm taxiing on Twy K btn Rwy 23R and Test Cell. Towing operations only. CAUTION Unltd twr at NKT200006 549'. Extv stu jet trng (V/STOL) acct vcnty arpt. Tran acct exp str—in full stop ldg only dur peak stu trng periods. Bird haz Oct-Apr. Drainage ditches parl all rwy. Wildlife haz on arpt, especially SS-R. Obst aprx 200' near NKT R-205/3. TFC PAT Overhead alt 1529'(1500' AGL), pat alt 1029'(1000' AGL).. Reduced rwy separation in effect for USN/USMC acct. CSTMS/AG/IMG CSTMS, AG avbl with 24 hr PN. Ref FCG for details. Acft arr from overseas ctc ops via fone patch 252-466-2233 min 2 hr prior to arr for cstms. MISC All acct with pax/cargo/DV must ctc PTD 20 min prior to ldg. Twr terminology centermat is defined as the ctr of afld where the four twy int, rated for all acct wheel wts.

AIRPORT MANAGER: 252-466-2233

## CONTINUED ON NEXT PAGE

## CONTINUED FROM PRECEDING PAGE

COMM/NAV/WEATHER REMARKS: Radar see Terminal FLIP for Radar Minima.

COMMUNICATIONS: SFA ATIS 127.475 244.875

Ⓡ APP/DEP CON 119.35 377.175 (W) 124.1 268.7 (H) 132.575 299.6 East 3000' and blw; 119.75 360.775 East abv 3000'

TOWER 121.3 340.2 360.2 (Exp fld closure on natl hol wkends) GND CON 128.625 239.025

CLNC DEL 125.95 316.125 PMSV METRO 343.5 BASE OPS 126.2 305.7

AIRSPACE: CLASS D svc continuous; other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE RDU.

(L) TACAN Chan 75 NKT (112.8) N34°54.14' W76°52.49' at fld. 25/9W.

TACAN AZIMUTH unusable:

052°-060° byd 10 NM blo 3,000'

061°-089° byd 6 NM blo 5,000'

090°-109° byd 10 NM blo 3,000'

ILS/DME 108.9 I-NKT Chan 26 Rwy 23R. Class IB.

ASR/PAR

**CHOCOWINITY** N35°30.58' W77°06.40' NOTAM FILE OCW.  
NDB (MHW) 388 RNW 045° 4.6 NM to Washington-Warren. 44/8W.

CHARLOTTE  
L-35C

**CLINTON-SAMPSON CO** (CTZ)(KCTZ) 2 SW UTC-5(-4DT) N34°58.50' W78°21.94'  
144 B NOTAM FILE CTZ

CHARLOTTE  
H-9C, 12H, L-35B, 36F  
IAP

RWY 06-24: H5008X75 (ASPH) S-26 MIRL 0.3% up NE

RWY 06: REIL. PAPI(P2L)—GA 3.0° TCH 39'. Trees.

RWY 24: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Trees.

SERVICE: S4 FUEL 100LL, JET A1+ LGT ACTIVATE REIL Rwy 06 and 24—CTAF. PAPI Rwy 06 and 24 on 24 hrs. MIRL Rwy 06-24 dusk-dawn.

**AIRPORT REMARKS:** Attended Mon-Sat 1330-2300Z†, Sun 1800-2300Z†. For arpt attendant after hrs call 910-592-3295 or 910-590-9100. 40' drop-off Rwy 06 325' from thr and 120' left. 60' + drop-off 20' fm thr and 110' right of cntrl. 30' drop-off Rwy 24 350' fm thld and 175' right of cntrl. 50' trees 300' from cntrl penetrate transitional sfc NW side of rwy fm Rwy 24 apch sfc to Rwy 06 thr. 70' drop-off 50' to 100' left of cntrl Twy A at Rwy 06.

**AIRPORT MANAGER:** 910-592-3295

**WEATHER DATA SOURCES:** AWOS-3 119.125 (910) 592-7488.

**COMMUNICATIONS:** CTAF/UNICOM 122.8

RCO 122.3 (RALEIGH RADIO)

Ⓡ FAYETTEVILLE APP/DEP CON 133.0

RADIO AIDS TO NAVIGATION: NOTAM FILE FAY.

FAYETTEVILLE (L) (L) VOR/DME 114.85 FAY Chan 95(Y)

N34°59.13' W78°52.50' 095° 25.1 NM to fld. 187/4W.

VOR unusable:


058°-068° blo 4,000'

090°-100°

DME unusable:

090°-100°

NDB (MHW) 412 CTZ N34°58.51' W78°21.72' at fld. 141/9W. NOTAM FILE CTZ.

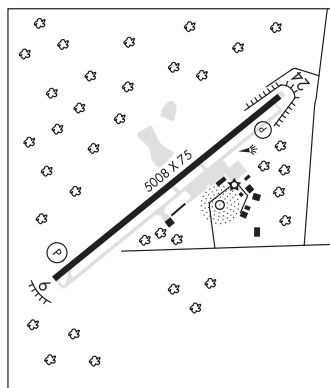

**COASTAL CAROLINA RGNL** (See NEW BERN on page 339)

**COLUMBUS CO RGNL** (See WHITEVILLE on page 371)