

CONTINUED FROM PRECEDING PAGE

AIRSPACE: CLASS B See VFR Terminal Area Chart.

RADIO AIDS TO NAVIGATION: NOTAM FILE LAS.

LAS VEGAS (VH) (H) VORTACW 116.9 LAS Chan 116 N36°04.78' W115°09.59' at fld. 2136/15E.

No NOTAM MP: 1600-1800Z† Sat

VOR unusable:

033°-045° byd 26 NM blo 9,000'
080°-097° byd 36 NM blo 10,000'
102°-170° byd 22 NM blo 12,000'
170°-218° byd 25 NM blo 11,000'
360°-359° byd 40 NM

TACAN AZIMUTH unusable:

033°-045° byd 26 NM blo 9,000'
080°-097° byd 36 NM blo 10,000'
102°-170° byd 22 NM blo 12,000'
170°-218° byd 25 NM blo 11,000'
224°-336° byd 35 NM blo 15,000'
360°-359° byd 40 NM

DME unusable:

033°-045° byd 26 NM blo 9,000'
080°-097° byd 36 NM blo 10,000'
102°-170° byd 22 NM blo 12,000'
170°-218° byd 25 NM blo 11,000'
224°-336° byd 35 NM blo 15,000'
360°-359° byd 40 NM

ILS/DME 110.1 I-CUA Chan 38 Rwy 01L. Class IB. LOC unusable byd 30° left of course; wi 0.2 NM fm thld.

ILS/DME 111.5 I-RLE Chan 52 Rwy 26L. Class IE. LOC unusable byd 19° south of course.

ILS/DME 110.3 I-LAS Chan 40 Rwy 26R. Class IE.

COMM/NAV/WEATHER REMARKS: Ops at all trml gates and cargo ramp ctd by Dept of Aviation 1300-0900Z†. All acft ctc Ramp Ctl on freq 124.4 for ops at A, B, C gates and GA Customs; ctc Ramp Ctl 127.9 for ops at D and E gates and cargo ramp prior to entering ramp or pushing back from gate or prkg spot. Ramp ctl oper hrs 1300-0900Z†. Broadcast on UNICOM 122.95 fm 0900-1300Z† for ramp ops.

HENDERSON EXEC (HND)(KHND) 11 S UTC-8(-7DT) N35°58.37' W115°08.06'

2491 B NOTAM FILE HND

RWY 17R-35L: H6501X100 (ASPH) S-30, D-60 MIRL 1.4% up S

RWY 17R: REIL. PAPI(P4L)—GA 3.0° TCH 41'.

RWY 35L: REIL. PAPI(P4L)—GA 4.3° TCH 52'. Road.

RWY 17L-35R: H5001X75 (ASPH) S-30, D-30 MIRL 1.4% up S

RWY 17L: REIL. PAPI(P4L)—GA 3.0° TCH 40'.

RWY 35R: REIL. PAPI(P4L)—GA 4.3° TCH 52'.

SERVICE: S2 FUEL 100LL, JET A OX1, 2 LGT ACTVT REIL Rwy 17R and 35L, Rwy 17L and 35R; PAPI Rwy 17R and Rwy 35L, Rwy 17L and Rwy 35R; MIRL Rwy 17R-35L, Rwy 17L-35R—CTAF. Rwy end 35L: PAPI unusbl byd 3.3 NM fm rwy thr. Rwy end 35R: PAPI unusbl byd 3.5 NM fm rwy thr.

AIRPORT REMARKS: Attended 1300-0630Z†. 100LL self-svc H24. Coml air tour tfc arr fm SE dur dalgt hr. Ctn: acft dep Rwy 17R or Rwy 35L must verify psn on rwy not on parl twy. Rwy 17L-35R ops dly 0300-1500Z†. When spl event prkg PPR program NOTAM is actv, tsnt acft ops not perm based need to obtain a PPR nr fm an FBO for ea ldg. PPR apvl and confirmation nrs can be obtained fm the sel FBO at 702-261-7775. PPR confirmation nrs should be entered in the rmks section of each flt plan. NOTE: See Special Notices—Arrival Alert.

AIRPORT MANAGER: 702-261-4802

WEATHER DATA SOURCES: AWOS-3PT 120.775 (702) 614-4537. Wx sensor type: includes type z - freezing rain sensor

COMMUNICATIONS: CTAF 125.1 ATIS 120.775 UNICOM 122.95

MOUNT POTOSI RCO 122.6 (RENO RADIO)

® LAS VEGAS APP/DEP CON 125.475


TOWER 125.1 (1400-0400Z†) GND CON 127.8 CLNC DEL 118.425 125.475 (when twr clsd)

CLEARANCE DELIVERY PHONE: For CD when ATCT clsd ctc LAS Apch on 125.475 or ph 725-200-4432.

LAS VEGAS

H-41, L-7E

IAP, AD

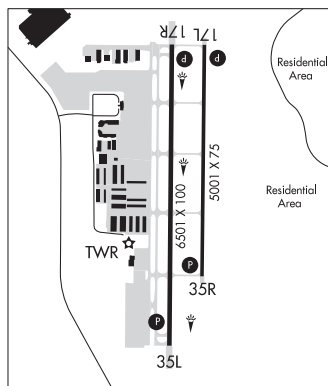

CONTINUED ON NEXT PAGE

NEVADA

CONTINUED FROM PRECEDING PAGE

AIRSPACE: CLASS D svc 1400-0400Z±; other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE RNO.

BOULDER CITY (VH) (H) VORTACW 116.7 BLD Chan 114 N35°59.75' W114°51.81' 249° 13.3 NM to fld.
3642/15E.

VOR unusable:

005°-010° byd 40 NM
057°-070° byd 40 NM blo 28,000´
071°-085° byd 40 NM blo 10,000´
071°-085° byd 52 NM blo 13,500´
071°-085° byd 71 NM blo 17,000´
071°-085° byd 95 NM
155°-180° byd 30 NM blo 9,000´
192°-205° byd 40 NM
208°-218° byd 40 NM blo 10,000´
208°-218° byd 88 NM
219°-232° byd 40 NM
245°-255° byd 40 NM
264°-274° byd 40 NM blo 29,000´
275°-288° byd 40 NM blo 24,000´

NORTH LAS VEGAS (VGT)(KVGT) 3 NW UTC-8(-7DT) N36°12.64' W115°11.67'

2205 B TPA—3005(800) NOTAM FILE VGT

RWY 07-25: H5005X75 (ASPH) S-30 PCN 58 F/C/X/T MRL

0.6% up W

RWY 07: REIL. PAPI(P4L)—GA 3.0° TCH 37'. Pole.

RWY 25: REIL, PAPI(P4L)—GA 3.0° TCH 36'.

RWY 12R-30L: H5000X75 (ASPH) S-30 PCN 48 F/C/X/T MRL

0.8% up NW

RWY 12R: REIL. PAPI(P4L)—GA 3.0° TCH 25'. Bldg.

RWY 30L: REIL. PAPI(P4L)—GA 3.0° TCH 40'.

RWY 12L-30R: H4199X75 (ASPH) S-30 PCN 15 F/C/X/T MIRL

1.0% μ D NW

RWY 12L: REIL. PAPI(P4L)—GA 3.2° TCH 48'. Bldg.

RWY 30R: REIL, PAPI(P4L)—GA 3.0° TCH 41', Thld dspcd 199'.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 07: TORA-5005 TODA-5005 ASDA-5005 LDA-5005

RWY 12L: TORA-4199 TODA-4199 ASDA-4199 LDA-4199

RWY 12B: TORA-5000 TODA-5000 ASDA-5000 LDA-5000

RWY 25: TODA-5005 TODA-5005 ASDA-5005 LDA-5005

RWY 30I: TODA-5000 TODA-5000 ASDA-5000 LDA-5000

RWY 30B: TORA-4199 TODA-4199 ASDA-4199 LDA-4000

SERVICE: S4 FUEL 100LL JET A OX 1 LGT When ATCT clsd ACTVT

REIL Rwy 07 and Rwy 25, Rwy 12L and Rwy 30R, Rwy 12R and Rwy 30L; PAPI Rwy 07 and Rwy 25, Rwy 12L and Rwy 30R, Rwy 12R and Rwy 30L; MIRL Rwy 07–25, Rwy 12R–30L and Rwy 12L–30R; twy lgt—CTAF.

AIRPORT REMARKS: Attended 1300-0630Z. Aiming point mxd at 1000 ft - all rwys. Rwy guard lgt at all intrns. When spl event prkg PPR program NOTAM is actv, tsnt acct opers not perm based need to obtain a PPR nr fm an FBO for ea ldg. PPR apvly and confirmation nrs can be obtained fm the sel FBO at 702-261-7775. PPR confirmation nrs should be entered in the rmks section of each flt plan. SAID in use. Operate transponders with altitude reporting mode and ADS-B (if equipped) enabled on all airport surfaces. Rwy 12R calm wind rw. NOTE: See Special Notices—Arrival Alert.

AIRPORT MANAGER: 702-261-3804

WEATHER DATA SOURCES: ASOS 118.05 (702) 648-6633. LAWRS.

COMMUNICATIONS: CTAF 125.7 UNICOM 122.95 ATIS 118.05 (702-631-7125)

NELLIS APP CON 118.125 (Rwy 12)


® LAS VEGAS APP/DEP CON 119.4

TOWER 125.7 119.15 (Oct-Mar 1400-0400Z±, Apr-Sep 1400-0500Z±) GND CON 121.7 CLNC DEL 124.0

CLEARANCE DELIVERY PHONE: For CD when ATCT is clsd etc LAS Apch on 124.0 or ph 725-200-4432.

AIRSPACE: CLASS D SYC 1400-0400Z† Oct-Mar. 1400-0500Z† Apr-Sep; other times CLASS G

VOR TEST FACILITY (VOT) 108.2

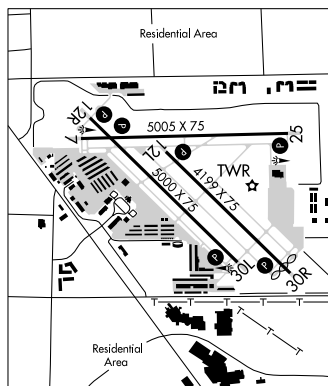

LAS VEGAS
H-41, L-7E
IAP. AD

CONTINUED ON NEXT PAGE