


BILOXI, MISSISSIPPI

ILS or LOC RWY 22

LOC I-BIX 109.7	APCH CRS 217°	Rwy ldg THRE 17 Arpt Elev 33	AL-49 [USAF]	KEESLER AFB (KBIX)
RADAR or DME required. * When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1½ miles.			ALSF-1 	† MISSED APPROACH: Climb to 800 tracking 217°, upon reaching 800 turn left to intercept BIX TACAN R-186 climbing to 2200 to 11 DME (RUDLF) and hold.
ATIS 281.55	GULFPORT APP CON 124.6 354.1 (130°- 309°) 127.5 254.25 (310°- 129°)	TOWER ★ 120.75 269.075	GND CON 121.8 275.8	CLNC DEL 121.8 275.8

• 272

† Missed approach requires use of RNAV or ATC RADAR monitoring.
Non-TACAN equipped aircraft expect ATC instructions.

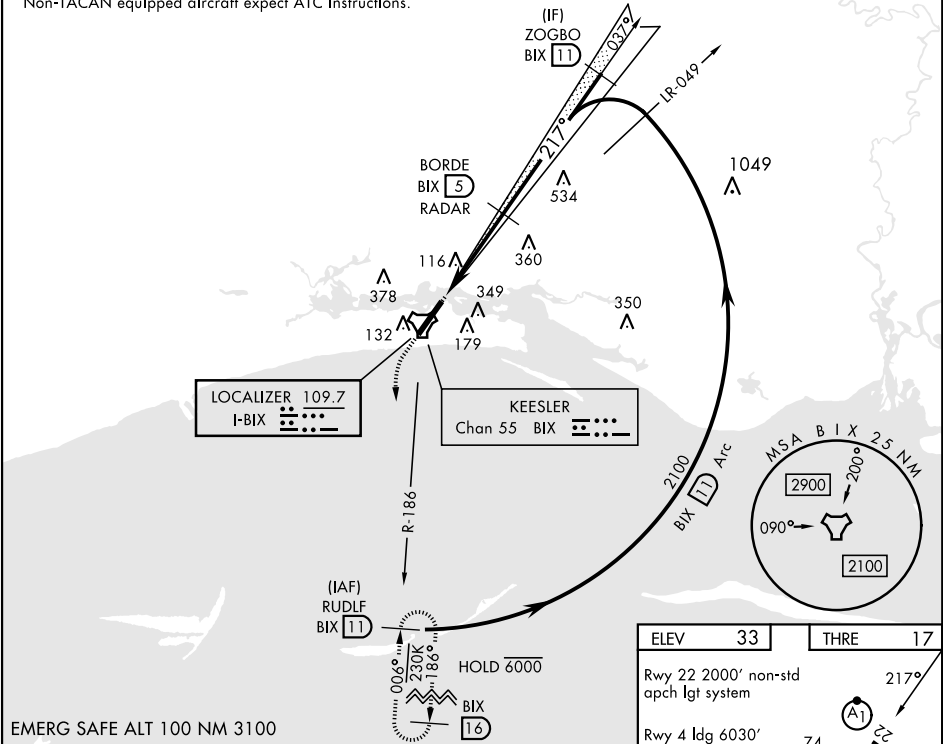

EMERG SAFE ALT 100 NM 3100

800	2200	RUDLF BIX 11	BORDE BIX 5	ZOGBO BIX 11	RUDLF BIX 11
tr 217°	BIX R-186				
TACAN	CULUG BIX 1.3	217°	2100	2100	GP 3.00° TCH 53
0.5	3.7 NM	1400	1400	1400	
CATEGORY	A	B	C	D	
S-ILS 22	217/40	200	(200-¾)		
S-LOC 22*	540-1 523 (600-¾)	540-1¼ 523 (600-1¼)			
✪ CIRCLING	580-1 547 (600-1)	660-1 627 (700-1)	680-1¼ 647 (700-1¾)	680-2 647 (700-2)	

ELEV 33	THRE 17
Rwy 22 2000' non-std apch lgt system	
Rwy 4 ldg 6030' Rwy 22 ldg 6630' HIRL Rwy 4-22 REIL Rwy 4	
FAF to MAP 3.7 NM	
Knots	60 90 120 150 180
Min:Sec	3:42 2:28 1:51 1:29 1:14

BILOXI, MISSISSIPPI

30° 25' N-88° 55' W

KEESLER AFB (KBIX)

Amnd 2 03NOV22

ILS or LOC RWY 22

SC-4, 16 MAY 2024 to 13 JUN 2024

SC-4, 16 MAY 2024 to 13 JUN 2024