GOODYEAR

PHOENIX GOODYEAR (GYR)(KGYR) 1 SW UTC–7 N33°25.40´ W112°22.52´ **PHOENIX**
969 B TPA—See Remarks NOTAM FILE GYR **H–4J, L–5B, A**
IAP, AD

RWY 03–21: H8500X150 (ASPH) S–115, D–225, 2D–505, 2D/2D2–985 PCN 66 F/B/W/T MIRL
RWY 03: REIL. PAPI(P4L)—GA 3.0° TCH 53´. 0.4% up.
RWY 21: REIL. PAPI(P4L)—GA 3.0° TCH 53´. Rgt tfc. 0.3% down.

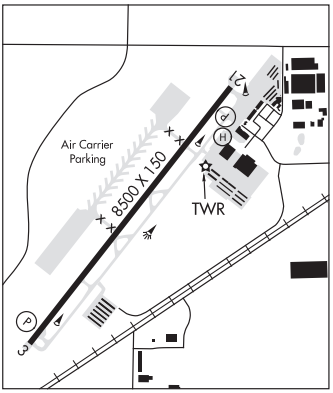

SERVICE: S4 **FUEL** 100LL, JET A **OX** 1, 2, 3, 4 **LGT** For MIRL Rwy 03–21 or REIL Rwy 03 and Rwy 21 durg daylight hrs ctc ATCT or arpt on 623–932–4550. After SS MIRL Rwy 03–21 are on. PAPI Rwy 03 and Rwy 21 operate continuously.

NOISE: Noise abatement in effect ctc 602–273–4300. Noise sensitive neighborhood 1–3 miles NNE–NE of arpt.

AIRPORT REMARKS: Attended continuously. Birds invof arpt. Coyotes and other wildlife ocnl crossing rwys/twys. E–W power lines 100 feet AGL 1/2 mile S AER 03 unmarked and unlighted some NSTD marking. Nmrs large acft parked aprxly 500´ W of Rwy 03–21. Mountains SE at 6 miles to 4500´ MSL. Military jet tfc 5 miles west of arpt. Acft dep Rwy 03 assigned right crosswind climb straight ahead to Litchfield Rd or passing 1032´ AGL before starting right turn. When twr clsd, Twy A between intersection Twy A3 and Twy A10, rstd to acft with wingspan 118´ or less. TPA –1969(1000) light acft and non–turbo jets; 2469(1500) heavy acft and turbo jets; 1469(500) helicopters. Fee for all charters; travel clubs and certain revenue producing acft. NOTE: See Special Notices—Aerobatic Operations.

AIRPORT MANAGER: 623-932-4550

WEATHER DATA SOURCES: LAWRS.

COMMUNICATIONS: CTAF 120.1 **ATIS** 118.35 **UNICOM** 122.95
PHOENIX RCO 122.2 (PRESCOTT RADIO)
Ⓡ **LUKE APP/DEP CON** 125.45 (1300–0530Z Mon–Thu, 1300–0130Z Fri, clsd wkend, hol and AETC family days).
Ⓡ **PHOENIX APP/DEP CON** 120.7 (0530–1300Z Tue–Fri; 0130Z Sat–1300Z Mon, H24 hol and AETC family days).
GOODYEAR TOWER 120.1 (1300–0400Z) **GND CON** 121.7

CLEARANCE DELIVERY PHONE: For CD when ATCT clsd, ctc Phoenix Apch at 602-306-2565.

AIRSPACE: CLASS D svc 1300–0400Z; other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.
BUCKEYE (L) (L) VORTAC 110.6 BXK Chan 43 N33°27.21´ W112°49.48´ 080° 22.6 NM to fld. 1067/14E.
VOR unusable:
060°–075° byd 28 NM blo 4,000´
230°–260° byd 35 NM blo 5,000´
280°–320° byd 35 NM blo 7,000´
320°–020° byd 37 NM blo 6,000´
TACAN AZIMUTH unusable:
020°–072° byd 28 NM blo 8,000´
DME unusable:
020°–072° byd 28 NM blo 8,000´

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not available at twr.

• • • • • • • • • • • • • • • • • •

HELIPAD H1: H64X64 (CONC) PERIMETER LGTS

HELIPORT REMARKS: Helipad H1 perimeter lgts. Perimeter lgts medium ints.