

LEMOORE, CALIFORNIA

RNAV (GPS) RWY 14L

WAAS Chan 70209 W14A	APCH CRS 142°	Rwy Idg 13,502 TDZE 219 Arpt Elev 228
--	-------------------------	--

AL-5067 [USN]


LEMOORE NAS (REEVES FIELD) (KNLC)



DME/DME RNP-0.3 NA


MISSED APPROACH: Climb to 1 200, then climb left turn to 2000 direct STRAT and hold.

ATIS ★	APP CON	TOWER ★	GND CON	CLNC DEL	ASR/PAR
121.575 327.15	124.1 269.025 (N) 118.15 269.025 (S)	128.3 340.2	121.65 305.2	124.1 371.9	

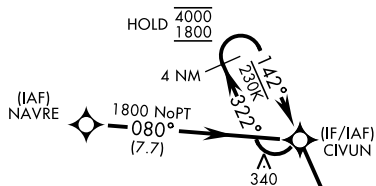


Simultaneous approaches authorized.
LNAV procedure NA during Simultaneous operations.
Use of FD or AP providing RNAV track guidance required
during simultaneous operations.

For uncompensated Baro-VNAV systems, LNAV/VNAV procedure NA below -15°C (5°F) and above 54°C (129°F).

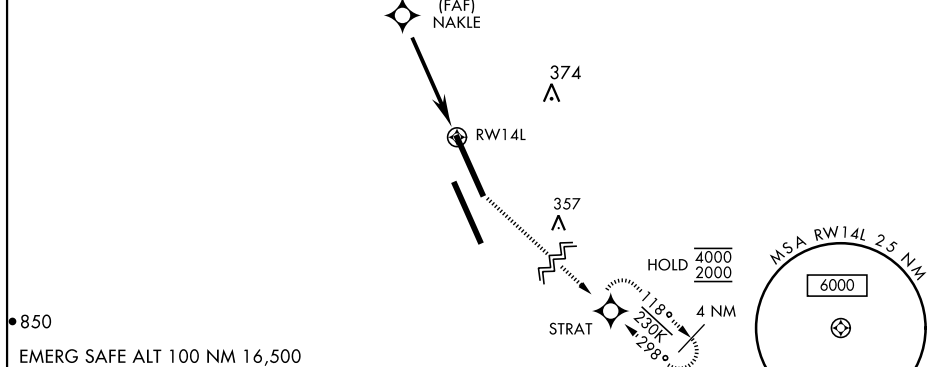

ELEV 228	TDZE 219
----------	----------

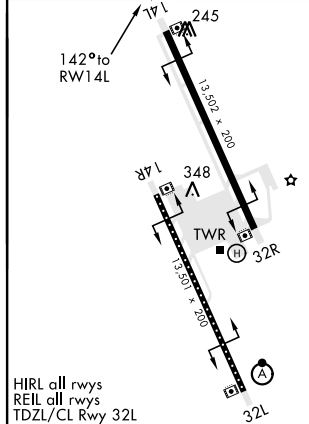

4 NM Holding Pattern

CIVUN

NAKLE

GP 3.00°
TCH 54

322°

142°

180°

0.8 NM to RW14L

4.8 NM

RW14L

CATEGORY	A	B	C	D
LPV DA	419-¾	200	(200-¾)	
LNAV/ VNAV DA	469-¾	250	(300-¾)	
LNAV MDA	520-1	301	(300-1)	
C CIRCLING	680-1	452 (500-1)	700-1½ 472 (500-1½)	780-2 552 (600-2)

LEMOORE, CALIFORNIA

36°20'N-119°57'W

LEMOORE NAS (REEVES FIELD) (KNLC)

Amdt 6 19MAY22

RNAV (GPS) RWY 14L

SW-2, 21 MAR 2024 to 18 APR 2024

SW-2, 21 MAR 2024 to 18 APR 2024