

WAAS
CH **77842**
W28A

APP CRS
281°

Rwy Idg
TDZE **732**
Apt Elev **732**

RNAV (GPS) RWY 28

BRECKINRIDGE COUNTY (I93)

RNP APCH.

▼

▲ NA


Baro-VNAV NA. Use Fort Knox altimeter setting, when not received, use Elizabethtown altimeter setting and increase LPV DA to 1047, LNAV/VNAV DA to 1185 and all MDA 20 feet.

MISSED APPROACH: Climb to 4000 direct RICKZ and hold, continue climb-in-hold to 4000.

KFTK ATIS ★
109.6

LOUISVILLE APP CON
132.075 327.0

CTAF
122.9 0

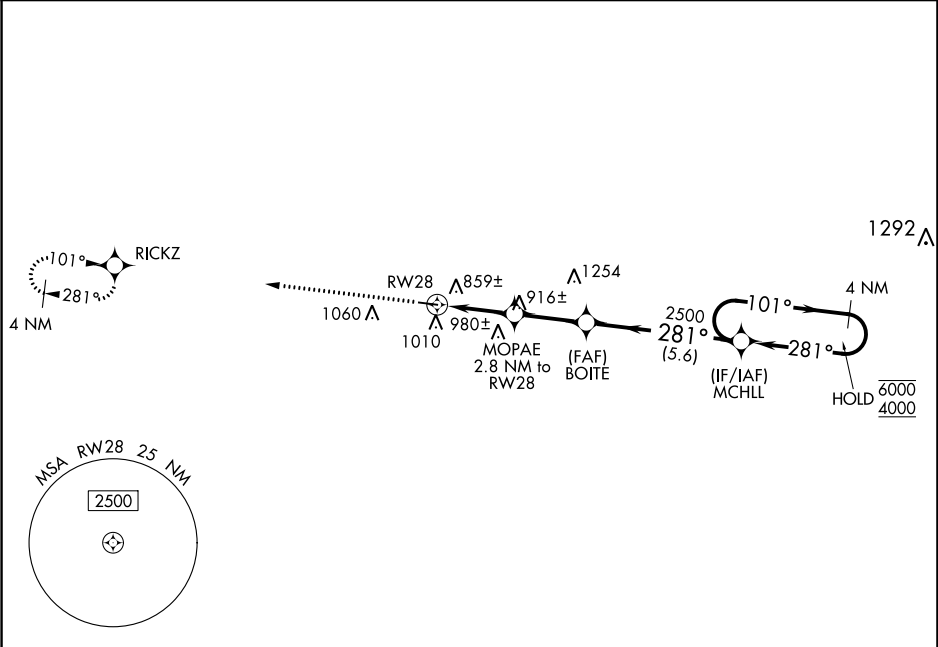

ELEV 732

TDZE 732

4000

RICKZ

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 27°).

*LNAV only.

MCHLL

4 NM Holding Pattern

BOITE

2500

MOPAE

2.8 NM to RWY 28

RWY 28

1660*

GP 3.00°

TCH 50

2.8 NM

2.6 NM

5.6 NM

CATEGORY	A	B	C	D
LPV DA	1040-1		308 (400-1)	
LNAV/VNAV DA	1178-1⅓		446 (500-1⅓)	
LNAV MDA	1180-1	448 (500-1)	1180-1⅓	448 (500-1⅓)
☐ CIRCLING	1380-1 648 (700-1)	1480-1 748 (800-1)	1480-2¼ 748 (800-2¼)	1480-2½ 748 (800-2½)

MIRL Rwy 10-28

REIL Rwys 10 and 28