

RNAV (RNP) Z RWY 28R

PITTSBURGH INTL (PIT)

APP CRS	Rwy Idg	10102
281°	TDZE	1174
	Apt Elev	1203


RNP AR APCH - GPS.

Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below -18°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to 1 3/8 SM.




MALSR

MISSED APPROACH: Climb to 4000 on track 281° to KANVE and track 341° to USUSE and track 060° to EWC VOR/DME and hold.

D-ATIS	PITTSBURGH APP CON	PITTSBURGH TOWER	GND CON	CLNC DEL
ARR 127.25	123.95 360.8	128.3 291.7	SOUTH 121.9 348.6	126.75 353.7
DEP 135.9			NORTH 127.8 348.6	

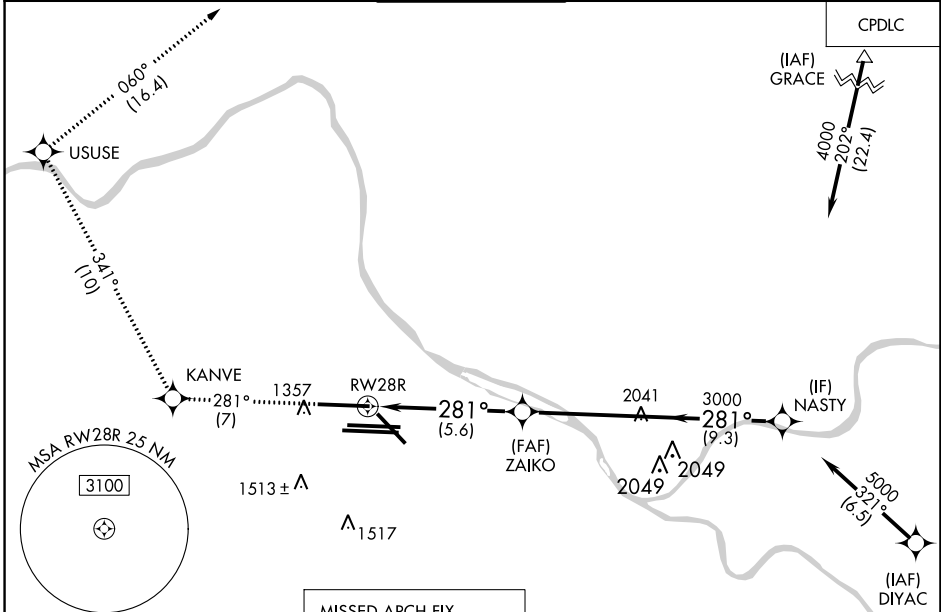

ELEV 1203	D	TDZE 1174
-----------	----------	-----------

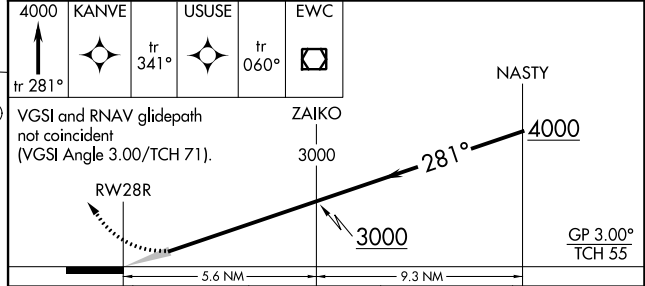

REIL Rwy 10C
HIRL all Rwys
TDZ/CL Rwys 10L, 10R, 28L, 28R, 28C, and 32

CATEGORY	A	B	C	D
RNP 0.30 DA		1675/55	501 (500-1)	

AUTHORIZATION REQUIRED

NE-4, 28 NOV 2024 to 26 DEC 2024

NE-4, 28 NOV 2024 to 26 DEC 2024