ILS or LOC RWY 31C

CHICAGO MIDWAY INTL (MDW)

LOC/DME I-MXT	APP CRS	Rwy Idg	5826
109.9	318°	TDZE	613
Chan 36		Apt Elev	620

DME and RADAR required.

Circling Rwy 31R NA at night. Rwy 31C helicopter visibility reduction below RVR 4000 NA.

MISSED APPROACH: Climb to 1100, then climbing left turn to 2100 on heading 150° and on EON VORTAC R-001 until crossing IGECY INT/EON 20 DME, then climb to 2600 to EON VORTAC and hold.

D-ATIS	CHICAGO APP CON	MIDWAY TOWER	GND CON	CLNC DEL	CPDLC
132.75	128.2 353.875	135.2 269.125	118.075	124.625	

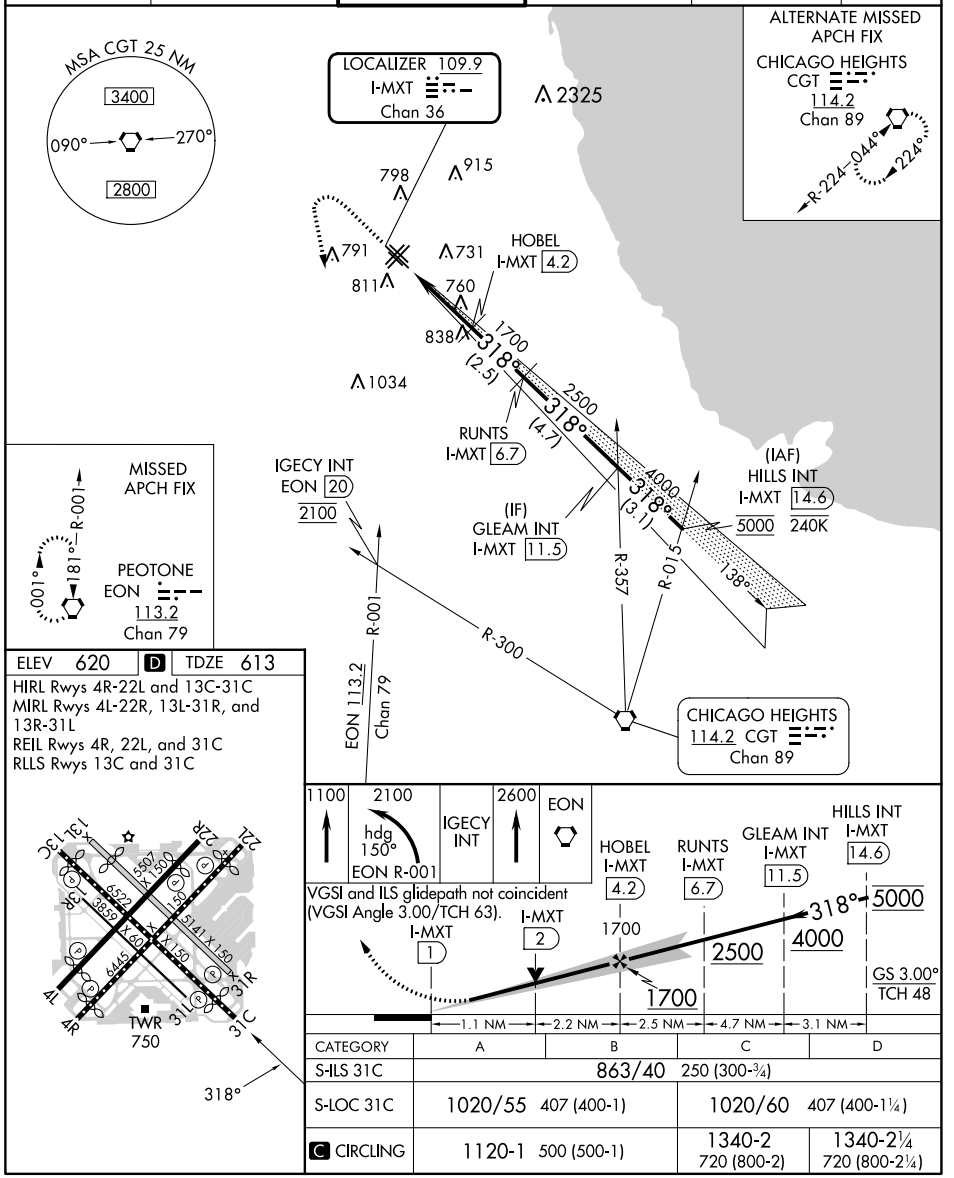

ELEV 620	D	TDZE 613

HIRL Rwys 4R-22L and 13C-31C
MIRL Rwys 4L-22R, 13L-31R, and 13R-31L
REIL Rwys 4R, 22L, and 31C
RLLS Rwys 13C and 31C

CATEGORY	A	B	C	D
S-ILS 31C	863/40 250 (300-¾)			
S-LOC 31C	1020/55 407 (400-1)		1020/60 407 (400-1¼)	
C CIRCLING	1120-1 500 (500-1)		1340-2 720 (800-2)	1340-2¼ 720 (800-2¼)

EC-3, 26 DEC 2024 to 23 JAN 2025
EC-3, 26 DEC 2024 to 23 JAN 2025