

WAAS CH <b>81822</b> <b>W06A</b>	APP CRS <b>055°</b>	Rwy Idg TDZE Apt Elev	<b>9002</b> <b>57</b> <b>66</b>
--	------------------------	-----------------------------	---------------------------------------




# RNAV (GPS) RWY 6

FRANCIS S GABRESKI (F'OK)

**⚠** Helicopter visibility reduction below 3/4 SM not authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Shirley altimeter setting: increase LPV DA to 325 feet and all Cats visibility 1/8 SM; increase LNAV/VNAV DA to 361 feet and all Cats visibility 1/8 SM; increase all MDAs 40 feet and LNAV Cats C/D visibility 1/8 SM and Circling Cat C visibility 1/4 SM. Baro-VNAV and VDP NA when using Shirley altimeter setting. Circling Rwy 15 NA at night.

**MISSED APPROACH:**  
Climb to 2000 direct MATTY and hold.

ASOS <b>119.925</b>	NEW YORK APP CON <b>125.975 343.65</b>	SUFFOLK COUNTY TOWER * <b>125.3 (CTAF) 0 236.6</b>	GND CON <b>121.8 225.4</b>
------------------------	---	---	-------------------------------

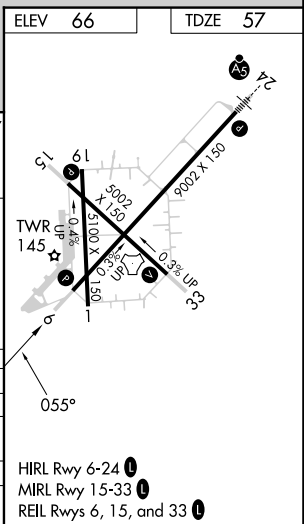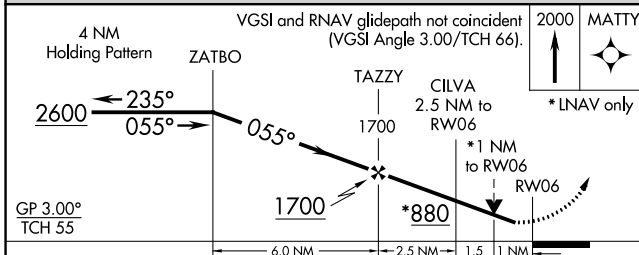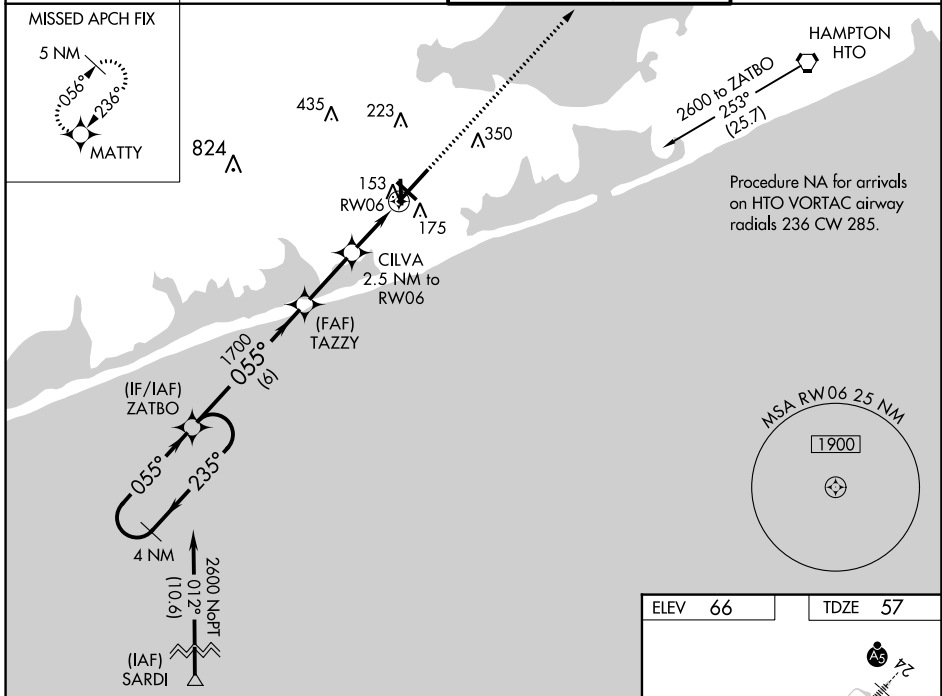

CATEGORY	A	B	C	D
LPV DA		307-3/4	250 (300-3/4)	
LNAV/VNAV DA		343-7/8	286 (300-7/8)	
LNAV MDA		420-1	363 (400-1)	
CIRCLING	600-1 534 (600-1)	620-1 554 (600-1)	700-1 3/4 634 (700-1 3/4)	740-2 1/4 674 (700-2 1/4)

NE-2, 26 DEC 2024 to 23 JAN 2025

NE-2, 26 DEC 2024 to 23 JAN 2025