


RNAV 1 - DME/DME/IRU or GPS.

RADAR required.


**TOP ALTITUDE:  
ASSIGNED BY ATC**

ATIS  
119.525  
CTAF  
126.975  
CLNC DEL  
132.075  
HOUSTON DEP CON  
123.8 257.7

TAKEOFF MINIMUMS  
Rwys 18, 36: Standard with minimum  
climb of 500'/NM to 680.

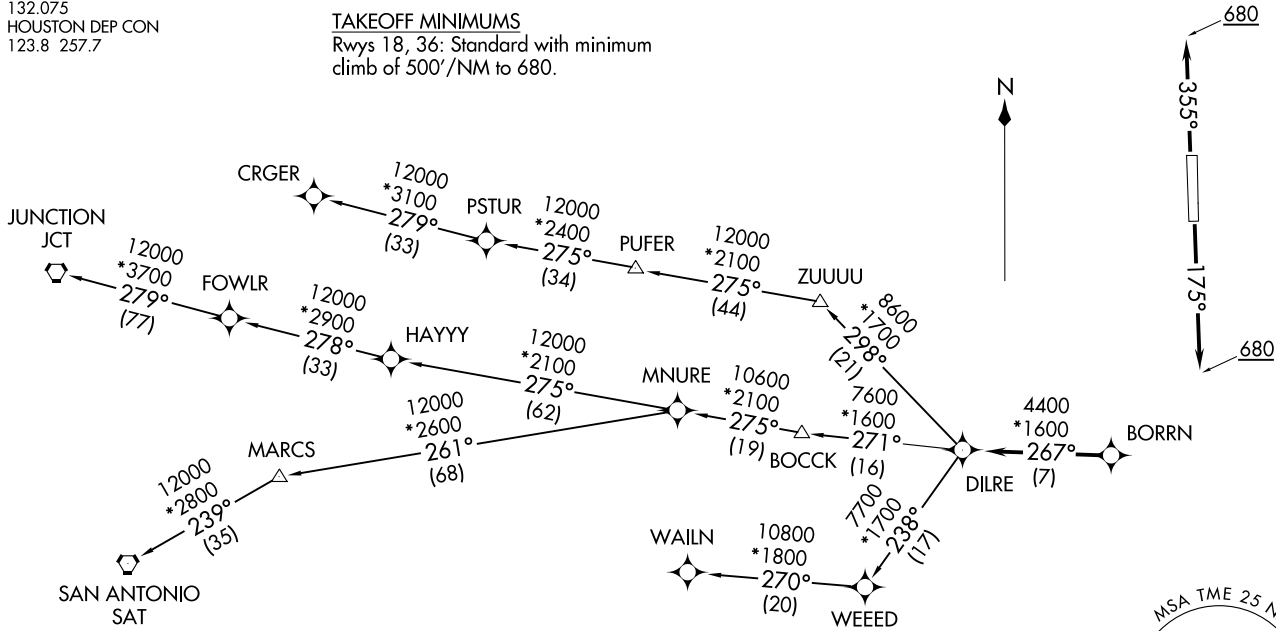

NOTE: CRGER-TRANSITION ATC assigned only for aircraft departing 54T, AXH, EFD, GLS, HPY, IWS, LBX, LVJ, SGR, TME, T00, T41.



NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)

BORRN SIX DEPARTURE (RNAV)  
(BORRN6.BORRN) 30NOV23

HOUSTON, TEXAS  
HOUSTON EXEC (TME)

(BORRN6.BORRN) 23334  
BORRN SIX DEPARTURE (RNAV)

HOUSTON EXEC (TME)  
HOUSTON, TEXAS

AI-10328 (FAA)

# BORRN SIX DEPARTURE (RNAV)



## DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 18: Climb on heading 175° to 680, for RADAR vectors to BORRN, thence. . . .

TAKEOFF RUNWAY 36: Climb on heading 355° to 680, for RADAR vectors to BORRN, thence. . . .

. . . .on track 267° to DILRE, then on (transition). Maintain ATC assigned altitude. Expect filed altitude 10 minutes after departure.

CRGER TRANSITION (BORRN6.CRGER)

JUNCTION TRANSITION (BORRN6.JCT)

MNURE TRANSITION (BORRN6.MNURE)

SAN ANTONIO TRANSITION (BORRN6.SAT)

WAILN TRANSITION (BORRN6.WAILN)

SC-5, 26 DEC 2024 to 23 JAN 2025

SC-5, 26 DEC 2024 to 23 JAN 2025