




LOC I-HEF 109.1	APP CRS 161°	Rwy Idg 6200
		TDZE 192
		Apt Elev 192

ILS or LOC RWY 16L

MANASSAS RGNL/HARRY P DAVIS FLD (HEF)

<p>When local altimeter setting not received, use Dulles altimeter setting and increase DA 49 feet, all MDA 60 feet, and increase Cat C/D Circling visibility ¼ mile.</p>	<p>MALS R</p>	<p>MISSED APPROACH: Climb to 700, then climbing right turn to 3000 direct CSN VORTAC and hold.</p>

ATIS 125.175	POTOMAC APP CON 128.525 306.925	MANASSAS TOWER * 133.1 (CTAF) 360.75	GND CON 121.8	CLNC DEL 120.2
------------------------	---	--	-------------------------	--------------------------

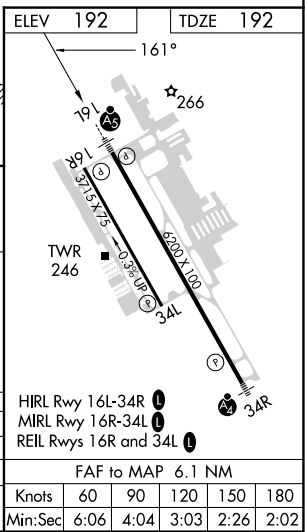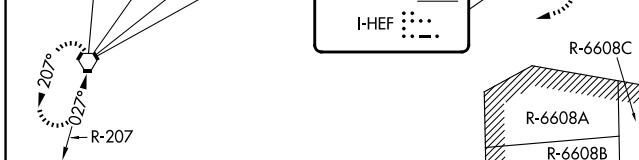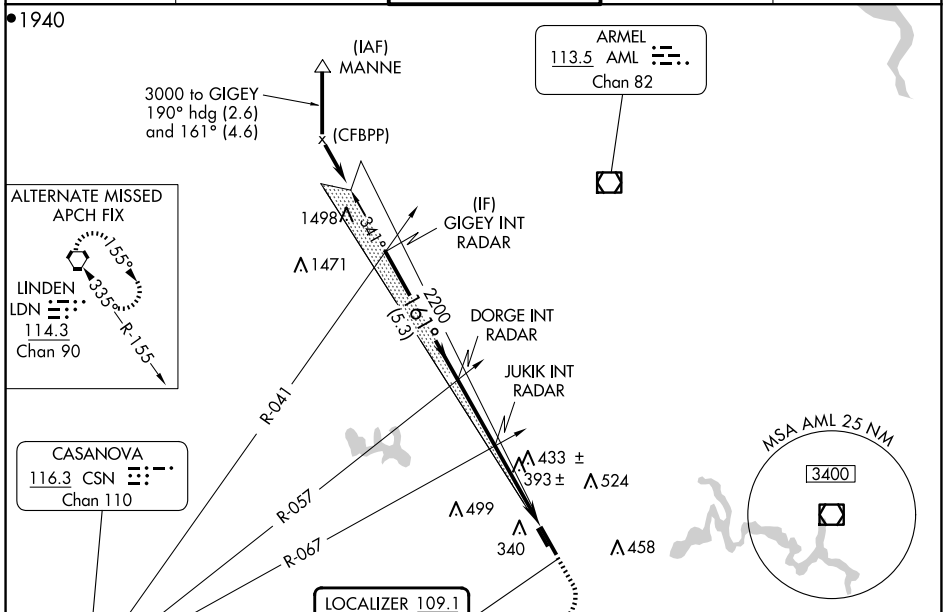

CATEGORY	A	B	C	D	
S-ILS 16L	392-½				200 (200-½)
S-LOC 16L	660-½	468 (500-½)	660-1	468 (500-1)	FAF to MAP 6.1 NM
CIRCLING	720-1	740-1	840-1¾	880-2¼	Knots 60 90 120 150 180
	528 (600-1)	548 (600-1)	648 (700-1¾)	688 (700-2¼)	Min:Sec 6:06 4:04 3:03 2:26 2:02

NE-3, 23 JAN 2025 to 20 FEB 2025

NE-3, 23 JAN 2025 to 20 FEB 2025