

LOC/DME I-FLZ 111.7 Chan 54	APP CRS 221°	Rwy Idg TDZE Apt Elev	4499 1957 1957
---	------------------------	-----------------------------	---

ILS or LOC RWY 22R
FELTS FLD (SFF)

DME required.



 Circling NA northwest of Rwy 4L-22R. Circling Rwy 22L NA at night.
 Rwy 22R helicopter visibility reduction below $\frac{3}{4}$ SM NA. For inop
 -16°C ALS, increase S-ILS Cat A/B/C visibility to $\frac{7}{8}$ SM, increase S-LOC
Cat A visibility to 1 SM and Cat C visibility to $2\frac{1}{2}$ SM.

MALSRL




MISSED APPROACH: Climb to 3300 then climbing left turn to 5000 on heading 200° and GEG VORTAC R-080 to GEG VORTAC and hold.

ATIS 120.55	SPOKANE APP CON 133.35 263.0	FELTS TOWER ★ 132.5 (CTAF) 0 239.025	GND CON 121.7	CLNC DEL 121.7	UNICOM 122.95
-----------------------	--	--	-------------------------	--------------------------	-------------------------

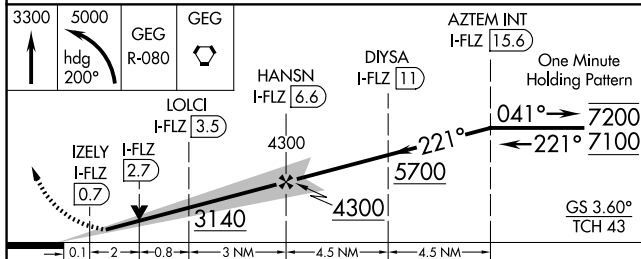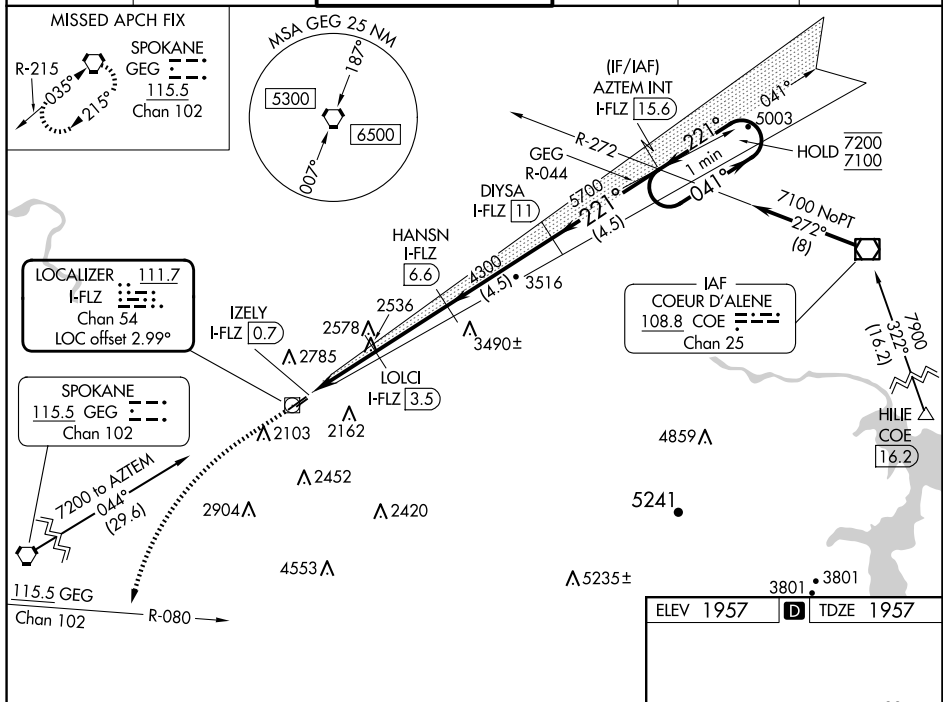

CATEGORY	A	B	C	D
S-ILS 22R	2257-1/2 300 (300-1/2)			NA
S-LOC 22R	2800-3/4 843 (900-3/4)		2800-17/8 843 (900-17/8)	NA
CIRCLING	2800-11/4 843 (900-11/4)	2800-11/2 843 (900-11/2)	3100-3 1143 (1200-3)	NA

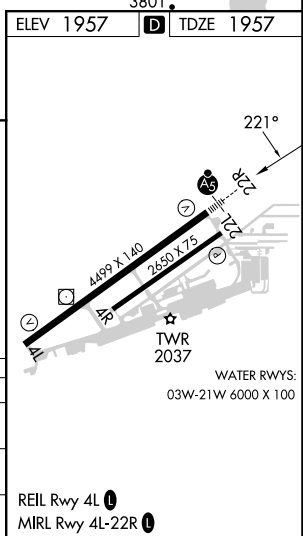

ILS or LOC RWY 22R