

20030

|                                                 |                        |                                                               |
|-------------------------------------------------|------------------------|---------------------------------------------------------------|
| LOC/DME I-ACT<br><b>109.7</b><br>Chan <b>34</b> | APP CRS<br><b>187°</b> | Rwy Idg <b>6605</b><br>TDZE <b>505</b><br>Apt Elev <b>516</b> |
|-------------------------------------------------|------------------------|---------------------------------------------------------------|

ILS or LOC RWY 19  
WACO RGNL (ACT)

DME required.


**T**  
**A** \*\* RVR 1800 authorized with use of FD or AP or HUD to DA.

ASR

MALS

**MISSED APPROACH:** Climb to 1500 then climbing left turn to 4000 on ACT VORTAC R-164 to BOSEL 14 DME and hold, continue climb-in-hold to 4000.

|                       |                                         |                                             |                         |                         |
|-----------------------|-----------------------------------------|---------------------------------------------|-------------------------|-------------------------|
| ATIS<br><b>123.85</b> | WACO APP CON ★<br><b>127.65 227.125</b> | WACO TOWER ★<br><b>119.3 (CTAF) 0 257.8</b> | GND CON<br><b>121.9</b> | UNICOM<br><b>122.95</b> |
|-----------------------|-----------------------------------------|---------------------------------------------|-------------------------|-------------------------|

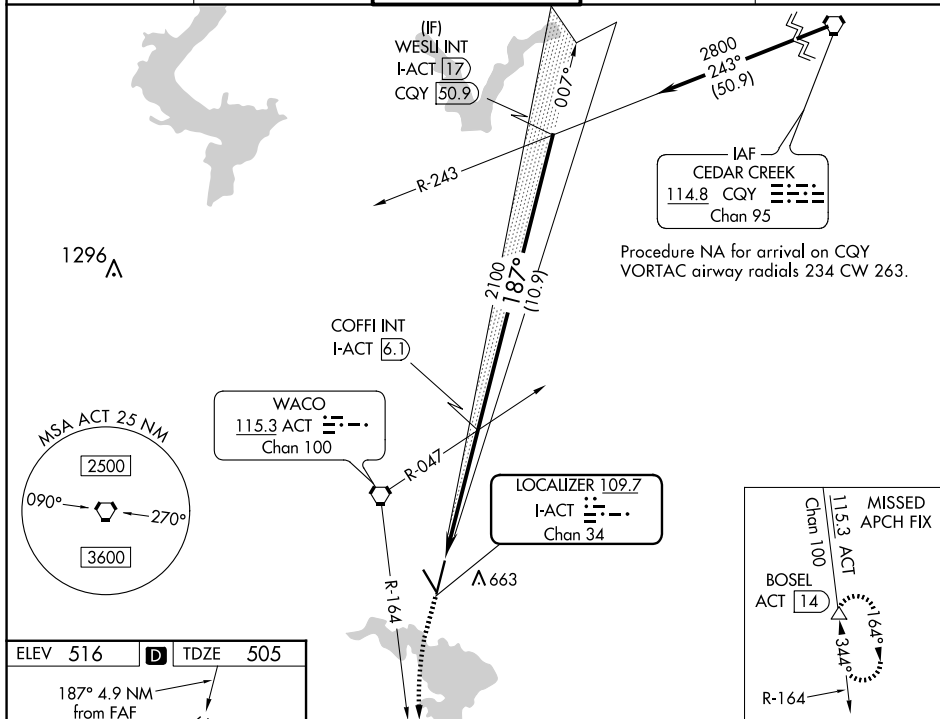

REIL Rwy 14  
HIRL Rwy 1-19  
MIRL Rwy 14-32

| FAF to MAP 4.9 NM |      |      |      |      |      |
|-------------------|------|------|------|------|------|
| Knots             | 60   | 90   | 120  | 150  | 180  |
| Min:Sec           | 4:54 | 3:16 | 2:27 | 1:58 | 1:38 |

|                                       |                      |                               |                              |                       |
|---------------------------------------|----------------------|-------------------------------|------------------------------|-----------------------|
| 1500<br>↑                             | 4000<br>ACT<br>R-164 | BOSEL<br>△                    | WESLI INT<br>I-ACT <u>17</u> |                       |
| *LOC only.                            |                      | COFFI INT<br>I-ACT <u>6.1</u> | 2800                         |                       |
| I-ACT <u>1.3</u><br>*I-ACT <u>2.3</u> |                      | 2100<br>187°<br>2100          | GS 3.00°<br>TCH 55           |                       |
| 1.1                                   |                      | 3.8 NM                        | 10.9 NM                      |                       |
| CATEGORY                              | A                    | B                             | C                            | D                     |
| S-ILS 19**                            | 705/24 200 (200-½)   |                               |                              |                       |
| S-LOC 19                              | 900/24 395 (400-½)   | 900/35 395 (400-¾)            |                              |                       |
| CIRCLING                              | 940-1<br>424 (500-1) | 980-1<br>464 (500-1)          | 1020-1½<br>504 (600-1½)      | 1160-2<br>644 (700-2) |

WACO, TEXAS  
Amdt 17 30JAN20

31°37'N-97°14'W

WACO RGNL (ACT)  
ILS or LOC RWY 19

SC-3, 17 APR 2025 to 15 MAY 2025