

WAAS CH 53443 W29A	APP CRS 290°	Rwy Idg TDZE Apt Elev	5600 212 212
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 29

SAN LUIS OBISPO COUNTY RGNL (SBP)

RNP APCH


- ⚠ Circling to Rwy 25 NA at night. Circling NA north of Rwy 11-29.
Rwy 29 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0° C or above 52° C.
- MISSED APPROACH: Climb to 1100 then climbing left turn to 4100 direct WUNUL and hold, continue climb-in-hold to 4100.

ATIS 120.6	SANTA BARBARA APP CON★ 127.725 244.575	SAN LUIS TOWER★ 124.0 (CTAF) 0 379.9	GND CON 121.6	UNICOM 122.95
----------------------	--	--	-------------------------	-------------------------

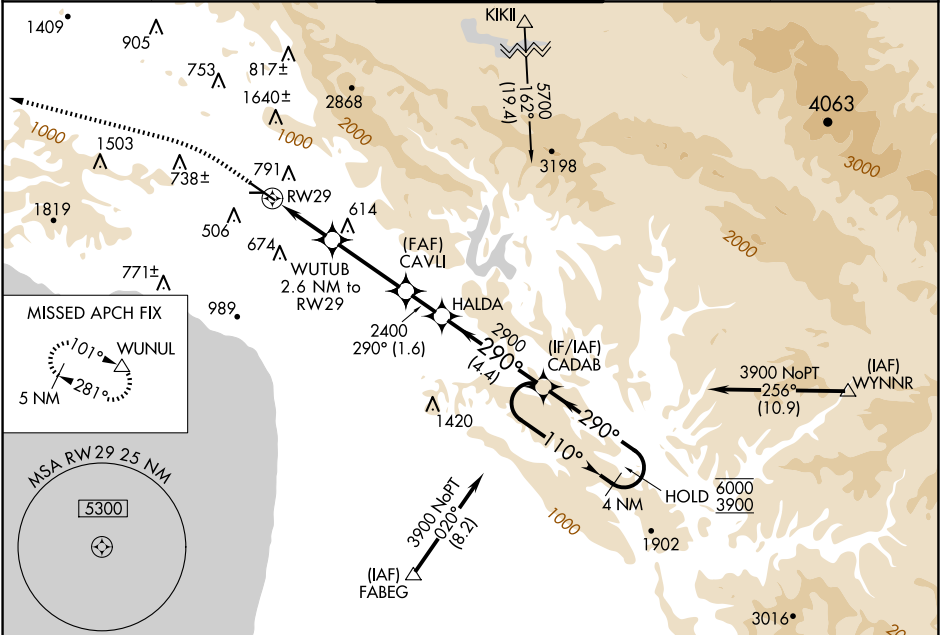

ELEV 212	D	TDZE 212
----------	----------	----------

Procedure NA for arrivals at FABEG on V27, T261 southeast bound.

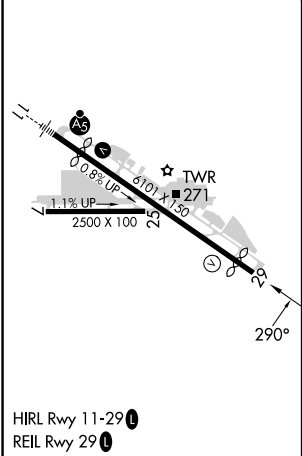

1100 ↑	4100 ↶	WUNUL △	4 NM Holding Pattern *LNAV only WUTUB 2.6 NM to RW29 CAVII 2400 HALDA CADAB 110° → 6000 ← 290° 3900 290° 2900 1220* 2400 GP 3.45° TCH 52 2.6 NM 3.2 NM 1.6 NM 4.4 NM			
CATEGORY	A		B		C	D
LPV DA	831-1¼ 619 (700-1¼)					
LNAV/VNAV DA	835-1¼ 623 (700-1¼)					
LNAV MDA	1000-1 788 (800-1)	1000-1¼ 788 (800-1¼)	1000-2½ 788 (800-2½)			
CIRCLING	1000-1 788 (800-1)	1220-1½ 1008 (1100-1½)	1460-3 1248 (1300-3)	1560-3 1348 (1400-3)		