


WAAS CH 82332 W36A	APP CRS 001°	Rwy Idg 4098 TDZE 572 Apt Elev 573
--	------------------------	---

RNAV (GPS) RWY 36
SALEM-LECKRONE (SLO)

▼ Baro-VNAV NA when using Centralia altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). When local altimeter setting not received, use Centralia altimeter setting: increase LPV DA to 1045 feet and visibility 1/8 SM; increase LNAV/VNAV DA to 1093 feet; increase all MDAs 40 feet and Circling Cats C/D visibility 1/4 SM. Procedure NA at night. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH:
Climb to 2600 direct
FDHJ and hold.

AWOS-3PT 118.525	KANSAS CITY CENTER 127.7 351.825	UNICOM 122.725 (CTAF) 0
----------------------------	--	-----------------------------------

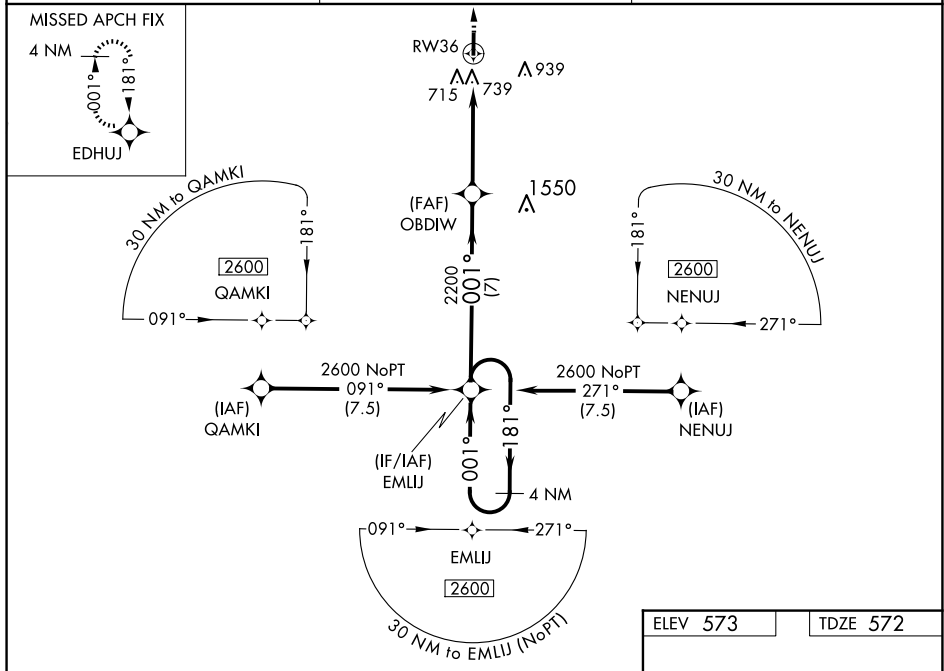

2600 ↑ EDHJJ

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 28)

4 NM Holding Pattern

OBDIW 2200

EMLIJ

181° → 2600

← 001°

2200

RW36

5 NM

7 NM

GP 3.00° TCH 40

CATEGORY	A	B	C	D
LPV DA	1017-1½	445 (500-1½)		
RNAV/VNAV DA	1065-1¾	493 (500-1¾)		
RNAV MDA	1040-1 468 (500-1)	1040-1¾ 468 (500-1¾)		
CIRCLING	1040-1 467 (500-1)	1380-2¼ 807 (900-2¼)	1380-2½ 807 (900-2½)	

