

LOC I-GZX 109.9	APP CRS 129°	Rwy Ldg TDZE Apt Elev	9604 632 661
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 13

GENERAL DOWNING - PEORIA INTL (PIA)

ADF required. DME required for procedure entry at GREGG.


⚠

Circling Rwy 13, 31 NA at night. When local altimeter setting not received, use AAA altimeter setting and increase S-ILS* 13 DA to 921 feet; increase all MDAs 100 feet; and Circling visibility Cat C/D ½ SM. For inop ALS when using AAA altimeter setting, increase S-ILS 13* all Cats visibility to RVR 4500. * RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALS

MISSED APPROACH: Climb to 2500 direct TUNGG LOM and hold, continue climb-in-hold to 2500.

ATIS 126.1 282.2	SAINT LOUIS APP CON 125.8 269.2	PEORIA TOWER 124.0 353.85	GND CON 121.85 348.6	CLNC DEL 124.675 317.55
----------------------------	---	-------------------------------------	--------------------------------	-----------------------------------

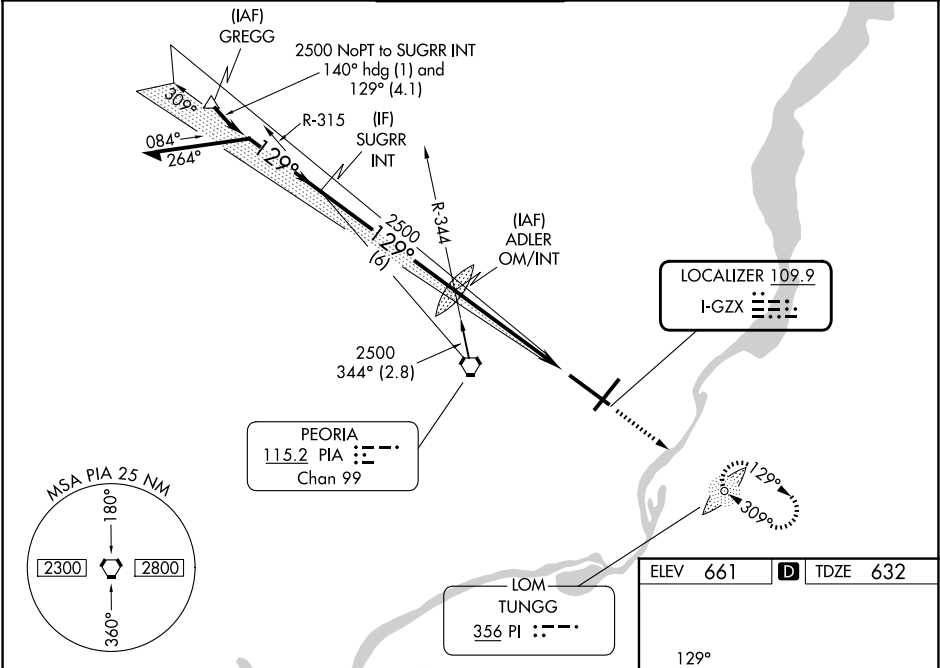

Remain within 10 NM

ADLER OM/INT

2500

309°

2363

2500

129°

GS 3.00° TCH 56

5.3 NM

2500

PI

ELEV 661

D

TDZE 632

129°

13

AS

10104 X 150

TWR

8004 X 150

31

AS

Up

AS

CATEGORY	A	B	C	D
S-ILS 13 *	832/24		200 (200-½)	
S-LOC 13	1180/24	548 (600-½)	1180/60	548 (600-1¼)
CIRCLING	1180-1	519 (600-1)	1180-1½ 519 (600-1½)	1400-2¼ 739 (800-2¼)

HIRL Rwy 4-22 and 13-31

FAF to MAP 5.3 NM

Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46