


APP CRS	Rwy Ldg	10200
258°	TDZE	926
	Apt Elev	944

RNAV (RNP) Z RWY 26L

ONTARIO INTL (ONT)

RNP AR APCH - GPS.	ALSF-2	MISSED APPROACH: Climb to 3400 on track 258° to AXOYO and track 174° to LAKVE and track 122° to MRIAM and track 079° to ADRYN and hold.
▼ For uncompensated Baro-VNAV systems, procedure NA below 1°C or above 54°C. For inop ALS, increase RNP 0.10 visibility all Cats to RVR 4500, RNP 0.17 visibility all Cats to RVR 5000, RNP 0.30 visibility all Cats to RVR 6000.		

D-ATIS	SOCAL APP CON	ONTARIO TOWER	GND CON	CLNC DEL	CPDLC
124.25	127.0 318.2	120.6 360.775	121.9 257.8	132.9	

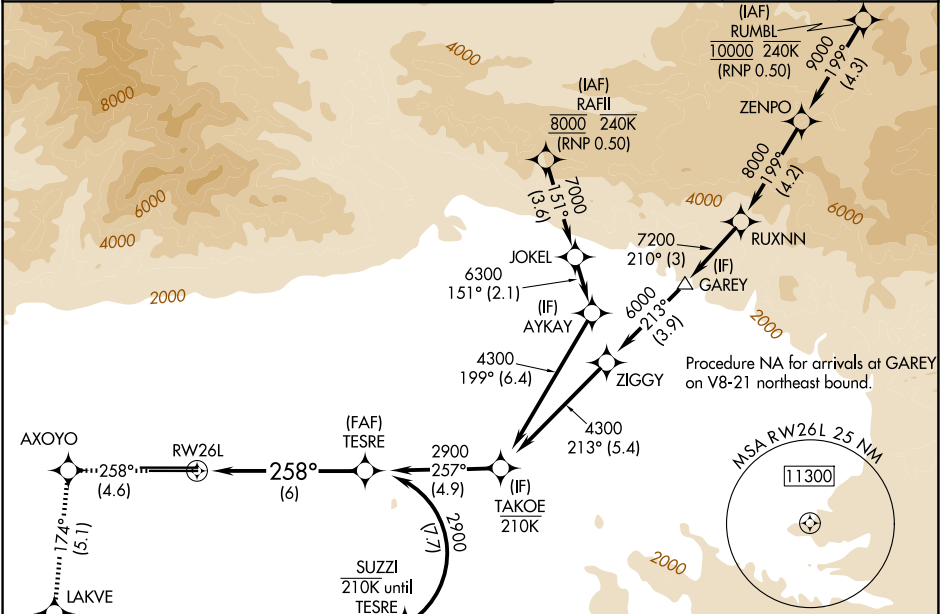

ELEV 944	TDZE 926
VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 74).	
See planview for multiple IF locations.	
GP 3.00° TCH 58	
TDZ/CL Rwy 8L, 26R and 26L	
HIRL Rwy 8L-26R and 8R-26L	
CATEGORY	
RNP 0.10 DA	
RNP 0.17 DA	
RNP 0.30 DA	
AUTHORIZATION REQUIRED	