


TACAN RWY 6

TACAN Chan	EDF 81	APCH CRS 062°	Rwy Idg 10,000 TDZE 175 Arpt Elev 213	[USAF]	ELMENDORF AFB (PAED)			
▼ * When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CDE vis to 1½ miles. ** Circling not authorized south of Rwy 6-24. *** Circling not authorized SW of Rwy 6 and 34.				ALSIF-1 	MISSED APPROACH: Climbing left turn to 3000 via EDF R-307 to HOBBS and hold, continue climb-in-hold to 3000.			
ATIS ★ 124.3 273.5		ANCHORAGE APP CON 118.6 290.5 (N) 123.8 259.3 (S)		TOWER 127.2 352.05		GND CON 121.8 275.8	CLNC DEL 128.8 306.925	PAR

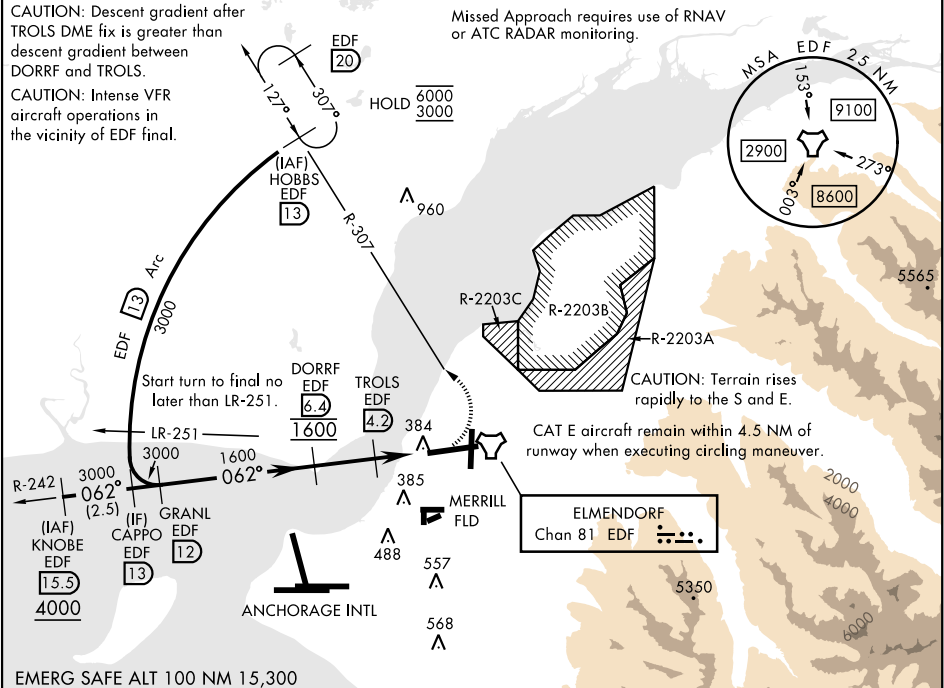

EMERG SAFE ALT 100 NM 15,300

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 77).						ELEV 213		TDZE 175			
CAPPO EDF 13 GRANL EDF 12 DORRF EDF 6.4 TROLS EDF 4.2 CCOLE EDF 2.8 EDF TACAN 3000 3000 1600 900 2.2 NM 1.4 NM 0.6 NM 062° 062° 3000 EDF R-307 HOBBS 3000 ↑ TROLS to MAP ↑ 3.16° TCH 57											
CATEGORY	A		B		C		D		E		
S-6 *	640/24		465 (500-½)		640/50		465		(500-1)		
CIRCLING **	840-1		627 (700-1)		840-1¾ 627 (700-1¾)		840-2 627 (700-2)		940-2½ 727 (800-2½)		
RWY 34 CIRCLING MINIMUMS											
CIRCLING ***	840-1		627 (700-1)		920-2 707 (800-2)		1020-2½ 807 (900-2½)		1480-3 1267 (1300-3)		
						HIRL Rwy 6-24 TDZL/CL Rwy 6					

TACAN RWY 6