


LOC/DME I-FLQ 110.3 Chan 40	APP CRS 176°	Rwy Ldg 17C 13400 17R 13400 TDZE 562 Apt Elev 607	ILS or LOC RWY 17C DALLAS-FORT WORTH INTL (DFW)	
---	------------------------	---	--	--

DME and RADAR required. Simultaneous approach authorized with Rwy 17L, 18L/R. Inop table does not apply to sidestep 17R Cats A and B.		Rwy 17C ALSIF-2 	Rwy 17R MALSR 	MISSED APPROACH: Climb on heading 176° to cross YUPRU/2.8 DME/RADAR at or below 3000, then climbing right turn to 4000 on TTT VOR/DME R-176 to JASPA/TTT 35 DME and hold.	
D-ATIS ARR 123.775 DEP 135.925	LONE STAR APP CON 127.075	DFW TOWER 126.55 127.5 EAST 124.15 134.9 WEST		GND CON 121.65 121.8 EAST 121.85 WEST	CLNC DEL 128.25 CPDLC

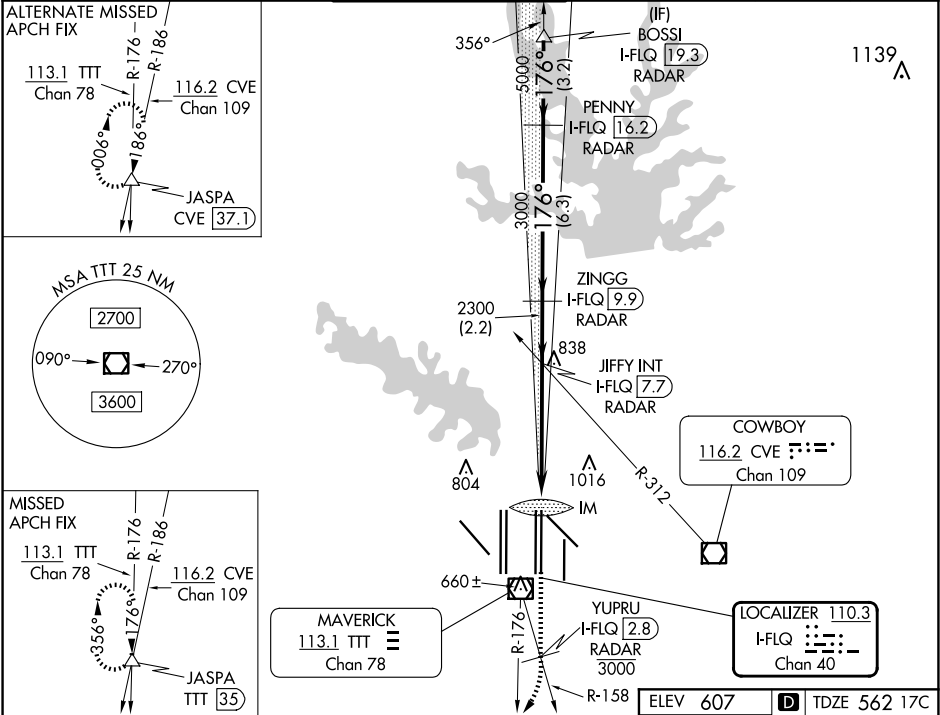

 YUPRU I-FLQ 2.8 3000 TTT R-176	JASPA 	VGSI and ILS glidepath not coincident (VGSI Angle 3.00°/TCH 74°).		BOSSI I-FLQ 19.3 RADAR
*LOC only.		JIFFY INT I-FLQ 7.7 RADAR	ZINGG I-FLQ 9.9 RADAR	PENNY I-FLQ 16.2 RADAR
		GS 3.00° TCH 58		
CATEGORY	A	B	C	D
S-ILS 17C	762/18		200 (200-1/2)	
S-LOC 17C	1000/24	438 (400-1/2)	1000/40	438 (400-3/4)
SIDESTEP 17R	1140/55 573 (600-1)		1140-1 1/2 573 (600-1 1/2)	

HIRL all Rwys
REIL Rwys 13L and 31L
TDZ/CL all Rwys except 13L and 31L