

WAAS CH 58203 W18A	APP CRS 179°	Rwy Ldg TDZE 686 Apt Elev 691	4002
--	------------------------	---	-------------

RNAV (GPS) RWY 18


LITCHFIELD MUNI (3LF')

RNP APCH - GPS.

Baro-VNAV and VDP NA when using Taylorville altimeter setting. Rwy 18 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Taylorville altimeter setting and increase LPV DA to 1025 feet and all visibilities ½ SM, increase LNAV/VNAV DA to 1146 feet and all visibilities ¼ SM, increase all MDAs 80 feet and LNAV visibility Cat C ½ SM.

MISSED APPROACH: Climb to 3000 direct OREPE and hold.

AWOS-3PT 118.175	ST. LOUIS APP CON 124.2 353.9	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

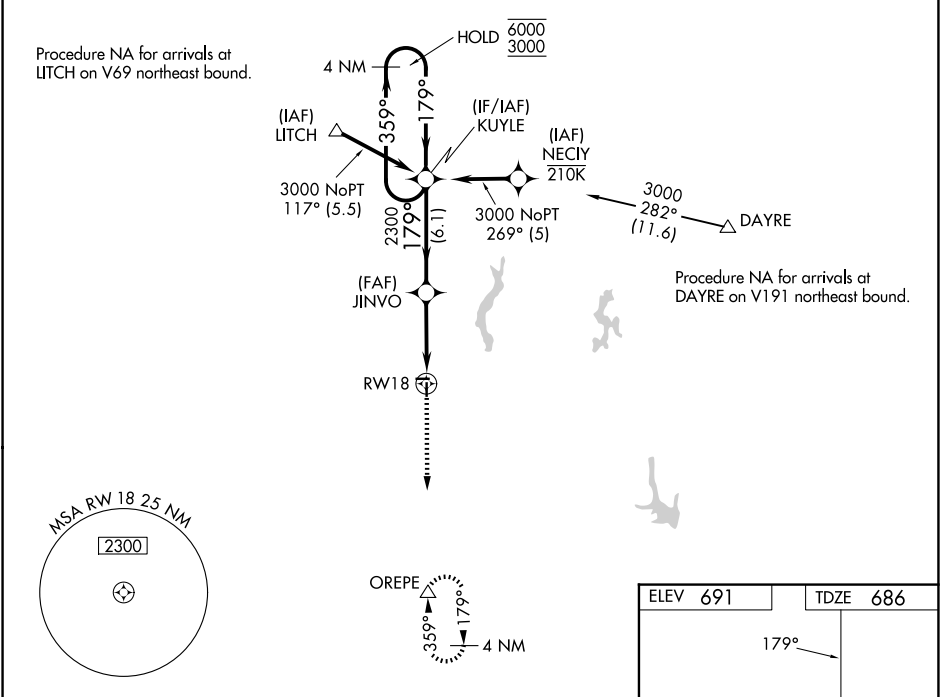

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 23).		3000	OREPE
KUYLE		JINVO		1.3 NM to RW18	
6000 ← 359°		2300		RW18	
3000 → 179°		2300		1.3	
GP 3.00°		2300		1.3	
TCH 40		2300		1.3	
6.1 NM		3.6 NM		1.3	
CATEGORY	A	B	C	D	
LPV DA	952-7/8 266 (300-7/8)			NA	
LNAV/VNAV DA	1073-1 387 (400-1 3/8)			NA	
LNAV MDA	1120-1 434 (500-1)			NA	

