

WAAS CH 50139 W34A	APP CRS 337°	Rwy Ldg TDZE Apt Elev	5001 769 774
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 34

CASTROVILLE MUNI (CVB)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lackland AFB (Kelly Fld Annex) altimeter setting: increase all DA/MDA 60 feet and all visibilities ¼ mile. Helicopter visibility reduction below ¾ SM NA. Night landing: Rwy 16 NA.

MISSED APPROACH: Climb to 1300 then climbing left turn to 3000 direct SHEOL and hold.

AWOS-3 119.25	SAN ANTONIO APP CON 118.05 353.5	UNICOM 122.8 (CTAF) 0
-------------------------	--	---------------------------------

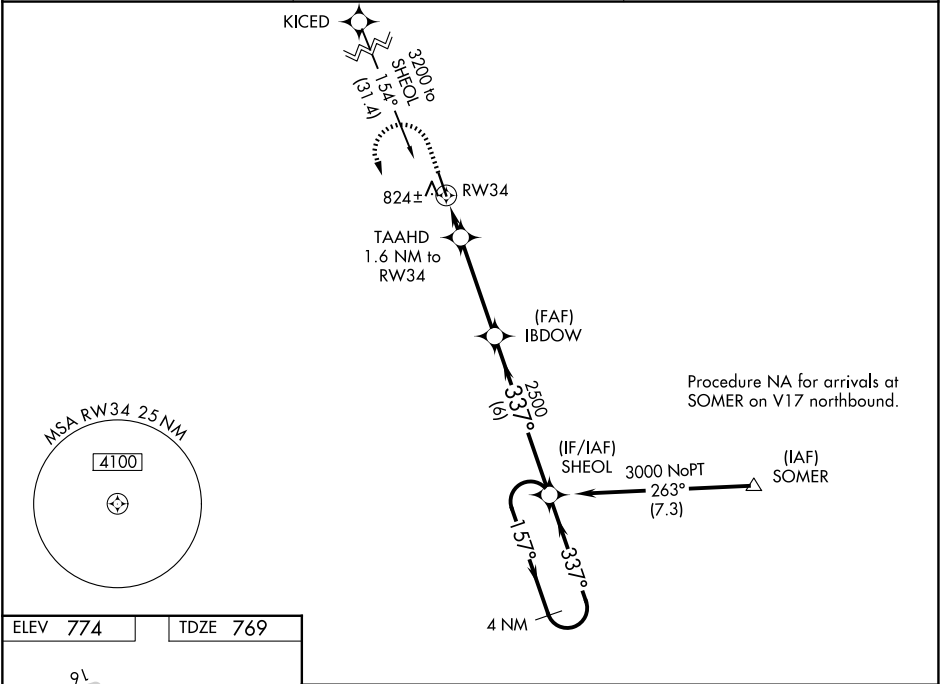

306.0 x 7.5

34

337°

MIRL Rwy 16-34

1300

↑

3000

↶

SHEOL

✳

*LNAV only.

TAAHD 1.6 NM to RW34

IBDOW

SHEOL

4 NM Holding Pattern

1.6 NM

3.7 NM

6 NM

GP 3.00°

TCH 40

CATEGORY	A		B	C	D
LPV DA	1019-7⁄8 250 (300-7⁄8)				NA
LNAV/VNAV DA	1127-1¼ 358 (400-1¼)				NA
LNAV MDA	1200-1 431 (500-1)	1200-1½ 431 (500-1½)		NA	
CIRCLING	1200-1 426 (500-1)	1380-1 606 (700-1)	1580-2¼ 806 (900-2¼)	NA	

SC-3, 27 NOV 2025 to 25 DEC 2025

SC-3, 27 NOV 2025 to 25 DEC 2025